



## *AlGaInP Visible Laser Diode*

## **ADL-65052TL**

DATE : 2005/10/18 Ver 1.0

### ★650nm 5mW 50°C Low Current Operation

#### • Features


1. Low operating current
2. High efficiency
3. FFP single lateral mode

#### • Applications

1. Laser pointers
2. Industrial laser markers / measuring instruments
3. Bar code readers

#### • Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P <sub>O</sub>	CW	7	mW
Reverse voltage (LD)	V <sub>RL</sub>	-	2	V
Reverse voltage (PD)	V <sub>RD</sub>	-	30	V
Forward current (PD)	I <sub>FD</sub>	-	10	mA
Case temperature	T <sub>C</sub>	-	-10~+50	°C
Storage temperature	T <sub>S</sub>	-	-40~+85	°C

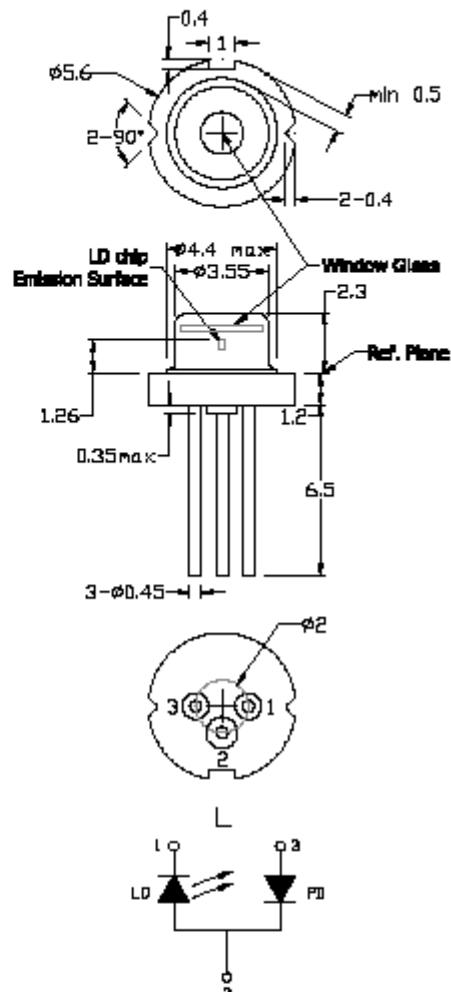

#### • Electrical and optical characteristics (T<sub>c</sub>=25 °C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	645	655	660	nm	P <sub>O</sub> =5mW
Threshold current	I <sub>th</sub>	-	15	20	mA	
Operating current	I <sub>op</sub>	-	20	22	mA	P <sub>O</sub> =5mW
Operating voltage	V <sub>op</sub>	-	2.2	2.5	V	P <sub>O</sub> =5mW
Differential efficiency	η	0.5	1.0	1.4	mW/mA	P <sub>O</sub> =3-5mW
Monitor current	I <sub>M</sub>	0.05	0.1	0.3	mA	P <sub>O</sub> =5mW, V <sub>RD</sub> =5V
Parallel divergence angle	θ <sub>  </sub>	6	8	12	deg	
Perpendicular divergence angle	θ <sub>⊥</sub>	24	27	32	deg	
Parallel FFP deviation angle	Δθ <sub>  </sub>	-3	0	+3	deg	P <sub>O</sub> =5mW
Perpendicular FFP deviation angle	Δθ <sub>⊥</sub>	-3	0	+3	deg	
Emission point accuracy	ΔxΔyΔz	-80	0	+80	um	

#### • Precautions

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.



# ROITHNER LASERTECHNIK

Wiedner Hauptstraße 76, A-1040 Vienna, Austria

Tel.: ++43 1 586 52 43-0, Fax -44, office@roithner-laser.com



## AlGaInP Visible Laser Diode

**ADL-65052TL**

DATE : 2005/10/18 Ver 1.0

