

BUL38D

HIGH VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR

- STM PREFERRED SALESTYPE
- HIGH VOLTAGE CAPABILITY
- LOW SPREAD OF DYNAMIC PARAMETERS
- MINIMUM LOT-TO-LOT SPREAD FOR RELIABLE OPERATION
- LOW BASE-DRIVE REQUIREMENTS
- VERY HIGH SWITCHING SPEED
- FULLY CHARACTERISED AT 125°C
- HIGH RUGGEDNESS
- INTEGRATED ANTIPARALLEL COLLECTOR-EMITTER DIODE


APPLICATIONS


- ELECTRONIC TRANSFORMERS FOR HALOGEN LAMPS
- SWITCH MODE POWER SUPPLIES



The BUL38D is manufactured using high voltage Multi Epitaxial Planar technology for high switching speeds and high voltage withstand capability.

The BUL series is designed for use in lighting applications and low cost switch-mode power supplies.

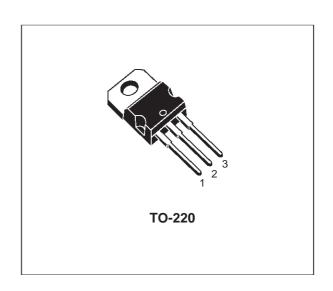

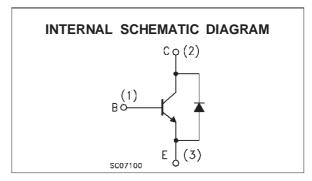

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{CES}	Collector-Emitter Voltage (V _{BE} = 0)	800	V
V _{CEO}	Collector-Emitter Voltage (IB = 0)	450	V
V _{EBO}	Emitter-Base Voltage (IC = 0)	9	V
Ic	Collector Current	5	V
I _{CM}	Collector Peak Current (t _p <5 ms)	10	А
Ι _Β	Base Current	2	А
I _{BM}	Base Peak Current (t _p <5 ms)	4	Α
P _{tot}	Total Dissipation at Tc = 25 °C	80	W
T _{stg}	Storage Temperature	-65 to 150	°C
Tj	Max. Operating Junction Temperature	150	°C

June 1998 1/6

THERMAL DATA

R _{thj-case}	Thermal R	Resistance	Junction-Case	Max	1.56	°C/W
R _{thj-amb}	Thermal R	Resistance	Junction-Ambient	Max	62.5	°C/W


ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
I _{CES}	Collector Cut-off Current (V _{BE} = 0)	V _{CE} = 800 V V _{CE} = 800 V T _j = 125 °C			100 500	μA μA
I _{CEO}	Collector Cut-off Current (I _B = 0)	V _{CE} = 450 V			250	μΑ
V _{CEO(sus)}	Collector-Emitter Sustaining Voltage	Ic = 100 mA L = 25 mH	450			V
V_{EBO}	Emitter-Base Voltage (I _C = 0)	I _E = 10 mA	9			V
V _{CE(sat)} *	Collector-Emitter Saturation Voltage	I _C = 1 A I _B = 0.2 A I _C = 2 A I _B = 0.4 A I _C = 3 A I _B = 0.75 A			0.5 0.7 1.1	V V V
$V_{BE(sat)^*}$	Base-Emitter Saturation Voltage	I _C = 1 A I _B = 0.2 A I _C = 2 A I _B = 0.4 A			1.1 1.2	V V
h _{FE} *	DC Current Gain	$I_C = 2 A$ $V_{CE} = 5 V$ Group A Group B $I_C = 10 \text{ mA}$ $V_{CE} = 5 V$	8 13 22 10		23 32	
t _s	INDUCTIVE LOAD Storage Time Fall Time			1 55	1.8 100	μs ns
t _s t _f	INDUCTIVE LOAD Storage Time Fall Time	$\begin{array}{lll} I_{C} = 2 \; A & I_{B1} = 0.4 \; A \\ V_{BE(off)} = \text{-5 V} & R_{BB} = 0 \; \Omega \\ V_{CL} = 250 \; V & L = 200 \; \mu\text{H} \\ T_{j} = 125 \; ^{\circ}\text{C} \end{array}$		1.3 100		μs ns
V _f	Diode Forward Voltage	I _C = 2 A			2.5	V


^{*} Pulsed: Pulse duration = 300 μs, duty cycle 1.5 %

Note: Product will be pre-selected in DC current gain (GROUP A and GROUP B) starting from August'98 datacode. SGS-THOMSON reserves the right to ship either groups according to production availability. Please contact your nearest SGS THOMSON MICROELECTRONICS sales office for delivery details.

Safe Operating Areas

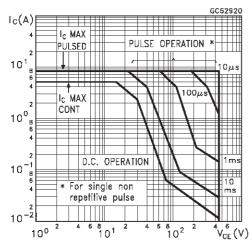


Reverse Biased SOA

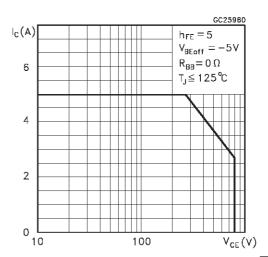


2/6


Derating Curve




DC Current Gain

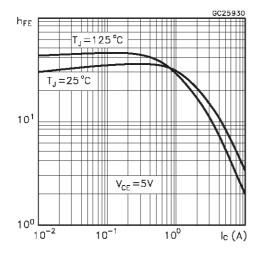


Base Emitter Saturation Voltage

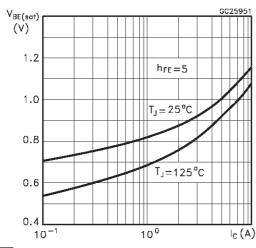


DC Current Gain

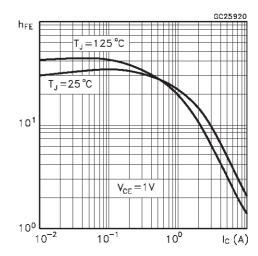

Collector Emitter Saturation Voltage

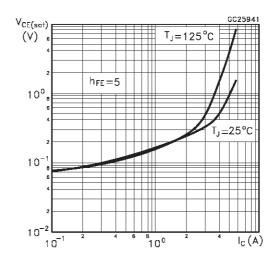


Inductive Storage Time

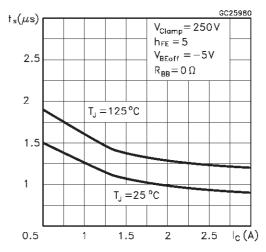


577

Inductive Fall Time

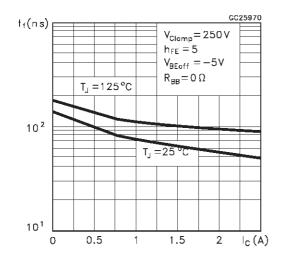

RBSOA and Inductive Load Switching Test Circuit

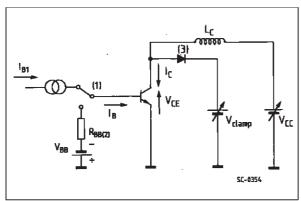


- (1) Fast electronic switch(2) Non-inductive Resistor
- (3) Fast recovery rectifier

4/6

TO-220 MECHANICAL DATA

DIM.	mm			inch			
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Α	4.40		4.60	0.173		0.181	
С	1.23		1.32	0.048		0.051	
D	2.40		2.72	0.094		0.107	
D1		1.27			0.050		
Е	0.49		0.70	0.019		0.027	
F	0.61		0.88	0.024		0.034	
F1	1.14		1.70	0.044		0.067	
F2	1.14		1.70	0.044		0.067	
G	4.95		5.15	0.194		0.203	
G1	2.4		2.7	0.094		0.106	
H2	10.0		10.40	0.393		0.409	
L2		16.4			0.645		
L4	13.0		14.0	0.511		0.551	
L5	2.65		2.95	0.104		0.116	
L6	15.25		15.75	0.600		0.620	
L7	6.2		6.6	0.244		0.260	
L9	3.5		3.93	0.137		0.154	
DIA.	3.75		3.85	0.147		0.151	

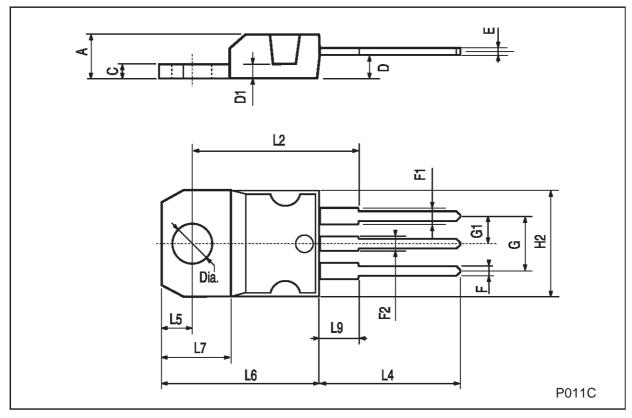

///

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 1998 STMicroelectronics – Printed in Italy – All Rights Reserved STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

6/6