

BAND PASS FILTER


MODEL FNS-200

OPTIMIZED BANDWIDTH


F_c = 200 MHz

SPECIFICATIONS:

Center Frequency:	200 MHz	VSWR:	1.5:1 (Typ)
Passband I. Loss:	2.7 dB (Max)	Input Power	1 Watt (Max)
Passband:	190 - 210 MHz	Impedance:	50 Ohms
35 dB Bandwidth:	95 - 420 MHz	Operating Temp. Range:	-20° to +70° C



MECHANICAL OUTLINE:124S

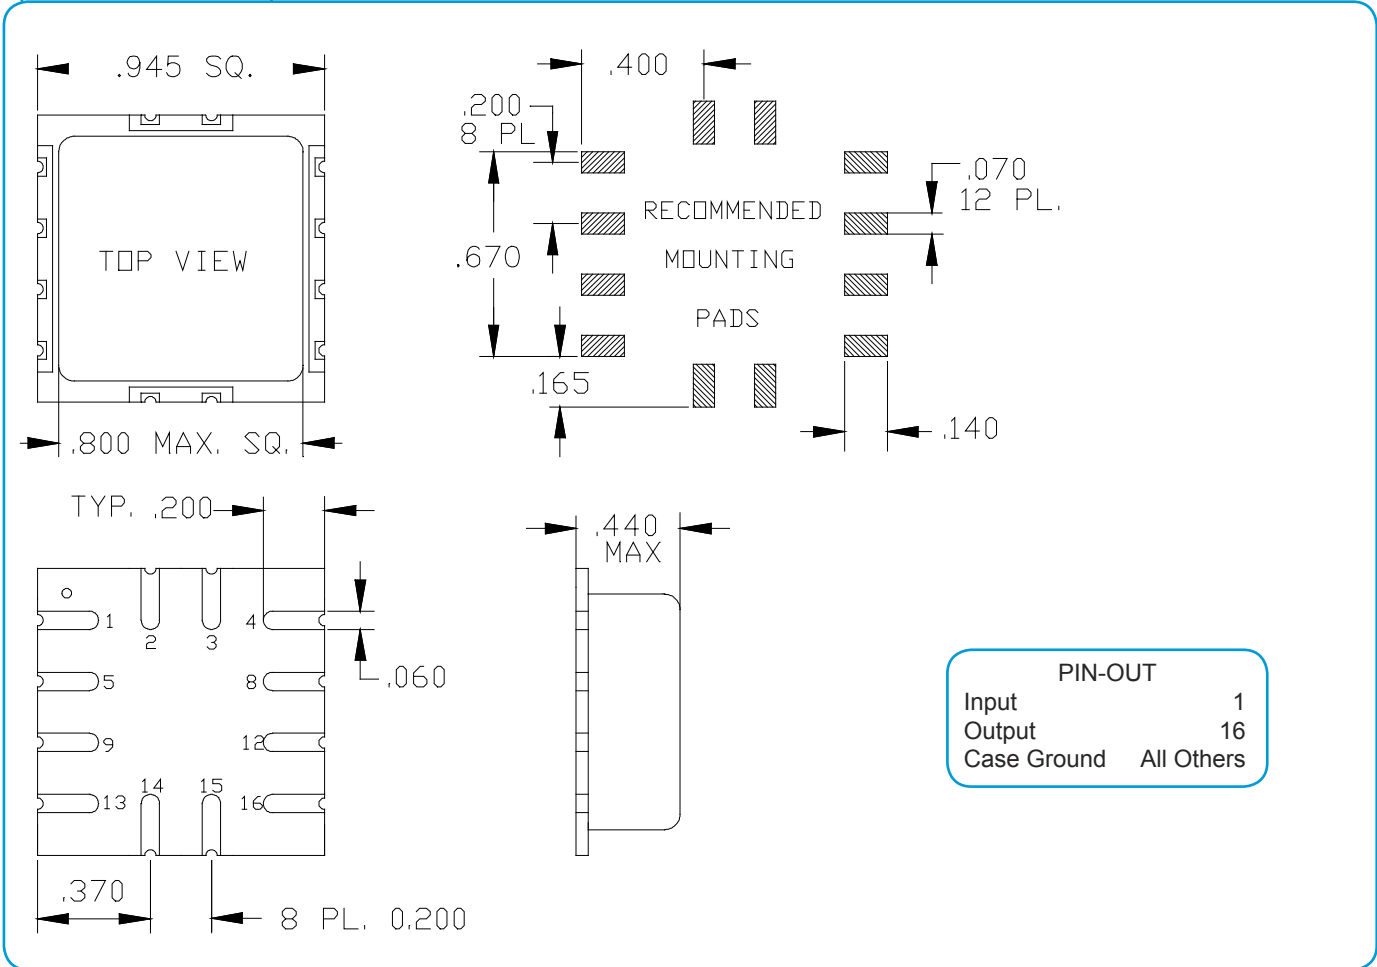

BAND PASS FILTER

MODEL FNS-200

OPTIMIZED BANDWIDTH

$F_c = 200$ MHz

PERFORMANCE PLOTS

