

**DESCRIPTION :****20W 4KVAC Isolation Wide Input AC/DC Converters**

The rated output power of TP20AC series is 20W,With very low no-load consumption (only 60mW), Low leakage current(only 0.1mA),ultra-small size, (50.8*25.4*15.5mm) ,isolated voltage up to 4KVAC. Product safe and reliable,Good EMC performance,EMC And meet the safety specifications of IEC/EN61000-4,CISPR22/EN55022,UL60950/EN60950/EN60601,etc. Widely used in medical, industrial, office and civil industries, if applied to the bad electromagnetic compatibility must refer to the application circuit

FEATURES

| | | |
|-------------------------------|--|---|
| Universal input voltage range | AC and DC dual-use | Wide input voltage: 4:1 |
| Low power consumption | High efficiency,high power density, ultra-small size | Over current protection, Short circuit protection |
| Low Ripple & Noise | RoHS compliant | Operating temperature: -40°C to 70°C |

SELECTION GUIDE

| Part Number | Input | | Output | | Efficiency (typ.) % | |
|---------------|---------------|---------|---------------|-------------|---------------------------|--|
| | Voltage (VAC) | | Voltage (VDC) | Current (A) | | |
| | VAC | VDC | | | | |
| TP20AC220S03W | 85-265 | 120-370 | 3.3 | 3.60 | 80 | |
| TP20AC220S05W | 85-265 | 120-370 | 5 | 3.60 | 80 | |
| TP20AC220S09W | 85-265 | 120-370 | 9 | 2.20 | 82 | |
| TP20AC220S12W | 85-265 | 120-370 | 12 | 1.66 | 83 | |
| TP20AC220S15W | 85-265 | 120-370 | 15 | 1.33 | 83 | |
| TP20AC220S24W | 85-265 | 120-370 | 24 | 0.83 | 83 | |

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

INPUT CHARACTERISTICS

| Parameter | Conditions | Mini. | Typ. | Max. | Units |
|---------------------------------|-------------|---------------------------------|-------|------|-------|
| Voltage range | DC Input | 120 | 220 | 370 | VDC |
| Voltage range | AC Input | 85 | 220 | 265 | VAC |
| Input frequency | | 50 | | 60 | Hz |
| Input Current | 115VAC | | | 210 | mA |
| Input Current | 230VAC | | | 100 | mA |
| Inrush current | 115VAC | | 16 | | A |
| Inrush current | 230VAC | | 30 | | A |
| External fuse recommended value | | 1A/250V, slow fusing, necessary | | | |
| Hot plug | | Unavailable | | | |
| Leakage current | 265VAC/50Hz | | < 0.1 | | mA |

OUTPUT CHARACTERISTICS

| Parameter | Conditions | Mini. | Typ. | Max. | Units |
|--------------------------|--|-------|-------|------|-------|
| Output voltage accuracy | | | | ±2 | % |
| Line regulation | | | | ±1 | % |
| Load regulation | | | | ±1 | % |
| Short-circuit protection | Overvoltage, overcurrent, short circuit protection,self-recovery | | | | |
| Ripple & Noise | 20MHz bandwidth (peak-peak value) | | 50 | 120 | mv |
| Temperature Coefficient | | | ±0.03 | | %/°C |
| Start rising time | 115VAC Input while full-load | | 200 | | ms |
| Start rising time | 230VAC Input while full-load | | 100 | | ms |
| Output hold time | 115VAC Input while full-load | | 15 | | ms |
| Output hold time | 230VAC Input while full-load | | 40 | | ms |

TEMPERATURE CHARACTERISTICS

| Parameter | Conditions | Mini. | Typ. | Max. | Units |
|-----------------------|---|-------|------|------|-----------|
| Isolation voltage | Tested for 1 min. | 4000 | | | VAC |
| Operating Temperature | According to the output load derating curve | -40 | | +70 | °C |
| Storage Temperature | | -40 | | +85 | °C |
| Storage Humidity | | 10 | | 95 | % .RH max |


SAFETY & ELECTROMAGNETIC COMPATIBILITY

| | |
|--------------------------------|--|
| Safe standard | EN60950, EN60601, UL60950, |
| Isolated voltage | I/P-O/P:4000VAC |
| Isolation resistance | I/P-O/P>100M Ohms/500VDC 25°C 70% RH |
| Conduction and radiation | EN55011, EN55022 (CISPR22) CLASS B |
| Electrostatic discharge(ESD) | IEC/EN 61000-4-2 level 4 8kV/15kV |
| Rf radiation immunity (RF) | IEC/EN 61000-4-3 |
| EFT | IEC/EN 61000-4-4 level 4 4kV (Note: see application circuit for details) |
| Surge | IEC/EN 61000-4-5 level 4 2kV (Note: see application circuit for details) |
| MTBF | 200K hrs min. MIL-HDBK-217F(25) |


NOTES

- The above data, except for special instructions, are measured at TA = 25°C, humidity <75%, input nominal voltage 230Vac and output rated load
- Ripple and noise are measured according to the application circuit of this manual, using a 300mm twisted pair and in the case of a bandwidth of 20MHz
- The parts in the system is considered as a component, need to combine the terminal equipment for electromagnetic compatibility related confirmation.


PRODUCT SCHEMATIC

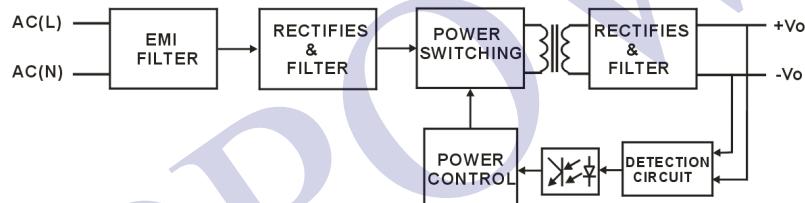

DERATING CURVE

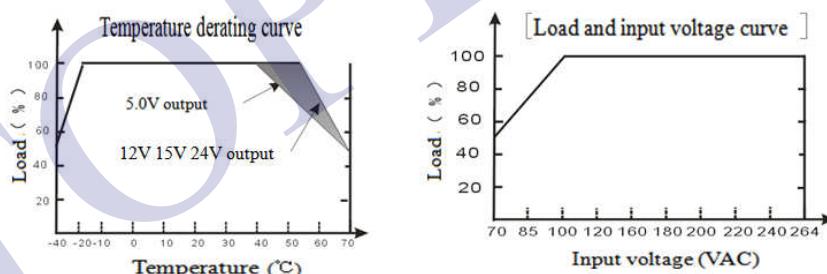

TYPICAL APPLICATION CIRCUIT

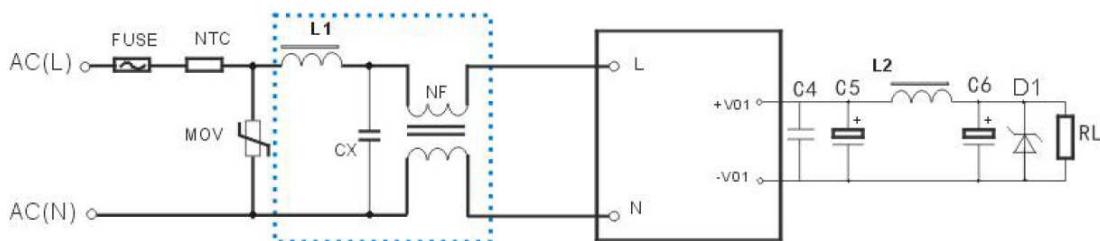

NOTES:


1. The output filter capacitance C5/C6 is the electrolytic capacitor. It is recommended to use the high frequency low resistance electrolytic capacitance, the capacity and the current of the flow; Please refer to the technical specifications provided by the manufacturers. The C4 is to remove the high frequency noise.
2. The dashed box is an EMC filter that is accessible for higher EMC requirements, which can be omitted while general applications
3. We have formed a filter for L1, CX and NF, for the customer to use, the model is FA01.

TYPICAL APPLICATION CIRCUIT

| Component PN | FUSE | NTC | NF | L1 | MOV | CX | L2 | C5/C6 | C4 | D1 |
|-----------------|--------------|---|--|-----------|--|--|----------|------------|------------------------------|----------|
| TP20AC220S03W | T2A /250V | Recommended external NTC thermistor, model: 10d-9 | NF is common mode inductance, inductance value in 30mH, current 0.5 A. | 1mH/ 0.8A | MOV is the voltage resistance and the recommended value is 14D471K | CX is the safety X capacitive, 104K / 275V | 10uH/ 3A | 2200uF/16V | 104K/50 (Ceramic capacitors) | P6KE6.8A |
| TP20AC220S05W | | | | | | | | 2200uF/16V | | P6KE6.8A |
| TP20AC220S09W | | | | | | | | 1000uF/16V | | P6KE16A |
| TP20AC220S12W | | | | | | | | 680uF/16V | | P6KE16A |
| TP20AC220S15W | | | | | | | | 470uF/25V | | P6KE20A |
| TP20AC220S24W | | | | | | | | 220uF/35V | | P6KE33A |

MECHANICAL DIMENSIONS

DIP packaging

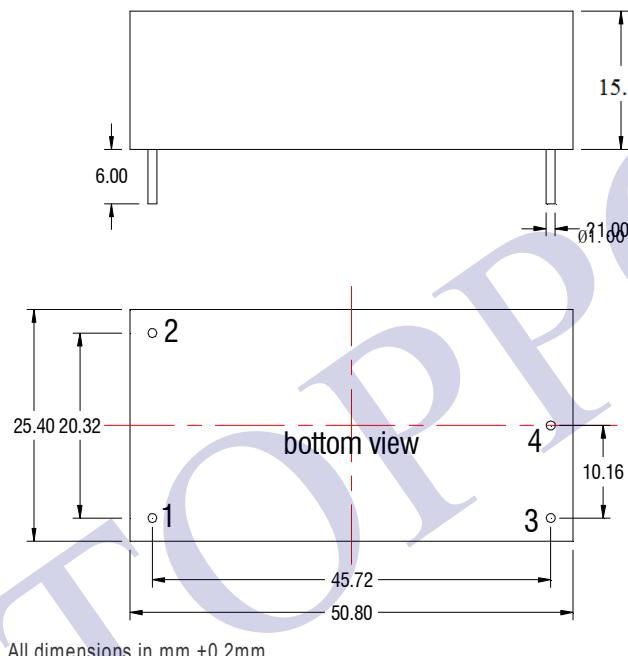

| PIN | Single |
|-----|--------|
| 1 | N |
| 2 | L |
| 3 | +VO |
| 4 | -VO |

SELECTION GUIDE

