

QUICKSWITCH[®] PRODUCTS 2.5V / 3.3V 10-BIT HIGH BANDWIDTH BUS SWITCH


FEATURES:

- N channel FET switches with no parasitic diode to Vcc
 - Isolation under power-off conditions
 - No DC path to Vcc or GND
 - 5V tolerant in OFF and ON state
- 5V tolerant I/Os
- Low Ron 4Ω typical
- · Flat Row characteristics over operating range
- Rail-to-rail switching 0 5V
- Bidirectional dataflow with near-zero delay: no added ground bounce
- Excellent Row matching between channels
- Vcc operation: 2.3V to 3.6V
- · High bandwidth up to 500MHz
- · LVTTL-compatible control Inputs
- · Undershoot Clamp Diodes on all switch and control Inputs
- · Low I/O capacitance, 4pF typical
- Available in QSOP and TSSOP packages

APPLICATIONS:

- · Hot-swapping
- 10/100 Base-T, Ethernet LAN switch
- Low distortion analog switch
- Replaces mechanical relay
- ATM 25/155 switching

FUNCTIONAL BLOCK DIAGRAM



The IDT logo is a registered trademark of Integrated Device Technology, Inc.

DESCRIPTION:

The QS3VH384 HotSwitch is a high bandwidth, 10-bit bus switch. The QS3VH384 has very low ON resistance, resulting in under 250ps propagation delay through the switch. Two banks of five switches are controlled by independent (\overline{xOE}), LVTTL compatible signals for bidirectional data flow with no added delay or ground bounce. In the ON state, the switch can pass signals up to 5V. In the OFF state, the switches offer very high impedence at the terminals.

The combination of near-zero propagation delay, high OFF impedance, and over-voltage tolerance makes the QS3VH384 ideal for high performance communications applications.


The QS3VH384 is characterized for operation from -40°C to +85°C.

1

AUGUST 2002

INDUSTRIAL TEMPERATURE RANGE

PINCONFIGURATION



QSOP/ TSSOP TOP VIEW

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

Symbol	Description	Max	Unit
VTERM ⁽²⁾	SupplyVoltage to Ground	-0.5 to +4.6	V
VTERM ⁽³⁾	DC Switch Voltage Vs	-0.5 to +5.5	V
VTERM ⁽³⁾	DC Input Voltage VIN	-0.5 to +5.5	V
VAC	AC Input Voltage (pulse width ≤20ns)	-3	V
Ιουτ	DC Output Current (max. sink current/pin)	120	mA
Tstg	Storage Temperature	-65 to +150	°C

NOTES:

 Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

2. Vcc terminals.

3. All terminals except $V\mbox{cc}$.

CAPACITANCE (TA = +25°C, F = 1MHz, VIN = 0V, VOUT = 0V)

Symbol	Parameter ⁽¹⁾	Тур.	Max.	Unit
CIN	Control Inputs	3	5	pF
CI/O	Quickswitch Channels (Switch OFF)	4	6	pF
Cı/o	Quickswitch Channels (Switch ON)	8	12	pF

NOTE:

1. This parameter is guaranteed but not production tested.

PINDESCRIPTION

Pin Names	I/O	Description
A0 - A9	I/O	Bus A
B0 - B9	I/O	Bus B
10E, 20E	I	Output Enable

FUNCTION TABLE⁽¹⁾

10E	20E	B0 - B4	B5 - B9	Function
Н	Н	Z	Z	Disconnect
L	Н	A0 - A4	Z	Connect
Н	L	Z	A5 - A9	Connect
L	L	A0 - A4	A5 - A9	Connect

NOTE:

1. H = HIGH Voltage Level

L = LOW Voltage Level

Z = High-Impedence

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

 ${\it Following \, Conditions \, Apply \, Unless \, Otherwise \, Specified:}$


Industrial: TA = -40° C to $+85^{\circ}$ C, VCC = 3.3V ± 0.3 V

Symbol	Parameter	Test C	Conditions		Min.	Тур. ⁽¹⁾	Max.	Unit
Vih	Input HIGH Voltage	Guaranteed Logic HIGH	Vcc = 2.3V to 2.7	V	1.7	_	_	V
		for Control Inputs	Vcc = 2.7V to 3.6	V	2	_	_	
VIL	Input LOW Voltage	Guaranteed Logic LOW	Vcc = 2.3V to 2.7	V	_	_	0.7	V
		for Control Inputs	Vcc = 2.7V to 3.6	V	—	_	0.8	
lin	Input Leakage Current (Control Inputs)	$0V \le VIN \le VCC$		—	—	±1	μA	
loz	Off-State Current (Hi-Z)	$0V \le VOUT \le 5V$, Switches OFF		—	—	±1	μA	
IOFF	Data Input/Output Power Off Leakage	VIN or VOUT OV to 5V, VCC = 0V		—	—	±1	μA	
		Vcc = 2.3V	VIN = 0V	Ion = 30mA	_	6	8	
Ron	Switch ON Resistance	Typical at Vcc = 2.5V	VIN = 1.7V	Ion = 15mA	_	7	9	Ω
		Vcc = 3V	VIN = 0V	Ion = 30mA	—	4	6	
			VIN = 2.4V	Ion = 15mA	-	5	8	

NOTE:

1. Typical values are at Vcc = 3.3V and TA = 25°C.

TYPICAL ON RESISTANCE vs VIN AT VCC = 3.3V

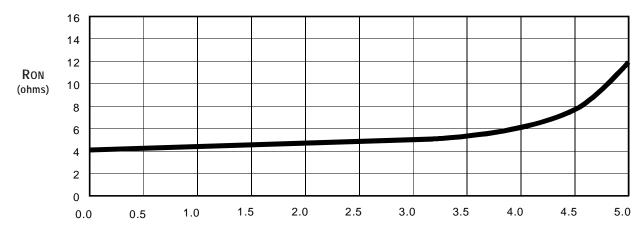

VIN (Volts)

POWER SUPPLY CHARACTERISTICS

Symbol	Parameter	Test Conditions ⁽¹⁾	Min.	Тур.	Max.	Unit
lcco	Quiescent Power Supply Current	Vcc = Max., VIN = GND or Vcc, f = 0	_	1	4	mA
Δlcc	Power Supply Current ^(2,3) per Input HIGH	Vcc = Max., VIN = 3V, f = 0 per Control Input	_	_	30	μA
ICCD	Dynamic Power Supply Current ⁽⁴⁾	Vcc = 3.3V, A and B Pins Open, Control Inputs	See Typical	ICCD vs Enabl	e Frequency	graph below
		Toggling @ 50% Duty Cycle				

NOTES:


1. For conditions shown as Min. or Max., use the appropriate values specified under DC Electrical Characteristics.

2. Per input driven at the specified level. A and B pins do not contribute to Δ Icc.

3. This parameter is guaranteed but not tested.

4. This parameter represents the current required to switch internal capacitance at the specified frequency. The A and B inputs do not contribute to the Dynamic Power Supply Current. This parameter is guaranteed but not production tested.

TYPICAL ICCD VS ENABLE FREQUENCY CURVE AT VCC = 3.3V

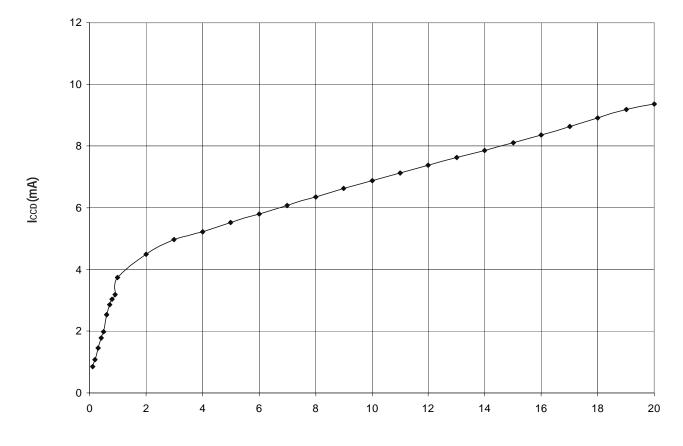

ENABLE FREQUENCY (MHz)

SWITCHING CHARACTERISTICS OVER OPERATING RANGE

 $T_A = -40^{\circ}C \text{ to } +85^{\circ}C$

		$V_{CC} = 2.5 \pm 0.2 V^{(1)}$		$Vcc = 3.3 \pm 0.3 V^{(1)}$		
Symbol	Parameter	Min. ⁽⁴⁾	Max.	Min. ⁽⁴⁾	Max.	Unit
t PLH	Data Propagation Delay ^(2,3)		0.2	—	0.2	ns
t PHL	Ax to/from Bx					
tPZL	Switch Turn-On Delay	1.5	7.5	1.5	7.5	ns
tрzн	xOE to Ax/Bx					
tPLZ	Switch Turn-Off Delay	1.5	7	1.5	7	ns
t PHZ	xOE to Ax/Bx					
fxOE	Operating Frequency-Enable ^(2,5)		10		20	MHz

NOTES:

1. See Test Conditions under TEST CIRCUITS AND WAVEFORMS.


2. This parameter is guaranteed but not production tested.

3. The bus switch contributes no propagation delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.2ns at CL = 50pF. Since this time constant is much smaller than the rise and fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch, when used in a system, is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.


4. Minimums are guaranteed but not production tested.

5. Maximum toggle frequency for \overline{xOE} control input (pass voltage > Vcc, VIN = 5V, RLOAD $\ge 1M\Omega$, no CLOAD).


SOME APPLICATIONS FOR HOTSWITCH PRODUCTS

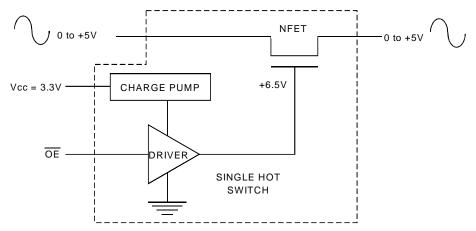

Rail-to-Rail Switching

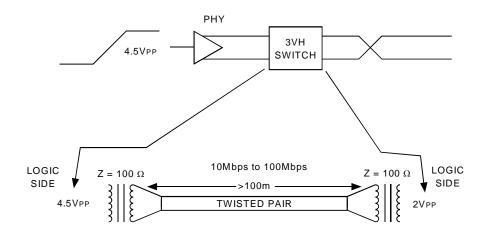

Fast Ethernet Data Switching (LAN Switch)

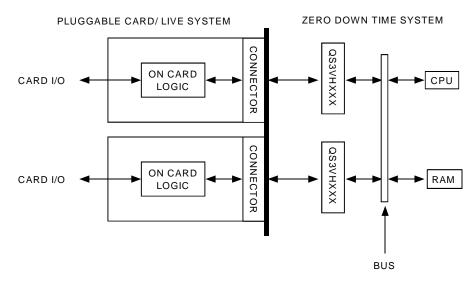


Hot-Swapping

TEST CIRCUITS AND WAVEFORMS

TESTCONDITIONS

Symbol	$VCC^{(1)}= 3.3V \pm 0.3V$	$VCC^{(2)} = 2.5V \pm 0.2V$	Unit
Vload	6	2 x Vcc	V
Vih	3	Vcc	V
VT	1.5	Vcc/2	V
Vlz	300	150	mV
Vhz	300	150	mV
CL	50	30	pF

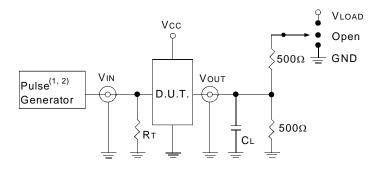

Test Circuits for All Outputs

DEFINITIONS:

CL = Load capacitance: includes jig and probe capacitance.

RT = Termination resistance: should be equal to ZouT of the Pulse Generator.


NOTES:

1. Pulse Generator for All Pulses: Rate \leq 10MHz; tr \leq 2.5ns; tr \leq 2.5ns.


2. Pulse Generator for All Pulses: Rate \leq 10MHz; tr \leq 2ns; tr \leq 2ns.

SWITCH POSITION

Test	Switch
tplz/tpzl	Vload
tрнz/tpzн	GND
tPD	Open



Propagation Delay



NOTE:

1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

Enable and Disable Times

IDTQS3VH384 INDUSTRIAL TEMPERATURE RANGE ORDERING INFORMATION IDTQS IDTQS XXXXX Device Type Package

 Q
 Quarter Size Outline Package

 PA
 Thin Shrink Small Outline Package

 PAG
 TSSOP - Green

 3VH384
 2.5V/3.3V 10-Bit High Bandwidth Bus Switch

DATA SHEET DOCUMENT HISTORY

8/6/2002 Updated according to PCN Logic-0206-11



CORPORATE HEADQUARTERS 2975 Stender Way Santa Clara, CA 95054 *for SALES:* 800-345-7015 or 408-727-6116 fax: 408-492-8674 www.idt.com

for Tech Support: logichelp@idt.com (408) 654-6459