

# STW26NM60

# N-CHANNEL 600V - 0.125Ω - 30A TO-247 MDmesh™ MOSFET

**Table 1: General Features** 

TYPE	V <sub>DSS</sub>	R <sub>DS(on)</sub>	I <sub>D</sub>
STW26NM60	600 V	< 0.135 Ω	30 A

- TYPICAL  $R_{DS}(on) = 0.125 \Omega$
- HIGH dv/dt AND AVALANCHE CAPABILITIES
- IMPROVED ESD CAPABILITY
- LOW INPUT CAPACITANCE AND GATE CHARGE
- LOW GATE INPUT RESISTANCE

#### **DESCRIPTION**

The MDmesh™ is a new revolutionary MOSFET technology that associates the Multiple Drain process with the Company's PowerMESH™ horizontal layout. The resulting product has an outstanding low on-resistance, impressively high dv/dt and excellent avalanche characteristics. The adoption of the Company's proprietary strip technique yields overall dynamic performance that is significantly better than that of similar competition's products.

### **APPLICATIONS**

The MDmesh<sup>™</sup> family is very suitable for increasing power density of high voltage converters allowing system miniaturization and higher efficiencies.

Figure 1: Package





Figure 2: Internal Schematic Diagram



**Table 2: Order Codes** 

SALES TYPE	MARKING	PACKAGE	PACKAGING
STW26NM60	W26NM60	TO-247	TUBE

February 2005 1/9

**Table 3: Absolute Maximum ratings** 

Symbol	Parameter	Value	Unit
V <sub>DS</sub>	Drain-source Voltage (V <sub>GS</sub> = 0)	600	V
V <sub>DGR</sub>	Drain-gate Voltage (R <sub>GS</sub> = 20 k $\Omega$ )	600	V
V <sub>GS</sub>	Gate- source Voltage	± 30	V
I <sub>D</sub>	Drain Current (continuous) at T <sub>C</sub> = 25°C	30	А
I <sub>D</sub>	Drain Current (continuous) at T <sub>C</sub> = 100°C	18.9	А
I <sub>DM</sub> (•)	Drain Current (pulsed)	120	А
P <sub>TOT</sub>	Total Dissipation at T <sub>C</sub> = 25°C	313	W
	Derating Factor	2.5	W/°C
V <sub>ESD(G-S)</sub>	Gate source ESD(HBM-C=100pF, R=1.5KΩ)	6000	V
dv/dt (1)	Peak Diode Recovery voltage slope	15	V/ns
T <sub>j</sub> T <sub>stg</sub>	Operating Junction Temperature Storage Temperature	-55 to 150	°C

<sup>(•)</sup> Pulse width limited by safe operating area

**Table 4: Thermal Data** 

Rthj-case	Thermal Resistance Junction-case Max	0.4	°C/W
Rthj-amb	Thermal Resistance Junction-ambient Max	62.5	°C/W
T <sub>I</sub>	Maximum Lead Temperature For Soldering Purpose	300	°C

**Table 5: Avalanche Characteristics** 

Symbol	Parameter	Max Value	Unit
I <sub>AR</sub>	Avalanche Current, Repetitive or Not-Repetitive (pulse width limited by T <sub>j</sub> max)	13	Α
E <sub>AS</sub>	Single Pulse Avalanche Energy (starting $T_j = 25$ °C, $I_D = I_{AR}$ , $V_{DD} = 50$ V)	740	mJ

## **ELECTRICAL CHARACTERISTICS** (T<sub>CASE</sub> =25°C UNLESS OTHERWISE SPECIFIED)

**Table 6: Gate-Source Zener Diode** 

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
BV <sub>GSO</sub>	Gate-Source Breakdown Voltage	Igss=± 1mA (Open Drain)	30			V

#### PROTECTION FEATURES OF GATE-TO-SOURCE ZENER DIODES

The built-in back-to-back Zener diodes have specifically been designed to enhance not only the device's ESD capability, but also to make them safely absorb possible voltage transients that may occasionally be applied from gate to source. In this respect the Zener voltage is appropriate to achieve an efficient and cost-effective intervention to protect the device's integrity. These integrated Zener diodes thus avoid the usage of external components.

2/9

<sup>(1)</sup>  $I_{SD} \leq 26A$ ,  $di/dt \leq 200A/\mu s$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  $T_i \leq T_{JMAX}$ .

Table 7: On /Off

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
V <sub>(BR)DSS</sub>	Drain-source Breakdown Voltage	$I_D = 250 \mu\text{A},  V_{GS} = 0$	600			٧
I <sub>DSS</sub>	Zero Gate Voltage Drain Current (V <sub>GS</sub> = 0)	V <sub>DS</sub> = Max Rating V <sub>DS</sub> = Max Rating, T <sub>C</sub> = 125°C			10 100	μA μA
I <sub>GSS</sub>	Gate-body Leakage Current (V <sub>DS</sub> = 0)	V <sub>GS</sub> = ± 20 V			± 10	μA
V <sub>GS(th)</sub>	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_{D} = 250 \mu\text{A}$	3	4	5	V
R <sub>DS(on</sub>	Static Drain-source On Resistance	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 13 A		0.125	0.135	Ω

## **Table 8: Dynamic**


Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
g <sub>fs</sub> (1)	Forward Transconductance	V <sub>DS</sub> = 15 V , I <sub>D</sub> = 13 A		20		S
C <sub>iss</sub> C <sub>oss</sub> C <sub>rss</sub>	Input Capacitance Output Capacitance Reverse Transfer Capacitance	V <sub>DS</sub> = 25 V, f = 1 MHz, V <sub>GS</sub> = 0		2900 900 40		pF pF pF
C <sub>OSS eq</sub> (3).	Equivalent Output Capacitance	$V_{GS} = 0 \text{ V}, V_{DS} = 0 \text{ to } 400 \text{ V}$		300		pF
t <sub>d(on)</sub> t <sub>r</sub> t <sub>d(off)</sub> t <sub>f</sub>	Turn-on Delay Time Rise Time Turn-off-Delay Time Fall Time	$V_{DD} = 300 \text{ V, } I_{D} = 13 \text{ A,}$ $R_{G} = 4.7 \Omega, V_{GS} = 10 \text{ V}$ (see Figure 15)		35 22 14 20		ns ns ns ns
Q <sub>g</sub> Q <sub>gs</sub> Q <sub>gd</sub>	Total Gate Charge Gate-Source Charge Gate-Drain Charge	$V_{DD} = 480 \text{ V}, I_{D} = 26 \text{ A},$ $V_{GS} = 10 \text{ V}$ (see Figure 18)		73 20 37	102	nC nC nC

## **Table 9: Source Drain Diode**

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
I <sub>SD</sub> I <sub>SDM</sub> (2)	Source-drain Current Source-drain Current (pulsed)				26 104	A A
V <sub>SD</sub> (1)	Forward On Voltage	$I_{SD} = 26 \text{ A}, V_{GS} = 0$			1.5	V
t <sub>rr</sub> Q <sub>rr</sub> I <sub>RRM</sub>	Reverse Recovery Time Reverse Recovery Charge Reverse Recovery Current	$I_{SD} = 26 \text{ A, di/dt} = 100 \text{ A/}\mu\text{s}$ $V_{DD} = 100 \text{V}$ (see Figure 16)		450 7 30.5		ns µC A
t <sub>rr</sub> Q <sub>rr</sub> I <sub>RRM</sub>	Reverse Recovery Time Reverse Recovery Charge Reverse Recovery Current	$I_{SD} = 26 \text{ A, di/dt} = 100 \text{ A/µs}$ $V_{DD} = 100 \text{V, T}_j = 150 ^{\circ}\text{C}$ (see Figure 16)		560 9 32.5		ns µC A

<sup>(1)</sup> Pulsed: Pulse duration = 300 µs, duty cycle 1.5 %.
(2) Pulse width limited by safe operating area.
(3) Coss eq. is defined as a constant equivalent capacitance giving the same charging time as Coss when VDs increases from 0 to 80% VDss.

Figure 3: Safe Operating Area



**Figure 4: Output Characteristics** 




Figure 5: Transconductance




Figure 6: Thermal Impedance




Figure 7: Transfer Characteristics





Figure 8: Static Drain-source On Resistance



47/

Figure 9: Gate Charge vs Gate-source Voltage




Figure 10: Normalized Gate Thereshold Voltage vs Temperature




Figure 11: Dource-Drain Diode Forward Characteristics




Figure 12: Capacitance Variations




Figure 13: Normalized On Resistance vs Temperature




Figure 14: Unclamped Inductive Load Test Circuit




Figure 15: Switching Times Test Circuit For Resistive Load




Figure 16: Test Circuit For Inductive Load Switching and Diode Recovery Times




Figure 17: Unclamped Inductive Wafeform






Figure 18: Gate Charge Test Circuit



**477**.

# **TO-247 MECHANICAL DATA**

DIM.		mm.			inch	
DIWI.	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
Α	4.85		5.15	0.19		0.20
A1	2.20		2.60	0.086		0.102
b	1.0		1.40	0.039		0.055
b1	2.0		2.40	0.079		0.094
b2	3.0		3.40	0.118		0.134
С	0.40		0.80	0.015		0.03
D	19.85		20.15	0.781		0.793
E	15.45		15.75	0.608		0.620
е		5.45			0.214	
L	14.20		14.80	0.560		0.582
L1	3.70		4.30	0.14		0.17
L2		18.50			0.728	
øΡ	3.55		3.65	0.140		0.143
øR	4.50		5.50	0.177		0.216
S		5.50			0.216	

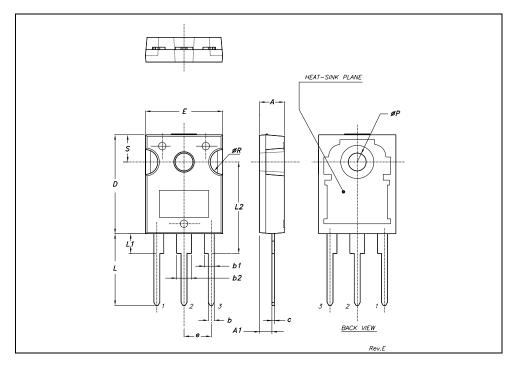

# **Table 10: Revision History**

Date	Revision	Description of Changes		
24-June-2004	4	New Stylesheet. No Content Change		
04-Feb-2004	5	New Id current on title in first page		

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics
All other names are the property of their respective owners

© 2005 STMicroelectronics - All Rights Reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

