




Description

- Extremely low collector-to-emitter saturation voltage ($V_{CE(SAT)}$ =0.2V Typ. @I_C/I_B=3A/150 mA)
- Suitable for low voltage large current drivers
- Excellent h_{FE} Linearity
- Complementary pair with DP500F
- Switching Application

Ordering Information

Type NO.	Marking	Package Code		
DN500F	N5	SOT-89		

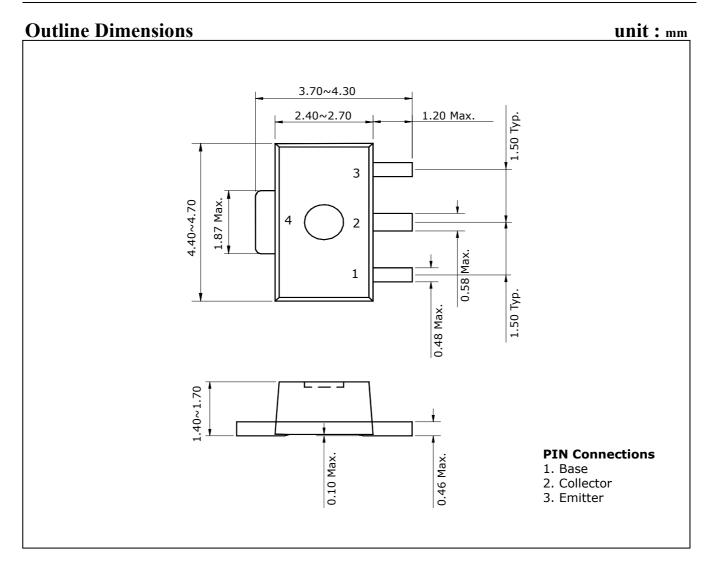

KST-8012-003

Absolute maximum ratings

(Ta=25°C)

Characteristic	Symbol	Ratings	Unit	
Collector-Base voltage	V_{CBO}	15	V	
Collector-Emitter voltage	V_{CEO}	12	V	
Emitter-Base voltage	V_{EBO}	5	V	
Collector current	I_{C}	5	Α	
Collector power dissipation	P _C	0.5	W	
Collector power dissipation	P _C *	2		
Junction temperature	Tı	150	°C	
Storage temperature	T_{stg}	-55~150	°C	

^{* :} When mounted on $40\times40\times0.8$ mm ceramic substate

Electrical Characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base breakdown voltage	BV _{CBO}	$I_C=50 \mu$ A, $I_E=0$	15	1	ı	V
Collector-Emitter breakdown voltage	BV _{CEO}	$I_C=1$ mA, $I_B=0$	12	1	ı	V
Emitter-Base breakdown voltage	BV_{EBO}	$I_E=50 \mu A, I_C=0$	5	1	ı	V
Collector cut-off current	I_{CBO}	$V_{CB} = 15V$, $I_{E} = 0$	-	ı	0.1	μA
Emitter cut-off current	I_{EBO}	V_{EB} =4V, I_C =0	-	1	0.1	μA
DC current gain	h _{FE1}	V_{CE} =1V, I_{C} =100 mA	120	1	700	ı
	h _{FE2}	$V_{CE}=1V$, $I_{C}=3A$	40	ı	ı	ı
Collector-Emitter on voltage	$V_{CE(sat1)}$	I_C =3A, I_B =150 $^{\text{mA}}$	-	1	0.3	V
Base-Emitter on voltage	$V_{BE(sat)}$	I_C =3A, I_B =150 $^{\text{mA}}$	-	1	1.2	V
Transition frequency	f_T	V_{CB} =5V, I_{C} =500 mA	-	150	1	MHz
Collector output capacitance	C _{ob}	V_{CB} =10V, I_{E} =0, f=1 MHz	-	-	50	рF

KST-8012-003 2

Electrical Characteristic Curves

Fig. 1 Pc - Ta

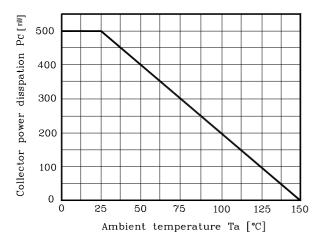


Fig. 3 h_{FE} - I_C

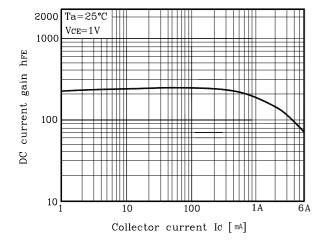


Fig. 2 Ic - V_{BE}


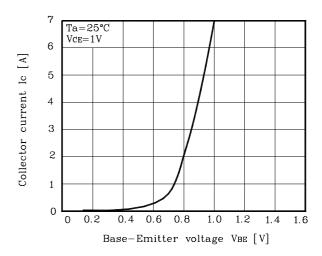


Fig. 4 $V_{CE(sat)}$ - I_C

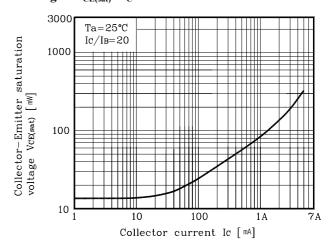

KST-8012-003 3

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.

KST-8012-003 4