

# Features/Benefits

- Multi-pole and multi-positions
- Panel and PCB mounting
- Stainless steel actuator
- Non-shorting contacts

# **Typical Applications**

- Test equipment
- Industrial equipment
- Medical equipment



# Specifications

### **Materials**

- CONTACT RATING: Q contact material: Carry-6 AMPS continuous. Switch-250 mA max. @ 125 V AC or 28 DC. Non-shorting contacts standard. See page L-15 for additional ratings.
  ELECTRICAL LIFE: 10,000 make-and-break cycles at 150 mA,
- 125 V AC or 28 DC. CONTACT RESISTANCE: Below 20 m $\Omega$  typ. initial @

2-4 V DC, 100 mA, for both silver and gold plated contacts. INSULATION RESISTANCE:  $10^{10} \Omega$  min.

DIELECTRIC STRENGTH: 600 Vrms min. @ sea level.

OPERATING & STORAGE TEMPERATURE: -30°C to 85°C.

OPERATING TORQUE: 4-7 ounces-inches typ. initial.

SOLDERABILITY: Per MIL-STD-202F method 208D, or

EIA RS-186E method 9 (1 hour steam aging).

**NOTE:** Any models supplied with Q or G contact material are RoHS compliant. For the latest information regarding RoHS compliance, please go to: www.ittcannon.com/rohs. **NOTE:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

HOUSING AND BUSHING: Zinc alloy, bright zinc plated, with clear chromate finish.

ACTUATOR: Zinc alloy, nickel plated or stainless steel.

BASE: Diallylphthalate (DAP) or melamine phenolic, with insert molded terminals.

ROTOR: Glass filled polyester (UL 94V-0).

MOVABLE CONTACTS:

Non-shorting: Q contact material: Copper alloy, silver plated. See page L-15 for additional contact materials.

STATIONARY CONTACT & ALL TERMINALS: Q contact material: Copper alloy, silver plated. All terminals insert molded. All terminals present regardless of number of switch positions. See page L-15 for additional contact materials.

CONTACT SPRING: Music wire, phosphate coated.

STOP PIN: Stainless steel.


STOP RING: Brass.

HARDWARE: Nut: Brass, nickel plated; Lockwasher: Steel, nickel plated.

# **Build-A-Switch**

Rotary

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages L-13 thru L-17. For additional options not shown in catalog, consult Customer Service Center.

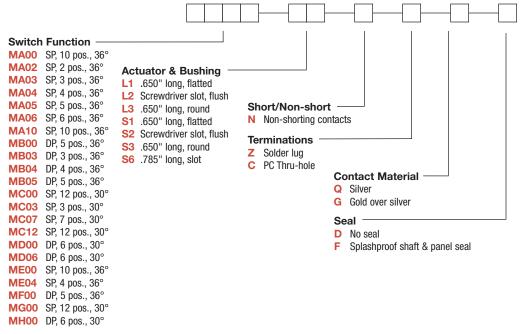

L-12

#### SWITCH FUNCTION

SP MODELS 36° INDEXING SCHEMATIC

12345678910

**DP MODELS 36° INDEXING** SCHEMATIC B

30° INDEXING								
NO. POLES	MODEL NO. WITH STOP PINS	MODEL NO. WITH STOP RINGS	SWITCH FUNCTION					
	MC00	MG00	12 Positions No Stops					
SP	MC03	-	3 Positions					
	MC07	-	7 Positions					
	MC12	- 12 Positions						
DP	MD00	MH00	6 Positions No Stops					
	MD06	_	6 Positions					


36° INDEXING						
NO. POLES	MODEL NO. WITH STOP PINS	MODEL NO. WITH STOP RINGS	SWITCH FUNCTION			
SP	MA00	ME00	10 Positions No Stops			
	MA02	-	2 Positions			
	MA03	—	3 Positions			
	MA04	<b>ME04</b>	4 Positions			
	MA05	—	5 Positions			
	MA06	—	6 Positions			
	MA10	—	10 Positions			
DP	MB00	MF00	5 Positions No Stops			
	MB03		3 Positions			
	MB04	_	4 Positions			
	MB05	—	5 Positions			

SP MODELS 30° INDEXING SCHEMATIC

23 456 789 10




**DP MODELS 30° INDEXING** SCHEMATIC




All models , All 🚳 with all options when ordered with S1-SB stainless steel actuator options.

NOTE: Number of positions or stops preset at factory (NOTE: MX00 models have full 360 rotation with no stops. Stop pins or stop rings supplied for user-selectable stops, see above). All terminals present regardless of number of switch positions. Hardware is available separately, see section "Technical Data and Additional Hardware".

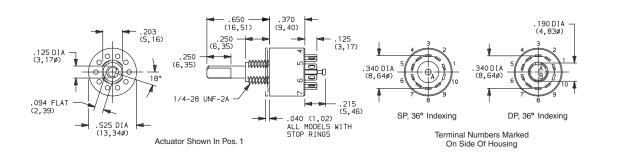


Part number shown: MA00L1NZQD

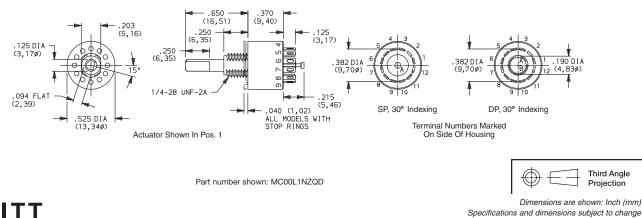

Specifications and dimensions subject to change

L


Rotary

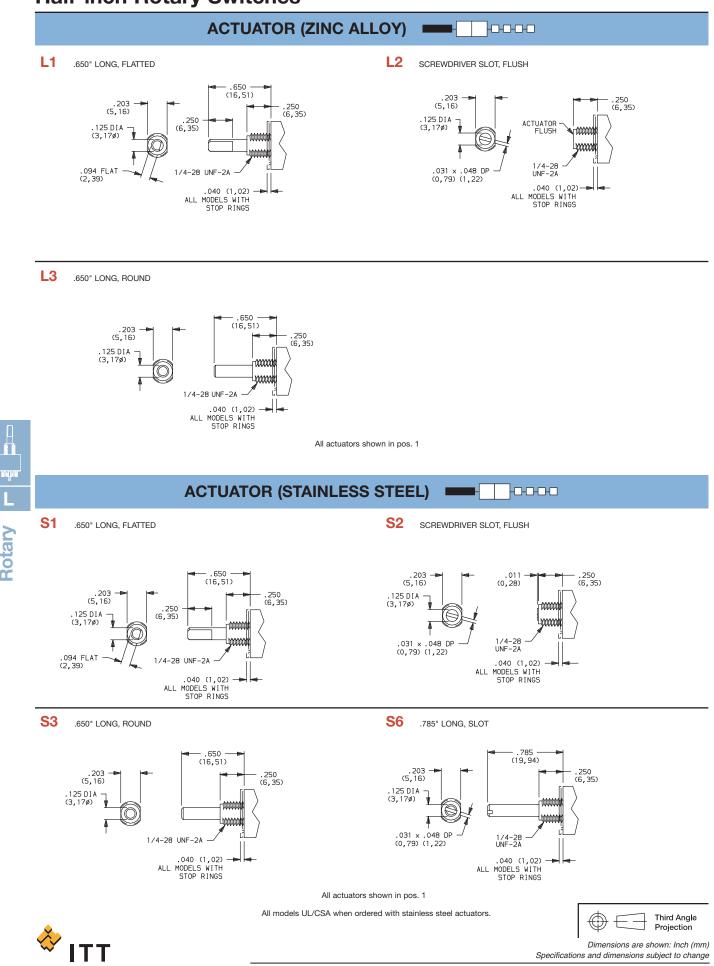

# SHORTING/NON-SHORTING CONTACTS

#### Ν NON-SHORTING CONTACTS

Break-before-make

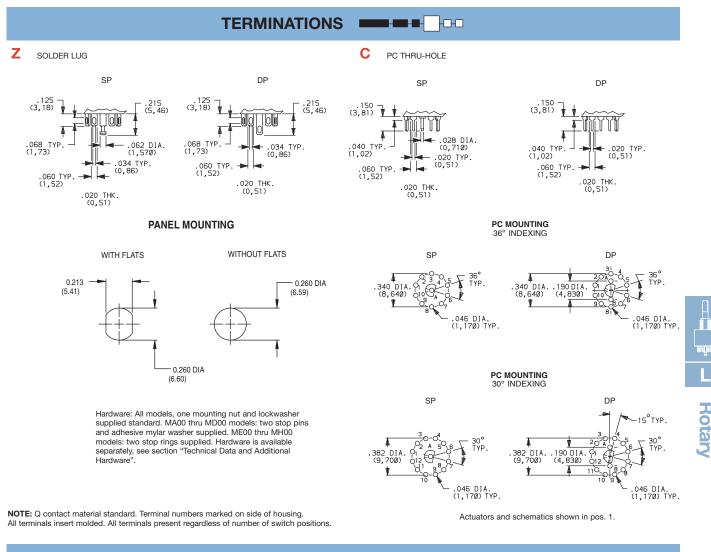

#### CONTACT MATERIAL -

OPTION CODE	RoHS COMPLIANT*	RoHS COMPATIBLE*	CONTACT MATERIAL	TERMINAL PLATING	RATING	
Q	YES	YES	SILVER 1, 2	SILVER <sup>2</sup>	POWER	CARRY: 6 AMPS CONTINUOUS. SWITCH: 250 mA @ 125 V AC or 28 V DC.
G	YES	YES	GOLD OVER SILVER <sup>3, 4</sup>	GOLD <sup>4</sup>	LOW LEVEL/DRY CIRCUIT OR POWER	0.4 VA MAX. @ 20 V AC or DC MAX. or, CARRY: 6 AMPS CONTINUOUS. SWITCH: 250 mA @ 125 V AC or 28 V DC.

\* Note: See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.

<sup>1</sup> MOVABLE CONTACTS: Non-shorting: Copper alloy, silver plated.

Shorting: Zinc alloy, silver plated.

<sup>2</sup> STATIONARY CONTACTS & ALL TERMINALS: Copper alloy, silver plated.

<sup>3</sup> MOVABLE CONTACTS: Non-shorting: Copper alloy, with gold plate over nickel plate, over silver plate. Shorting: Zinc alloy, with gold plate

<sup>4</sup> STATIONARY CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate over silver plate.




NOTE: Any models supplied with Q G contact material are RoHS compliant. For the latest information regarding RoHS compliance, please go to: www.ittcannon.com/rohs.

All models R when ordered with S1-S6 stainless steel actuator options.



Dimensions are shown: Inch (mm) Specifications and dimensions subject to change

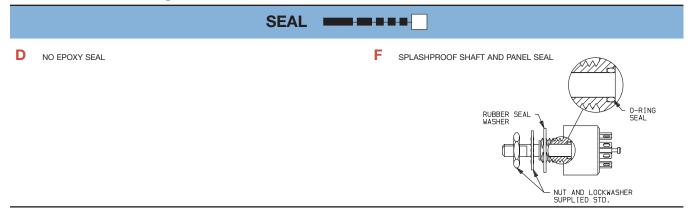

## Setting Stops With Stop Pins

## MA00, MB00, MC00 & MD00 Models Only:

The number of switch positions or stops are adjustable by means of stop pins provided with each switch. Switches are normally shipped with stop pins and hardware in bulk, not installed. Without stop pins, switches have full 360° rotation and no stops. Note that all two pole models begin to repeat when actuated 180° or more.


To set stops, refer to figures 1 & 2. Orient switch so that terminal no. 1 is as shown. Turn actuator to position 1, using flats on bushing and terminal no. 1 as reference. Install CCW stop pin in hole designated 'X'. Install second stop pin in hole number corresponding to the number of positions desired. Note that two pole models will begin to repeat when actuated 180° or more. To retain stop pins, use adhesive mylar washer included; see figure 3.

All models except MX00 models have number of switch positions or stops pre-set at factory and are not adjustable.

### Hardware:

Rotary

Two stop pins, mounting nut, and lockwasher supplied standard.

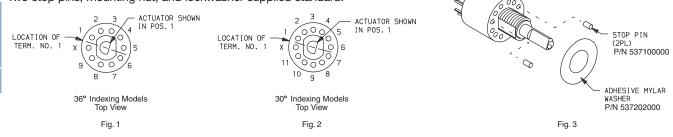

## Setting Stops With Stop Rings

## ME00, MF00, MG00 & MH00 Models Only:

The number of switch positions or stops are adjustable by means of stop rings provided with each switch. These models are normally shipped with stop rings and hardware in bulk, not installed. Without stop rings, switches have full 360° rotation and no stops. Note that all two pole models begin to repeat when actuated 180° or more.


To set stops refer to figures 4 & 5. Orient switch so that terminal no. 1 is as shown. Turn actuator to pos. 1 using flats on bushing and terminal no. 1 as reference. See figure 6 and install inner stop ring with short tab in hole designated 'X'. <u>Install outer</u> <u>stop ring with long tab</u> in hole number corresponding to the number of positions desired. Note that all two pole models begin to repeat when actuated 180° or more. Use mounting nut and lockwasher to retain stop rings.

## All MEXX, MFXX, MGXX & MHXX Models (Except MX00 models):

Number of switch positions or stops are preset at factory, but are user adjustable.

## Hardware:

Two stop rings, mounting nut and lockwasher supplied standard.

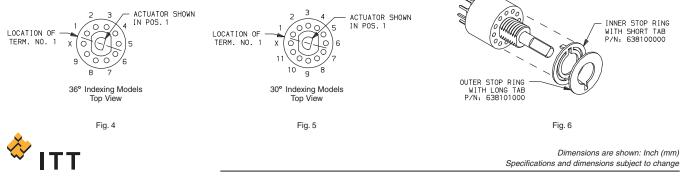

www.ittcannon.com

**AVAILABLE HARDWARE** Washer Stop pins Stop Ring INNER STOP RING WITH SHORT TAB P/N: 638100000 OUTER STOP RING · WITH LONG TAB P/N: 638101000 One each required for setting stops. PART NO. PART NO. PART NO. 638100000 INNER-W/SHORT TAB 586800000 RUBBER PANEL SEAL 537100000 ADHESIVE MYLAR RETAINS STOP PINS 638101000 OUTER-W/LONG TAB 537202000

NOTE: Additional nuts and lockwashers available separately, see section "Technical Data and Additional Hardware".





Dimensions are shown: Inch (mm) Specifications and dimensions subject to change



