


Vishay High Power Products

Schottky Rectifier, 16 A



PRODUCT SUMMARY				
I _{F(AV)} 16 A				
V _R	35/45 V			
I _{RM}	40 mA at 125 °C			

FEATURES

- 150 °C T_J operation
- High frequency operation

· Low forward voltage drop



- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Lead (Pb)-free ("PbF" suffix)
- Designed and qualified for Q101 level

DESCRIPTION

This MBRB16.. Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150 °C junction temperature. Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

MAJOR RATINGS AND CHARACTERISTICS				
SYMBOL	CHARACTERISTICS	VALUES	UNITS	
I _{F(AV)}	Rectangular waveform	16	А	
V _{RRM}		35/45	V	
I _{FSM}	$t_p = 5 \mu s \text{ sine}$	1800	А	
V _F	16 Apk, T _J = 125 °C	0.57	V	
T _J		- 65 to 150	°C	

VOLTAGE RATINGS				
PARAMETER	SYMBOL	MBRB1635PbF	MBRB1645PbF	UNITS
Maximum DC reverse voltage	V_{R}	35	45	V
Maximum working peak reverse voltage	V_{RWM}	35	45	V

ABSOLUTE MAXIMUM RATINGS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum average forward current	I _{F(AV)}	T _C = 134 °C, rated V _R		16	
Non-repetitive peak surge current	I _{FSM}	5 μs sine or 3 μs rect. pulse	Following any rated load condition and with rated V _{RRM} applied	1800	А
		Surge applied at rated load condition halfwave single phase 60 Hz		150	
Non-repetitive avalanche energy	E _{AS}	$T_J = 25 ^{\circ}\text{C}, I_{AS} = 3.6 \text{A}, L = 3.7 \text{mH}$		24	mJ
Repetitive avalanche current	I _{AR}	Current decaying linearly to zero in 1 μ s Frequency limited by T _J maximum V _A = 1.5 x V _R typical		3.6	А

^{*} Pb containing terminations are not RoHS compliant, exemptions may apply

MBRB16..PbF

Vishay High Power Products Schottky Rectifier, 16 A



ELECTRICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum forward voltage drop	V _{FM} ⁽¹⁾	16 A	T _J = 25 °C	0.63	- v
			T _J = 125 °C	0.57	
Maximum instantaneous	I _{RM} ⁽¹⁾	T _J = 25 °C	Rated DC voltage	0.2	- mA
reverse current	IRM (1)	T _J = 125 °C		40	
Maximum junction capacitance	C _T	$V_R = 5 V_{DC}$ (test signal range 100 kHz to 1 MHz) 25 °C		1400	pF
Typical series inductance	L _S	Measured lead from top of terminal to mounting plane		8.0	nH
Maximum voltage rate of change	dV/dt	Rated V _R		10 000	V/µs

Note

 $^{^{(1)}\,}$ Pulse width < 300 $\mu s,$ duty cycle < 2 %

THERMAL - MECHANICAL SPECIFICATIONS					
PARAMETER		SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum junction temperature	e range	T_J		- 65 to 150	°C
Maximum storage temperature	e range	T _{Stg}		- 65 to 175	10
Maximum thermal resistance, junction to case		R _{thJC}	DC operation	1.50	°C/W
Typical thermal resistance, case to heatsink		R _{thCS}	Mounting surface, smooth and greased	0.50	*C/VV
Approximate weight				2	g
Approximate weight				0.07	OZ.
Mounting torque —	minimum			6 (5)	kgf · cm
	maximum			12 (10)	(lbf \cdot in)
Marking device			Case style D ² PAK	MBRE	31645

Document Number: 94304 Revision: 15-Aug-08



Schottky Rectifier, 16 A Vishay High Power Products




Fig. 1 - Maximum Forward Voltage Drop Characteristics




Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage




Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

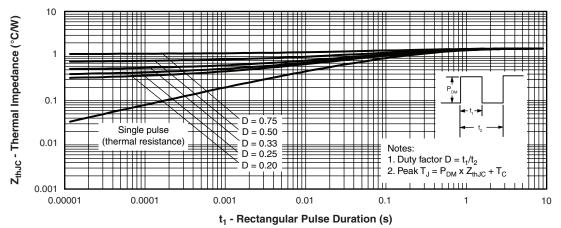


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

Vishay High Power Products Schottky Rectifier, 16 A






Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current




Fig. 6 - Forward Power Loss Characteristics




Fig. 7 - Maximum Non-Repetitive Surge Current (Per Leg)




Fig. 8 - Unclamped Inductive Test Circuit

Note

⁽¹⁾ Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$; $\begin{array}{l} Pd = Forward\ power\ loss = I_{F(AV)}\ x\ V_{FM}\ at\ (I_{F(AV)}\!/D)\ (see\ fig.\ 6); \\ Pd_{REV} = Inverse\ power\ loss = V_{R1}\ x\ I_{R}\ (1\ -\ D);\ I_{R}\ at\ V_{R1} = Rated\ V_{R}\ applied \end{array}$


Document Number: 94304 Revision: 15-Aug-08



Schottky Rectifier, 16 A Vishay High Power Products

ORDERING INFORMATION TABLE

Device code



1 - Essential part number

B = Surface mount

6

Current rating (16 = 16 A)

4 - Voltage code = V_{RRM} 35 = 35 V 45 = 45 V

- • None = Tube (50 pieces)

• TRL = Tape and reel (left oriented)

• TRR = Tape and reel (right oriented)

None = Standard productionPbF = Lead (Pb)-free

LINKS TO RELATED DOCUMENTS				
Dimensions http://www.vishay.com/doc?95046				
Part marking information	http://www.vishay.com/doc?95054			
Packaging information	http://www.vishay.com/doc?95032			

Document Number: 94304 Revision: 15-Aug-08



Vishay

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Revision: 18-Jul-08

Document Number: 91000 www.vishay.com