Dual DPDT Low R_{ON}, Low Capacitance Switch

The NLAS3899B is a dual DPDT analog switch designed for low power audio and dual SIM card applications. The low R_{ON} of 3.0 Ω (typical) is ideal for routing audio signals to or from a moderately high impedance load. In addition, the low C_{ON} of 20 pF (typical) gives the NLAS3899B a high bandwidth of 280 MHz, perfect for dual SIM card applications.

Features

- Single Supply Operation
 - 1.65 to 4.3 V V_{CC}
 - Function Directly from Li-Ion Battery
- Low ON Resistance (3.0 Ω Typical Across $V_{CC})$
- Low C_{ON} (20 pF Typical)
- Bandwidth 280 MHz
- Maximum Breakdown Voltage: 5.5 V
- Low Static Power
- Interfaces with 1.8 V Chipset
- These are Pb–Free Devices

Typical Applications

- Cell Phone Speaker/Microphone Switching
- Ringtone-Chip/Amplifier Switching
- Dual SIM Card Data Switching
- Four Unbalanced (Single-Ended) Switches

Important Information

• ESD Protection: Human Body Model (HBM) 1000 V – All Pins


5000 V – I/O to GND

- Continuous Current Rating Through each Switch ±300 mA
- Conforms to: JEDEC MO-220, Issue H, Variation VEED-6
- Package:
 - 1.8 x 2.6 x 0.75 mm WQFN16 Pb-Free
 - 3.0 x 3.0 x 0.9 mm QFN16 Pb-Free




ON Semiconductor®

http://onsemi.com



- XX = Specific Device Code
- A = Assembly Location
- M = Date Code/Assembly Location
- L = Wafer Lot
- Y = Year
- W = Work Week
 - = Pb-Free Package

(Note: Microdot may be in either location)



ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 8 of this data sheet.

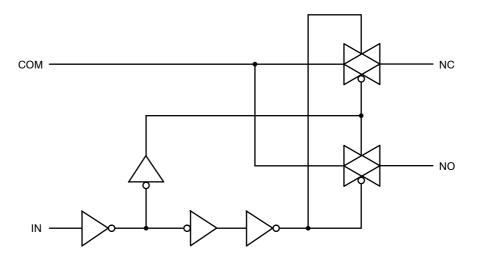


Figure 1. Input Equivalent Circuit

PIN DESCRIPTION

QFN PIN #	Symbol	Name and Function
1, 3, 5, 7, 9, 11, 13, 15	NO A-D, NC A-D	Independent Channels
2, 10	A–B IN, C–D IN	Controls
4, 8, 12, 16	COM A-D	Common Channels
6	GND	Ground (V)
14	V _{CC}	Positive Supply Voltage

TRUTH TABLE

IN	NO	NC
н	ON	OFF*
L	OFF*	ON

*High impedance.

OPERATING CONDITIONS

MAXIMUM RATINGS

Symbol	Pins	Parameter	Value	Condition	Unit
V _{CC}	V _{CC}	Positive DC Supply Voltage	-0.5 to +5.5		V
V _{IS}	NOx, NCx, or COMx	Analog Signal Voltage	–0.5 to V _{CC} + 0.5		V
V _{IN}	A-B IN, C-D IN	Control Input Voltage	-0.5 to 5.5		V
IIS_CON	NOx, NCx, or COMx	Analog Signal Continuous Current	±300	Closed Switch	mA
I _{IS_PK}	NOx, NCx, or COMx	Analog Signal Peak Current	±500	10% Duty Cycle	mA
I _{IN}	A-B IN, C-D IN	Control Input Current	±20		mA
T _{STG}		Storage Temperature Range	-65 to 150		°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

Symbol	Pins	Parameter	Value	Condition	Unit
V _{CC}	V _{CC}	Positive DC Supply Voltage	1.65 to 4.3		V
V _{IS}	NOx, NCx, or COMx	Analog Signal Voltage	GND to V _{CC}		V
V _{IN}	A-B IN, C-D IN	Control Input Voltage	GND to 4.3		V
T _A		Operating Temperature Range	-40 to +85		°C
t _r , t _f		Input Rise or Fall Time	20	V _{CC} = 1.6 V – 2.7 V	ns/V
			10	$V_{CC} = 3.0 \text{ V} - 4.5 \text{ V}$	

Minimum and maximum values are guaranteed through test or design across the **Recommended Operating Conditions**, where applicable. Typical values are listed for guidance only and are based on the particular conditions listed for each section, where applicable. These conditions are valid for all values found in the characteristics tables unless otherwise specified in the test conditions.

ESD PROTECTION

Pins	Description	Minimum Voltage
All Pins	Human Body Model	1 kV
I/O to GND	Human Body Model	5 kV

DC Electrical Characteristics

Typical: T = 25°C; V_{CC} = 3.0 V

CONTROL INPUT (Typical: T = $25^{\circ}C$; V_{CC} = 3.0 V)

				V _{CC}	-40	0°C to +85	i°C	
Symbol	Pins	Parameter	Test Conditions	(V)	Min	Тур	Max	Unit
V _{IH}	A–B IN, C–D IN	Control Input High		3.0 4.3	1.3 1.6			V
V _{IL}	A–B IN, C–D IN	Control Input Low		3.0 4.3			0.5 0.6	V
I _{IN}	A–B IN, C–D IN	Control Input Leakage	$0 \le V_{IN} \le V_{CC}$	4.3		±0.1	±1.0	μA

SUPPLY CURRENT AND LEAKAGE (Typical: T = 25°C; V_{CC} = 3.0 V)

				V _{CC}	-4	0°C to +85	5°C	
Symbol	Pins	Parameter	Test Conditions	(V)	Min	Тур	Max	Unit
I _{NO/NC} (OFF)	NCx, NOx	OFF State Leakage		4.3		±10	±300	nA
I _{COM} (ON)	COMx	ON State Leakage	$ \begin{array}{l} V_{IN} = V_{IL} \mbox{ or } V_{IH} \\ V_{NO} = 0.3 \mbox{ V or } 4.0 \mbox{ V with} \\ V_{NC} \mbox{ floating or} \\ V_{NC} = 0.3 \mbox{ V or } 4.0 \mbox{ V with} \\ V_{NO} \mbox{ floating} \\ V_{COM} = 0.3 \mbox{ V or } 4.0 \mbox{ V} \end{array} $	4.3		±10	±300	nA
I _{CC}	V _{CC}	Quiescent Supply	V_{IN} and V_{IS} = V_{CC} or GND I_{D} = 0 A	1.65 – 4.3		±1.0	±2.0	μA
I _{OFF}	A–B IN, C–D IN	Power Off Leakage	$V_{IN} = 4.3 \text{ V or GND}$	0		±0.5	±2.0	μΑ

ON RESISTANCE (Typical: T = 25° C; V_{CC} = 3.0 V)

				v _{cc}	-40	0°C to +85	5°C	
Symbol	Pins	Parameter	Test Conditions	(V)	Min	Тур	Max	Unit
R _{ON}	NOx, NCx COMx	ON Resistance	$I_{ON} = -100 \text{ mA}$ $V_{IS} = 0 \text{ to } V_{CC}$	2.5 3.0 3.6 4.3		3.0 2.6 2.5 2.2	4.0 3.0 3.0 2.5	Ω
R _{FLAT}	NOx, NCx COMx	R _{ON} Flatness	$I_{ON} = -100 \text{ mA}$ $V_{IS} = 0 \text{ to } V_{CC}$	3.0 4.3		0.8 1.1		Ω
ΔR_{ON}	NOx, NCx COMx	R _{ON} Matching	$I_{ON} = -100 \text{ mA}$ $V_{IS} = 0 \text{ to } V_{CC}$	3.0 4.3		0.8 0.7		Ω

AC ELECTRICAL CHARACTERISTICS


				V _{CC}	-40	0°C to +85	5°C	
Symbol	Pins	Parameter	Test Conditions	(V)	Min	Тур	Max	Unit
t _{ON}	IN to NCx or NOx	Turn On Time		2.3 - 4.3		30	40	ns
t _{OFF}	IN to NCx or NOx	Turn Off Time		2.3 - 4.53		20	30	ns
t _{BBM}	IN to NCx or NOx	Break Before Make		3.0	2	15		ns
BW		-3dB Bandwidth	C _L = 5 pF	1.65 – 4.3		280		MHz


ISOLATION AND THD (Typical: T = 25°C; V_{CC} = 3.0 V, RL = 50 Ω , CL = 5 pF, f = 1 MHz)


				V _{CC}	-4	0°C to +85	°C	
Symbol	Pins	Parameter	Test Conditions	(V)	Min	Тур	Мах	Unit
Q		Charge Injection		1.65 – 4.3		111		рС
THD		Total Harmonic Dis- tortion	$\begin{array}{l} {F_{IS} = 20 \text{ Hz to } 20 \text{ Hz}} \\ {R_L = R_{gen} = 600 \ \Omega,} \\ {C_L = 1.0 \text{ pF}} \\ {V_{IS} = 1.0 \text{ V}_{PP}} \end{array}$	3.0		0.007		%
V _{ONL}		Maximum Feed- through On Loss	$V_{IN} = 0 \text{ dBm } @ 100 \text{ kHz to 50 MHz}$ V_{IN} centered between $V_{CC} \& \text{GND}$	1.65 – 4.3		-0.06		dB
O _{IRR}	NOx	Off Isolation	$V_{IN} = 0$ V_{NO} or V_{NC} (pk-pk) = 1.0 V	1.65 – 4.3		-67		dB
Xtalk	COMx to COMy	Non-Adjacent Chan- nel	$V_{NO} \text{ or } V_{NC} (pk-pk) = 1.0 \text{ V}$	1.65 – 4.3		-100		dB


CAPACITANCE (Typical: T = 25°C; V_{CC} = 3.0 V, R_L = 50 Ω , C_L = 5 pF, f = 1 MHz)


				Vcc	V _{cc}	-40	0°C to +85	°C	
Symbol	Pins	Parameter	Test Conditions	(V)	Min	Тур	Мах	Unit	
C _{IN}	A–B IN, C–D IN	Control Input		0 V		5.0		pF	
C _{ON}	NCx to COMx	Through Switch	V _{IN} = 0V	3.0 V		20		pF	
C _{OFF}	NCx NOx	Unselected Port	$V_{IS} = 3.0V, V_{IN} = 3.0V$	3.0 V		10		pF	

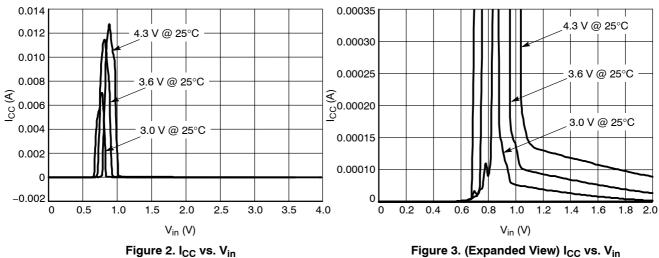













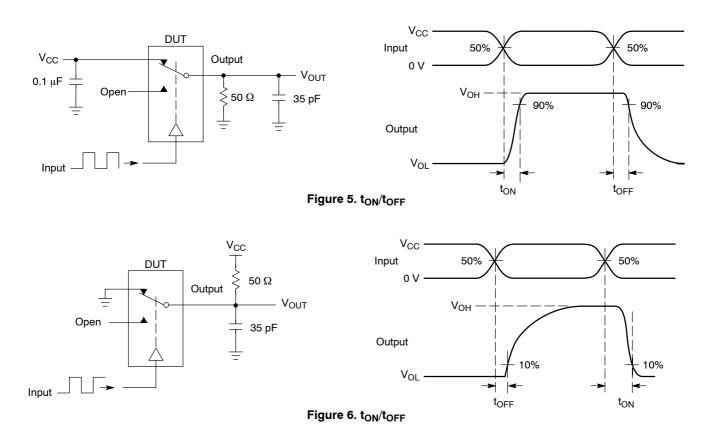

http://onsemi.com 6




Channel switch control/s test socket is normalized. Off isolation is measured across an off channel. On loss is the bandwidth of an On switch. V_{ISO} , Bandwidth and V_{ONL} are independent of the input signal direction.

$$\begin{split} V_{ISO} &= \text{Off Channel Isolation} = 20 \text{ Log } \left(\frac{V_{OUT}}{V_{IN}}\right) & \text{for } V_{IN} \text{ at } 100 \text{ kHz} \\ V_{ONL} &= \text{On Channel Loss} = 20 \text{ Log } \left(\frac{V_{OUT}}{V_{IN}}\right) & \text{for } V_{IN} \text{ at } 100 \text{ kHz to } 50 \text{ MHz} \end{split}$$

Bandwidth (BW) = the frequency 3 dB below V_{ONL}

 V_{CT} = Use V_{ISO} setup and test to all other switch analog input/outputs terminated with 50 Ω



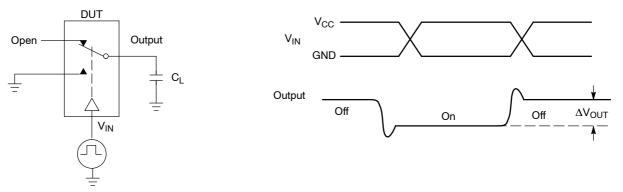


Figure 8. Charge Injection: (Q)


DEVICE ORDERING INFORMATION

Device Order Number	Package Type	Tape & Reel Size [†]
NLAS3899BMNTBG	WQFN16 (Pb-Free)	3000 / Tape & Reel
NLAS3899BMNTXG	QFN16 (Pb-Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

PACKAGE DIMENSIONS

WQFN16 (1.8x2.6x0.4P) CASE 488AP-01 **ISSUE A**

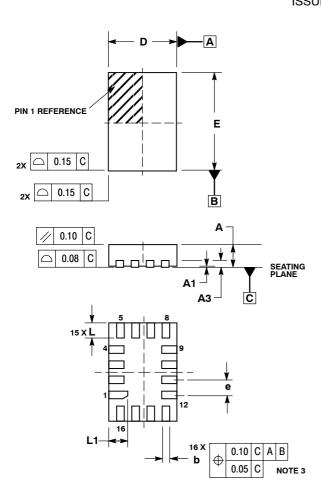


NOTES:

- NO LES: 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994. 2. CONTROLLING DIMENSION: MILLIMETERS 3. DIMENSION & APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 MM FORM TERMINAL
- FROM TERMINAL
 COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.
 EXPOSED PADS CONNECTED TO DIE FLAG.
- USED AS TEST CONTACTS.

	MILLIMETERS		
DIM	MIN	MAX	
Α	0.70	0.80	
A1	0.00	0.050	
A3	0.20 REF		
b	0.15	0.25	
D	1.80 BSC		
Е	2.60 BSC		
е	0.40 BSC		
L	0.30	0.50	
L1	0.40	0.60	

MOUNTING FOOTPRINT




*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PACKAGE DIMENSIONS

QFN16 3*3*0.85 MM, 0.5 P

CASE 485AE-01 ISSUE O

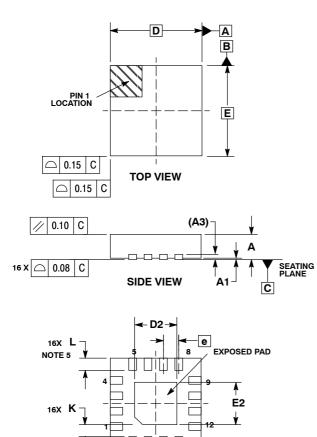

NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M. 1994.
- ASME Y14.5M, 1994. 2. CONTROLLING DIMENSION: MILLIMETERS. 3. DIMENSION 6 APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN
- 1 ERMINAL AND IS MEASURED BE I WEEN 0.25 AND 0.30 MM FROM TERMINAL. 4. COPLANARITY APPLIES TO THE EXPOSED
- PAD AS WELL AS THE TERMINALS.
 OUTLINE MEETS JEDEC DIMENSIONS PER MO-220, VARIATION VEED-6.

	MILLIMETERS			
DIM	MIN	NOM	MAX	
Α	0.800	0.900	1.000	
A1	0.000	0.025	0.050	
A3	0.200 REF			
b	0.180	0.250	0.300	
D	3.00 BSC			
D2	1.250	1.40	1.550	
Е	3.00 BSC			
E2	1.250	1.40	1.550	
е	0.500 BSC			
К	0.200			
L	0.300	0.400	0.500	

ON Semiconductor and use registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications in which the failure of the SCILLC product could create a situation where personal injury or deatth may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or deatth associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunit//Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

16

16X b

CAB

0.10

⊕ 0.05 C NOTE 3

13

BOTTOM VIEW

N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5773–3850 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative