TOSHIBA InGaAlP LED

# TLRMH20TP(F),TLSH20TP(F),TLOH20TP(F),TLYH20TP(F)


#### Panel Circuit Indicator

Unit: mm

- Lead(Pb)-free products (lead: Sn-Ag-Cu)
- 5mm package
- InGaAlP technology
- All plastic mold type
- Transparent lens
- Lineup: 3colors (red, orange, yellow)
- · High intensity light emission
- Excellent low current light output
- Applications: traffic signals, safety equipment
- Stopper lead type is also available TLRMH20T(F), TLSH20T(F), TLOH20T(F), TLYH20T(F)

## Lineup

Product Name	Color	Material
TLRMH20TP(F)	Red	
TLSH20TP(F)	Red	InGaAℓP
TLOH20TP(F)	Orange	ΠΟάλξι
TLYH20TP(F)	Yellow	

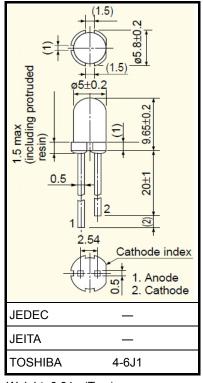

Weight: 0.31 g(Typ.)

### Absolute Maximum Ratings (Ta = 25°C)

Product Name	Forward Current I <sub>F</sub> (mA)	Reverse Voltage V <sub>R</sub> (V)	Power Dissipation P <sub>D</sub> (mW)	Operating Temperature T <sub>opr</sub> (°C)	Storage Temperature T <sub>stg</sub> (°C)	
TLRMH20TP(F)						
TLSH20TP(F)	50	4	120	<b>−40~100</b>	−40~120	
TLOH20TP(F)			120	<del>-40°100</del>	<del>-40*120</del>	
TLYH20TP(F)						

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

# **Electrical and Optical Characteristics (Ta = 25°C)**

Product Name	Typ. Emission Wavelength			Luminous Intensity I <sub>V</sub>		Forward Voltage V <sub>F</sub>		Reverse Current I <sub>R</sub>				
	$\lambda_{d}$	λР	Δλ	l <sub>F</sub>	Min	Тур.	lF	Тур.	Max	lF	Max	$V_{R}$
TLRMH20TP(F)	626	(636)	13	20	2720	9000	20	1.9	2.4	20	50	4
TLSH20TP(F)	613	(623)	13	20	4760	11000	20	2.0	2.4	20	50	4
TLOH20TP(F)	605	(612)	13	20	4760	15000	20	2.0	2.4	20	50	4
TLYH20TP(F)	587	(590)	13	20	4760	13000	20	2.0	2.4	20	50	4
Unit		nm		mA	m	cd	mA	\	/	mA	μА	V


### **Precautions**


Please be careful of the following:


- Soldering temperature: 260°C max, soldering time: 3 s max (soldering portion of lead: up to 1.6 mm from the body of the device)
- If the lead is formed, the lead should be formed up to 1.6 mm from the body of the device without forming stress to the resin. Soldering should be performed after lead forming.
- This visible LED lamp also emits some IR light.


  If a photodetector is located near the LED lamp, please ensure that it will not be affected by this IR light.

## TLRMH20TP(F)

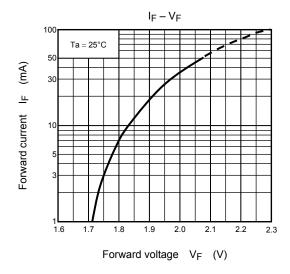

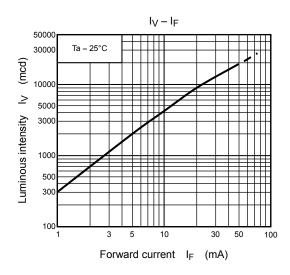


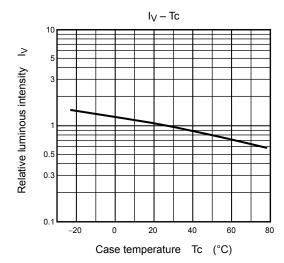


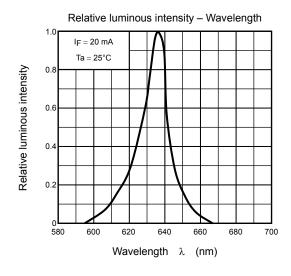





Ta = 25°C

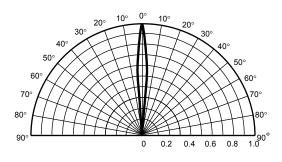


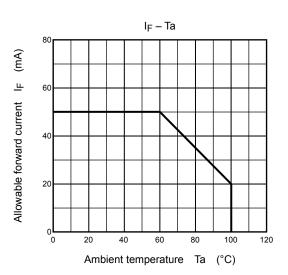


# TLSH20TP(F)

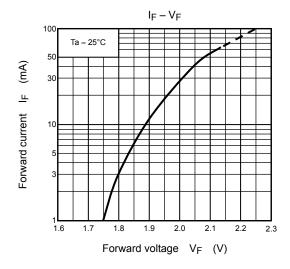

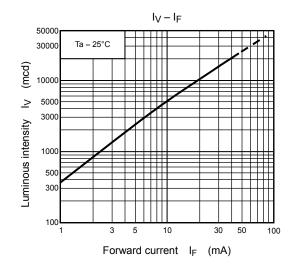


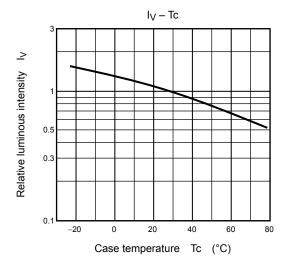


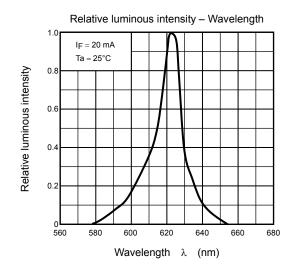


Radiation pattern


 $Ta = 25^{\circ}C$ 

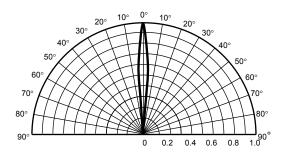


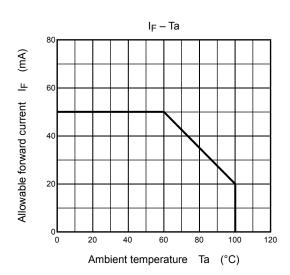


# TLOH20TP(F)

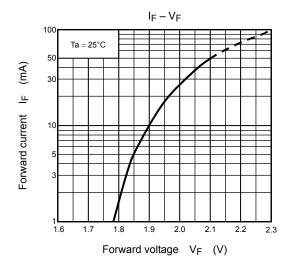

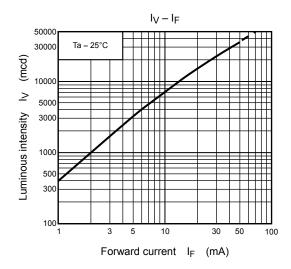


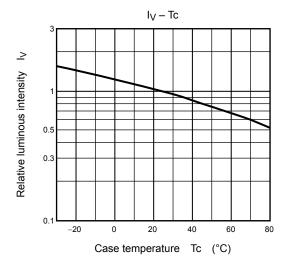


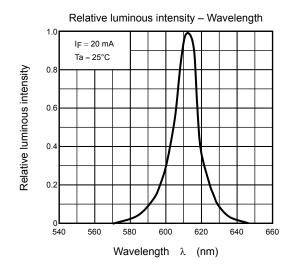





Ta = 25°C

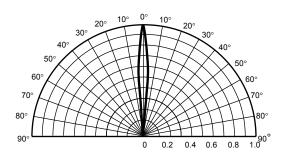


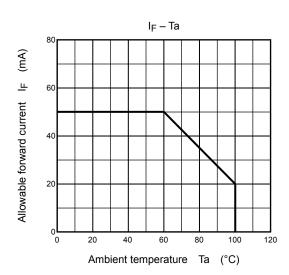



# TLYH20TP(F)

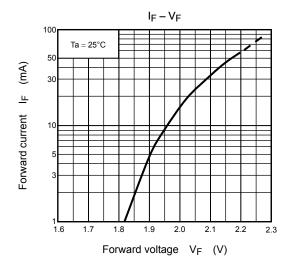

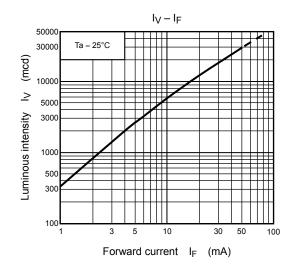


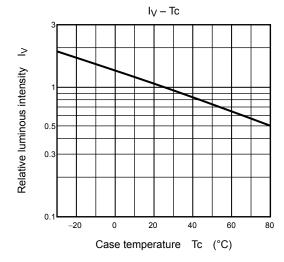

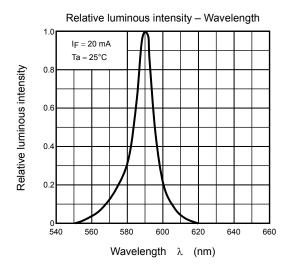

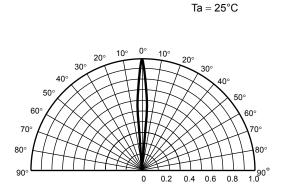

Radiation pattern

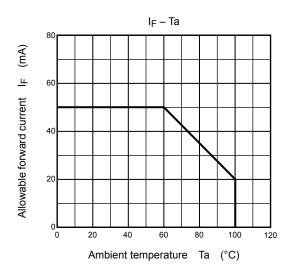

#### **RESTRICTIONS ON PRODUCT USE**

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
  In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in his document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No
  responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which
  may result from its use. No license is granted by implication or otherwise under any patents or other rights of
  TOSHIBA or the third parties.
- GaAs(Gallium Arsenide) is used in this product. The dust or vapor is harmful to the human body. Do not break, cut, crush or dissolve chemically.
- Please contact your sales representative for product-by-product details in this document regarding RoHS
  compatibility. Please use these products in this document in compliance with all applicable laws and regulations
  that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses
  occurring as a result of noncompliance with applicable laws and regulations.

2007-10-01