# Analog Multiplexers/ Demultiplexers with Injection Current Effect Control

# **Automotive Customized**

These devices are pin compatible to standard HC405x and MC1405xB analog mux/demux devices, but feature injection current effect control. This makes them especially suited for usage in automotive applications where voltages in excess of normal logic voltage are common.

The injection current effect control allows signals at disabled analog input channels to exceed the supply voltage range without affecting the signal of the enabled analog channel. This eliminates the need for external diode/ resistor networks typically used to keep the analog channel signals within the supply voltage range.

The devices utilize low power silicon gate CMOS technology. The Channel Select and Enable inputs are compatible with standard CMOS outputs.

### **Features**

- Injection Current Cross-Coupling Less than 1mV/mA (See Figure 9)
- Pin Compatible to HC405X and MC1405XB Devices
- Power Supply Range  $(V_{CC} GND) = 2.0 \text{ to } 6.0 \text{ V}$
- In Compliance With the Requirements of JEDEC Standard No. 7A
- Chip Complexity: 154 FETs or 36 Equivalent Gates
- These Devices are Pb-Free, Halogen Free and are RoHS Compliant




### ON Semiconductor®

http://onsemi.com

### MARKING DIAGRAMS




PDIP-16 N SUFFIX CASE 648





SOIC-16 D SUFFIX CASE 751B





SOIC-16 WIDE DW SUFFIX CASE 751G





TSSOP-16 DT SUFFIX CASE 948F



x = 1 or 2

A = Assembly Location

WL, L = Wafer Lot YY, Y = Year WW, W = Work Week G or ■ = Pb-Free Package

(Note: Microdot may be in either location)

### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 12 of this data sheet.

### X0 13 X1 X2\_15 ANALOG INPUTS/ OUTPUTS 12 MULTIPLEXER/ COMMON OUTPUT/ Х3-DEMULTIPLEXER INPUT X5 X6-11 CHANNEL 10 SELECT INPUTS С 6 ENABLE-PIN 16 = V<sub>CC</sub> PIN 8 = GND

Figure 1. MC74HC4851A Logic Diagram Single-Pole, 8-Position Plus Common Off

### **FUNCTION TABLE - MC74HC4851A**

Conti	ol Inp			
	;	Selec	t	
Enable	С	В	Α	ON Channels
L	L	L	L	X0
L	L	L	Н	X1
L	L	Н	L	X2
L	L	Н	Н	X3
L	Н	L	L	X4
L	Н	L	Н	X5
L	Н	Н	L	X6
L	Н	Н	Н	X7
Н	Х	Χ	Χ	NONE




Figure 2. MC74HC4851A 16-Lead Pinout (Top View)

### 13 X X1 X SWITCH X2 15 Х3 ANALOG INPUTS/OUTPUTS COMMON **OUTPUTS/INPUTS** Y1 Y SWITCH A 10 CHANNEL-SELECT PIN 16 = V<sub>CC</sub> PIN 8 = GND INPUTS В ENABLE 6

Figure 3. MC74HC4852A Logic Diagram Double-Pole, 4-Position Plus Common Off

### **FUNCTION TABLE - MC74HC4852A**

Conti	Control Inputs			
	Se	lect		
Enable	В	Α	ON Ch	annels
L	L	L	Y0	X0
L	L	Н	Y1	X1
L	Н	L	Y2	X2
L	Н	Н	Y3	X3
Н	X	X	NO	NE

X = Don't Care




Figure 4. MC74HC4852A 16-Lead Pinout (Top View)

### MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V <sub>CC</sub>	Positive DC Supply Voltage (Referenced to GND)	-0.5 to + 7.0	V
V <sub>in</sub>	DC Input Voltage (Any Pin) (Referenced to GND)	-0.5 to V <sub>CC</sub> + 0.5	V
I	DC Current, Into or Out of Any Pin	±25	mA
P <sub>D</sub>	Power Dissipation in Still Air, Plastic DIP† SOIC Package† TSSOP Package†	750 500 450	mW
T <sub>stg</sub>	Storage Temperature Range	-65 to + 150	°C
TL	Lead Temperature, 1 mm from Case for 10 Seconds Plastic DIP, SOIC or TSSOP Package	260	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

†Derating -Plastic DIP: - 10 mW/°C from 65° to 125°C SOIC Package: - 7 mW/°C from 65° to 125°C

TSSOP Package: - 6.1 mW/°C from 65° to 125°C

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation,  $V_{in}$  and Vout should be constrained to the range GND  $\leq$  (V<sub>in</sub> or V<sub>out</sub>)  $\leq$  V<sub>CC</sub>.

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V<sub>CC</sub>). Unused outputs must be left open.

### RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Parameter			Unit
V <sub>CC</sub>	Positive DC Supply Voltage (Reference	ced to GND)	2.0	6.0	V
V <sub>in</sub>	DC Input Voltage (Any Pin) (Referenced to GND)		GND	$V_{CC}$	V
V <sub>IO</sub> *	Static or Dynamic Voltage Across Switch		0.0	1.2	V
T <sub>A</sub>	Operating Temperature Range, All Packa	ige Types	<b>– 55</b>	+ 125	°C
t <sub>r</sub> , t <sub>f</sub>	(Channel Select or Enable Inputs)	V <sub>CC</sub> = 2.0 V V <sub>CC</sub> = 4.5 V V <sub>CC</sub> = 6.0 V	0	1000 500 400	ns

<sup>\*</sup>For voltage drops across switch greater than 1.2 V (switch on), excessive V<sub>CC</sub> current may be drawn; i.e., the current out of the switch may contain both V<sub>CC</sub> and switch input components. The reliability of the device will be unaffected unless the Maximum Ratings are exceeded.

### DC CHARACTERISTICS — Digital Section (Voltages Referenced to GND) VEE = GND, Except Where Noted

			V <sub>CC</sub>	Guaranteed Limit			
Symbol	Parameter	Condition	v	-55 to 25°C	≤ <b>85°C</b>	≤125°C	Unit
V <sub>IH</sub>	Minimum High-Level Input Voltage, Channel-Select or Enable Inputs	R <sub>on</sub> = Per Spec	2.0 3.0 4.5 6.0	1.50 2.10 3.15 4.20	1.50 2.10 3.15 4.20	1.50 2.10 3.15 4.20	V
V <sub>IL</sub>	Maximum Low-Level Input Voltage, Channel-Select or Enable Inputs	R <sub>on</sub> = Per Spec	2.0 3.0 4.5 6.0	0.50 0.90 1.35 1.80	0.50 0.90 1.35 1.80	0.50 0.90 1.35 1.80	V
l <sub>in</sub>	Maximum Input Leakage Current on Digital Pins (Enable/A/B/C)	V <sub>in</sub> = V <sub>CC</sub> or GND	6.0	± 0.1	± 1.0	± 1.0	μΑ
Icc	Maximum Quiescent Supply Current (per Package)	$V_{in(digital)} = V_{CC}$ or GND $V_{in(analog)} = GND$	6.0	2	20	40	μΑ

# DC CHARACTERISTICS — Analog Section

				Guara	nteed Lin	nit	
Symbol	Parameter	Condition	v <sub>cc</sub>	−55 to 25°C	≤ <b>85°C</b>	≤125°C	Unit
R <sub>on</sub>	Maximum "ON" Resistance	$V_{in} = V_{IL} \text{ or } V_{IH}; V_{IS} = V_{CC} \text{ to}$ GND; $I_S \le 2.0 \text{ mA}$	2.0 3.0 4.5 6.0	1700 1100 550 400	1750 1200 650 500	1800 1300 750 600	Ω
ΔR <sub>on</sub>	Delta "ON" Resistance	$V_{in}$ = $V_{IL}$ or $V_{IH}$ ; $V_{IS}$ = $V_{CC}/2$ $I_S \le 2.0$ mA	2.0 3.0 4.5 6.0	300 160 80 60	400 200 100 80	500 240 120 100	Ω
l <sub>off</sub>	Maximum Off-Channel Leakage Current, Any One Channel Common Channel	V <sub>in</sub> = V <sub>CC</sub> or GND	6.0	±0.1 ±0.1	±0.1 ±0.1	±0.1 ±0.1	μΑ
I <sub>on</sub>	Maximum On-Channel Leakage Channel-to-Channel	V <sub>in</sub> = V <sub>CC</sub> or GND	6.0	±0.1	±0.1	±0.1	μΑ

# AC CHARACTERISTICS ( $C_L = 50 \text{ pF}$ , Input $t_r = t_f = 6 \text{ ns}$ )

Symbol	Parameter		−55 to 25°C	≤ <b>85</b> °C	≤125°C	Unit
t <sub>PHL</sub> , t <sub>PLH</sub>	Maximum Propagation Delay, Analog Input to Analog Output		160 80 40 30	180 90 45 35	200 100 50 40	ns
t <sub>PHL</sub> , t <sub>PHZ,PZH</sub> t <sub>PLH</sub> , t <sub>PLZ,PZL</sub>	Maximum Propagation Delay, Enable or Channel-Select to Analog Output	2.0 3.0 4.5 6.0	260 160 80 78	280 180 90 80	300 200 100 80	ns
C <sub>in</sub>	Maximum Input Capacitance Digital Pins (All Switches Off) Any Single Analog Pin (All Switches Off) Common Analog Pin		10 35 130	10 35 130	10 35 130	pF
C <sub>PD</sub>	Power Dissipation Capacitance Typical	5.0	20			pF

# INJECTION CURRENT COUPLING SPECIFICATIONS ( $V_{CC}$ = 5V, $T_A$ = -55°C to +125°C)

Symbol	Parameter	Condition	Тур	Max	Unit
$V\Delta_{out}$	Maximum Shift of Output Voltage of Enabled Analog Channel	$I_{in}^* \le 1 \text{ mA}, R_S \le 3.9 \text{ k}\Omega$	0.1	1.0	mV
		$I_{in}^* \le 10 \text{ mA}, R_S \le 3.9 \text{ k}\Omega$	1.0	5.0	
		$I_{in}^* \le 1 \text{ mA}, R_S \le 20 \text{ k}\Omega$	0.5	2.0	
		$I_{in}$ * $\leq$ 10 mA, $R_S \leq$ 20 k $\Omega$	5.0	20	

<sup>\*</sup> I<sub>in</sub> = Total current injected into all disabled channels.

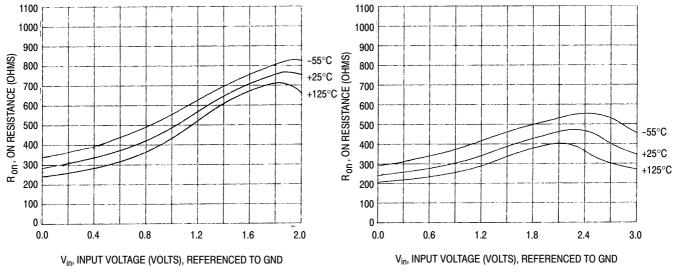


Figure 5. Typical On Resistance V<sub>CC</sub> = 2V

Figure 6. Typical On Resistance V<sub>CC</sub> = 3V

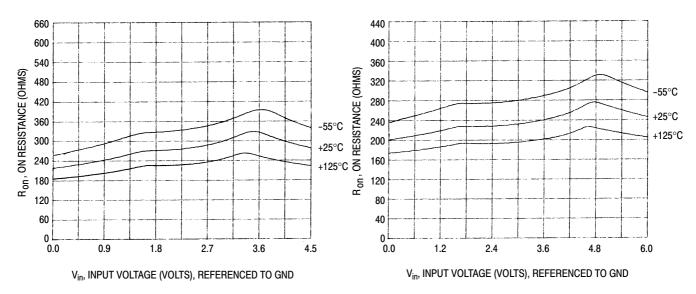


Figure 7. Typical On Resistance V<sub>CC</sub> = 4.5V

Figure 8. Typical On Resistance  $V_{CC} = 6V$ 

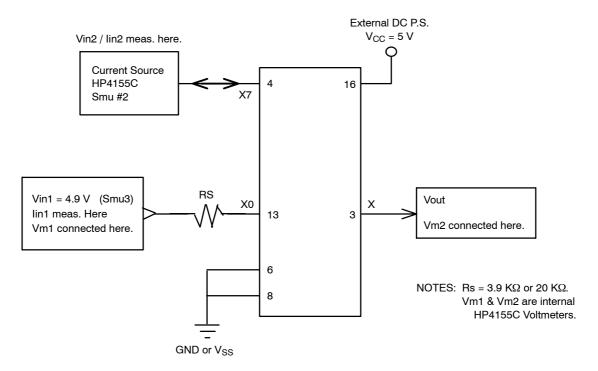


Figure 9. Injection Current Coupling Specification

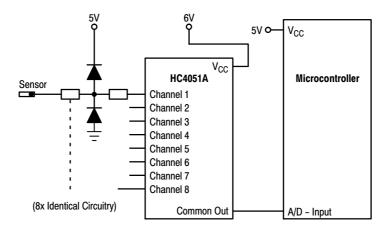
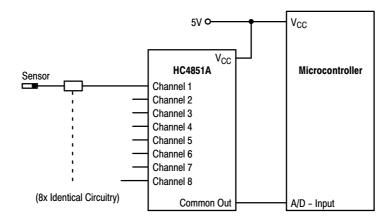


Figure 10. Actual Technology

Requires 32 passive components and one extra 6V regulator to suppress injection current into a standard HC4051 multiplexer



**Figure 11. MC74HC4851A Solution**Solution by applying the HC4851A multiplexer

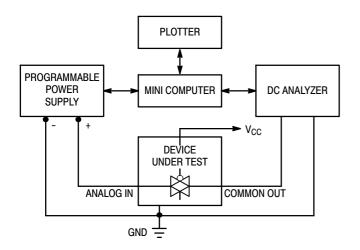


Figure 12. On Resistance Test Set-Up




Figure 13. Maximum Off Channel Leakage Current, Any One Channel, Test Set-Up




Figure 14. Maximum Off Channel Leakage Current, Common Channel, Test Set-Up




Figure 15. Maximum On Channel Leakage Current, Channel to Channel, Test Set-Up


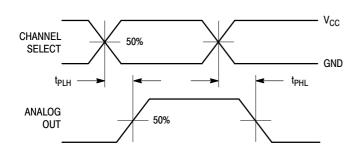


Figure 16. Propagation Delays, Channel Select to Analog Out



\*Includes all probe and jig capacitance

Figure 17. Propagation Delay, Test Set-Up Channel Select to Analog Out

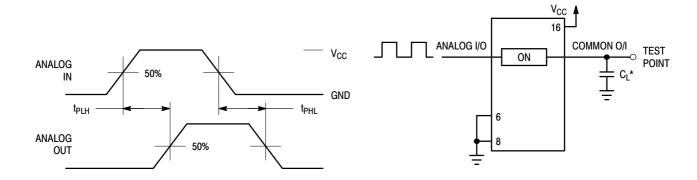


Figure 18. Propagation Delays, Analog In to Analog Out

Figure 19. Propagation Delay, Test Set-Up
Analog In to Analog Out

\*Includes all probe and jig capacitance

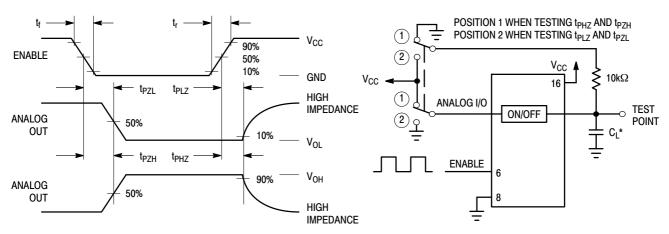


Figure 20. Propagation Delays, Enable to Analog Out

Figure 21. Propagation Delay, Test Set-Up Enable to Analog Out




Figure 22. Power Dissipation Capacitance, Test Set-Up

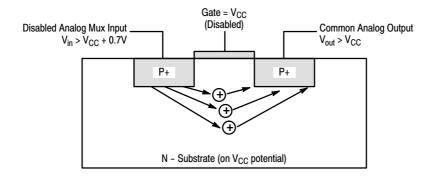


Figure 23. Diagram of Bipolar Coupling Mechanism

Appears if  $V_{\text{in}}$  exceeds  $V_{\text{CC}}\text{,}$  driving injection current into the substrate

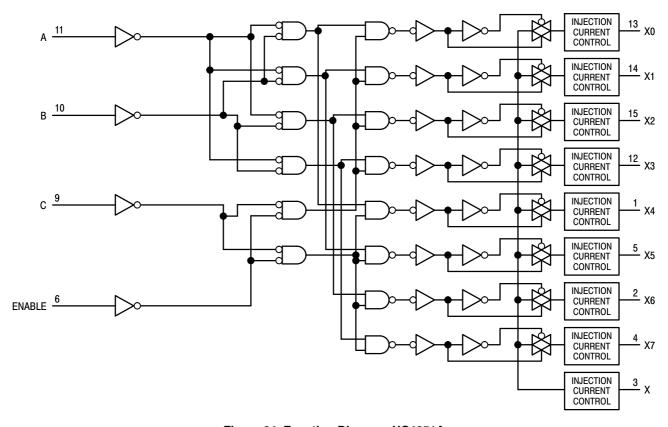


Figure 24. Function Diagram, HC4851A

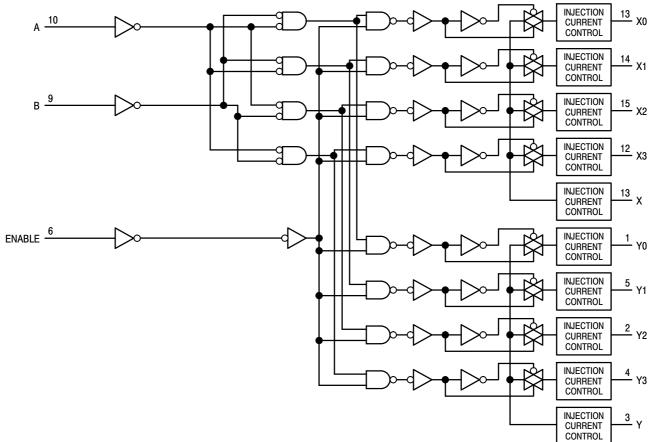


Figure 25. Function Diagram, HC4852A


### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
MC74HC4851ANG	PDIP-16 (Pb-Free)	500 Units / Box
MC74HC4851ADG	SOIC-16 (Pb-Free)	48 Units / Rail
MC74HC4851ADR2G	SOIC-16 (Pb-Free)	2500 Units / Tape & Reel
MC74HC4851ADTR2G	TSSOP-16*	2500 Units / Tape & Reel
MC74HC4851ADWG	SOIC-16 WIDE (Pb-Free)	48 Units / Rail
MC74HC4851ADWR2G	SOIC-16 WIDE (Pb-Free)	1000 Units / Tape & Reel
MC74HC4852ANG	PDIP-16 (Pb-Free)	500 Units / Box
MC74HC4852ADG	SOIC-16 (Pb-Free)	48 Units / Rail
MC74HC4852ADR2G	SOIC-16 (Pb-Free)	2500 Units / Tape & Reel
MC74HC4852ADTR2G	TSSOP-16*	2500 Units / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.
\*This package is inherently Pb–Free.

### PACKAGE DIMENSIONS

PDIP-16 **N SUFFIX** CASE 648-08 **ISSUE T** 

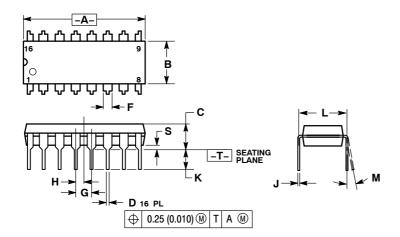


### NOTES:

- DIMENSIONING AND TOLERANCING PER
- ANSI Y14.5M, 1982.
  CONTROLLING DIMENSION: INCH.
  DIMENSION L TO CENTER OF LEADS
  WHEN FORMED PARALLEL.
- DIMENSION B DOES NOT INCLUDE MOLD FLASH.
- 5. ROUNDED CORNERS OPTIONAL.

	INCHES		MILLIMETER		
DIM	MIN	MAX	MIN	MAX	
Α	0.740	0.770	18.80	19.55	
В	0.250	0.270	6.35	6.85	
С	0.145	0.175	3.69	4.44	
D	0.015	0.021	0.39	0.53	
F	0.040	0.70	1.02	1.77	
G	0.100	BSC	2.54 BSC		
Н	0.050	BSC	1.27 BSC		
J	0.008	0.015	0.21	0.38	
K	0.110	0.130	2.80	3.30	
L	0.295	0.305	7.50	7.74	
М	0°	10 °	0 °	10 °	
S	0.020	0.040	0.51	1.01	

### SOIC-16 **D SUFFIX** CASE 751B-05 ISSUE K

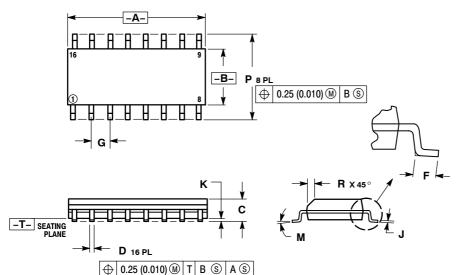


### NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
   CONTROLLING DIMENSION: MILLIMETER.

- CONTROLLING DIMENSION: MILLIMETER.
  DIMENSIONS A AND B DO NOT INCLUDE MOLD
  PROTRUSION.
  MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  DIMENSION D DOES NOT INCLUDE DAMBAR
  PROTRUSION. ALLOWABLE DAMBAR PROTRUSION
  SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D
  DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INC	HES	
DIM	MIN	MAX	MIN	MAX	
Α	9.80	10.00	0.386	0.393	
В	3.80	4.00	0.150	0.157	
С	1.35	1.75	0.054	0.068	
D	0.35	0.49	0.014	0.019	
F	0.40	1.25	0.016	0.049	
G	1.27	BSC	0.050 BSC		
J	0.19	0.25	0.008	0.009	
K	0.10	0.25	0.004	0.009	
M	0°	7°	0°	7°	
Р	5.80	6.20	0.229	0.244	
R	0.25	0.50	0.010	0.019	

### SOIC-16 WIDE **DW SUFFIX** CASE 751G-03 **ISSUE C**

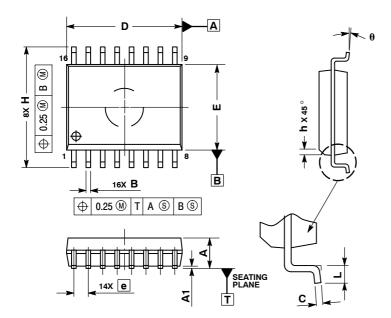

16X K REF


### NOTES:

- DIMENSIONS ARE IN MILLIMETERS.
- 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994.

  3. DIMENSIONS D AND E DO NOT INLCUDE MOLD PROTRUSION.
- MAXIMUM MOLD PROTRUSION 0.15 PER SIDE.
   DIMENSION B DOES NOT INCLUDE DAMBAR
- PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 TOTAL IN EXCESS OF THE B DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIN	MILLIMETERS		
DIM	MIN	MAX		
Α	2.35	2.65		
A1	0.10	0.25		
В	0.35	0.49		
С	0.23	0.32		
D	10.15	10.45		
Е	7.40	7.60		
е	1.27	BSC		
Η	10.05	10.55		
h	0.25	0.75		
L	0.50	0.90		
q	0 °	7 °		

TSSOP-16 **DT SUFFIX** CASE 948F-01 **ISSUE B** 

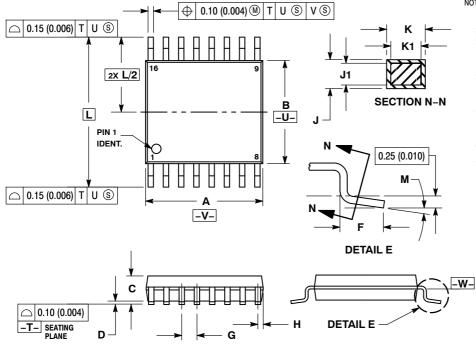

### NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI DIMENSI Y14.5M, 1982.
- T 14.3M, 1962.

  CONTROLLING DIMENSION: MILLIMETER.

  DIMENSION A DOES NOT INCLUDE MOLD FLASH.
  PROTRUSIONS OR GATE BURRS. MOLD FLASH OR
  GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER
- 5.1.2. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
- 5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
- TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
- 7. DIMENSION A DATUM PLANE -W-DIMENSION A AND B ARE TO BE DETERMINED AT

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
Α	4.90	5.10	0.193	0.200
В	4.30	4.50	0.169	0.177
С		1.20		0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC		0.026 BSC	
Н	0.18	0.28	0.007	0.011
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
Κ	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC		0.252 BSC	
М	0 °	8°	0°	8 °

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### **PUBLICATION ORDERING INFORMATION**

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81-3-5773-3850 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative