


Continental Device India Limited

An ISO/TS 16949, ISO 9001 and ISO 14001 Certified Company





PNP EPITAXIAL SILICON POWER TRANSISTORS



BD136 BD138 BD140

TO126 Plastic Package

Designed for use as Audio Amplifier and Drivers Utilizing

Complementary BD135, BD137, BD139

ABSOLUTE MAXIMUM RATINGS

DESCRIPTION	SYMBOL	BD136	BD138	BD140	UNIT
Collector -Emitter Voltage	V _{CEO}	45	60	80	V
Collector -Emitter Voltage (R _{BE} =1k W)	V _{CER}	45	60	100	V
Collector -Base Voltage	V_{CBO}	45	60	100	V
Emitter Base Voltage	V _{EBO}	·	5.0		V
Collector Current	I _C		1.5		Α
Collector Peak Current	I _{CM}	2.0			Α
Base Current	I _B	0.5		Α	
Power Dissipation @ T _a =25°C	P _D	1.25			W
Derate above 25°C		10		mW/ºC	
Power Dissipation @ T _c =25°C	P _D	12.5		W	
Derate above 25°C		100		mW/ºC	
Power Dissipation @ T _c =70°C	P _D	8.0		W	
Operating and Storage Junction Temperature Range	T _j , T _{stg}	- 55 to +150		°C	

THERMAL CHARACTERISTICS


Junction to Ambient in free air	R _{th (j-a)}	100	°C/W
Junction to Case	R _{th (j-c)}	10	°C/W

ELECTRICAL CHARACTERISTICS (T_c=25°C unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNIT
Collector Emitter Sustaining Voltage	*V _{CEO (sus)}	$I_C=30$ mA, $I_B=0$			
		BD136	45		V
		BD138	60		V
		BD140	80		V
Collector Cut Off Current	Сво	$V_{CB}=30V_{,}I_{E}=0$		0.1	μΑ
		$V_{CB}=30V_{,}I_{E}=0,$ $T_{c}=125^{\circ}C$		10	μΑ
Emitter Cut Off Current	L EBO	V_{EB} =5V, I_{C} =0		10	μΑ
DC Current Gain	*h _{FE}	I_{C} =0.005A, V_{CE} =2V	25		
		I_{C} =0.15A, V_{CE} =2V	40	250	
		$I_C=0.5A$, $V_{CE}=2V$	25		

^{*}Pulse test:- Pulse width=300ms, duty cycle=2%

PNP EPITAXIAL SILICON POWER TRANSISTORS



BD136 BD138 BD140

TO126 Plastic Package


ELECTRICAL CHARACTERISTICS (T_c=25°C unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNIT
DC Current Gain	*h _{FE} Group	I_{C} =0.15A, V_{CE} =2V			
		- 6	40	100	
		- 10	63	160	
		- 16	100	250	
		- 25	160	400	
Collector Emitter Saturation Voltage	*V _{CE (sat)}	I_{C} =0.5A, I_{B} =0.05A		0.5	V
Base Emitter On Voltage	*V _{BE(on)}	$*I_{C}=0.5A, V_{CE}=2V$		1.0	V

^{*}Pulse test:- Pulse width=300ms, duty cycle=2%

TO126
Plastic Package

T0-126 Leaded Plastic Package






DIM	Min	Max
Α	7.12	8.38
В	10.16	11.43
С	2.29	3.04
D	0.64	0.88
Е	2.040	2.285
F	0.39	0.63


DIM	Min	Max
G	4.07	5.08
L	15.00	16.63
M	0.89	1.65
N	3.31	4.44
Р	2.54	3.30
S	_	2.54

Pin Configurations

Pin 1: Emitter Pin 2: Collector Pin 3: Base

T0-126 Series Packaging Tube

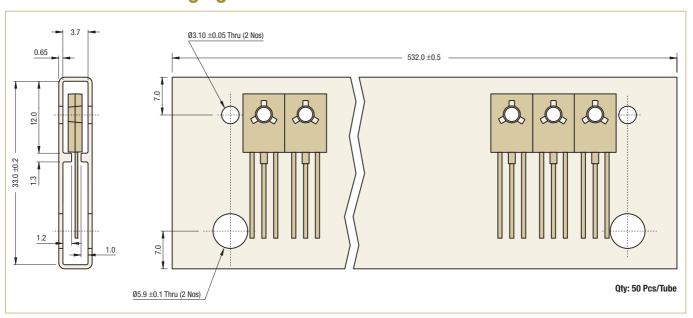

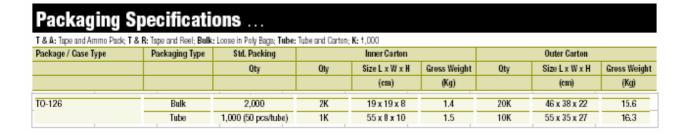

Notes

BD136 BD138 **BD140**

TO126 Plastic Package

Component Disposal Instructions

- 1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
- 2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India. Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119

email@cdil.com www.cdilsemi.com

BD136 138 140Rev 2 091002E