

TUV
MANAGEMENT SERVICE
SENTER SENTER SERVICE
SENTER SERVICE
SENTER SERVICE
SENTER SERVICE
SENTER SERVICE
SENTER SERVICE
SENTER SENTER SERVICE
SENTER SENTER SENTER SERVICE
SENTER SENTER

An ISO/TS16949 and ISO 9001 Certified Company


### NPN SILICON EPITAXIAL TRANSISTOR

CMBT2484 SOT23

1 = BASE 2 = EMITTER 3 = COLLECTOR

PIN CONFIGURATION (NPN)





# **LOW NOISE TRANSISTOR**

ABSOLUTE MAXIMUM RATINGS (Ta=25 deg C)

DESCRIPTION	SYMBOL	VALUE	UNIT
Collector -Base Voltage	VCBO	60	V
Collector -Emitter Voltage	VCEO	60	V
Emitter Base Voltage	VEBO	6	V
Collector Current -Continuous	IC	50	mA
Device Dissipation FR-5 Board*	PD	225	mW
Derate above 25 deg C		1.8	mW/deg C
Thermal Resistance Junction to Ambient	Rth (j-a)	556	deg C/W
Device Dissipation Alumina Substrate**	PD	300	mW
Derate above 25 deg C		2.4	mW/deg C
Thermal Resistance Junction to Ambient	Rth (j-a)	417	deg C/W
Junction and Storage Temperature Range	Tj,Tstg	-55 to +150	deg C

<sup>\*</sup>FR-5=1.0X0.75X0.062 in


**ELECTRICAL CHARACTERISTICS (TA=25 deg C unless otherwise noted)** 

CHARACTERISTICS SYN		YMBOL TEST CONDITION		TYP	MAX	UNIT
Collector -Emitter Voltage	VCEO	IC=10mA, IB=O	60	-	-	V
Collector -Base Voltage	VCBO	IC=10uA, IE=0	60	-	-	V
Emitter Base Voltage	VEBO	IE=10uA, IC=0	6.0	-	-	V
Collector Cut off Current	ICBO	VCB=45V, IE=0	-	-	10	nA
		VCB=45V, IE=0 TA=150 deg C	-	-	10	uA
Emitter Cut off Current	IEBO	VEB=5V, IC=0	-	-	10	nA
DC Current Gain	hFE	IC=1mA, VCE=5V	250	-	-	
		IC=10mA, VCE=5V	-	-	800	
Collector Emitter Saturation Voltage	VCE(Sat)	IC=1mA,IB=0.1mA	-	-	0.35	V
Base Emitter On Voltage	VBE(on)	IC=1mA, VCE=5V	-	-	0.95	V
SMALL SIGNAL CHARACTERISTICS						
Output Capacitance	Cobo	VCB=5V, IE=0 f=1MHz	-	-	6.0	pF
Input Capacitance	Cibo	VBE=0.5V, IC=0 f=1MHz	-	-	9.0	pF
Noise Figure	NF	IC=10uA, VCE=5V RS=10 kohms f=1kHz, BW=200Hz	-	-	4.0	dB

<sup>\*\*</sup>Alumine=0.4x0.3x0.024 in 99.5% alumina.


# **SOT-23 Formed SMD Package**

# SOT-23 Package Reel Information Reel specifications for W" Packing (13" reel)

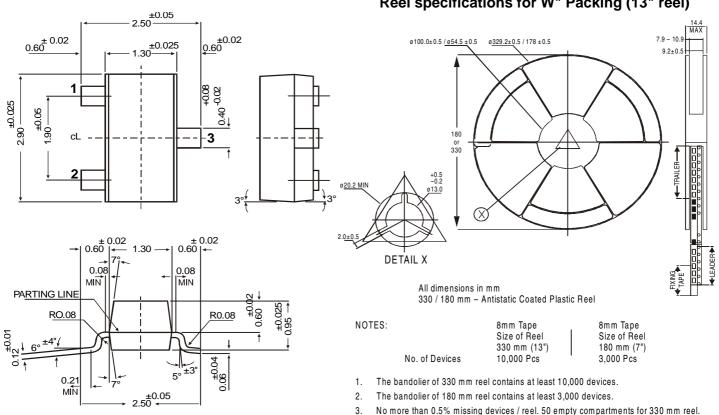

- No more than 0.5% missing devices / reel. 50 empty compartments for 330 mm reel.
   empty compartments for 180 mm reel.
- Three consecutive empty places might be found provided this gap is followed by 6 consecutive devices.
- The carrier tape (leader) starts with at least 75 empty positions (equivalent to 330 mm). In order to fix the carrier tape a self adhesive tape of 20 to 50 mm is applied. At the end of the bandolier at least 40 empty positions (equivalent to 160 mm) are there.

## **Tape Specification for SOT-23 Surface Mount Device**

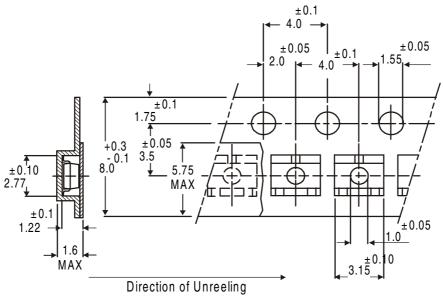

All dimensions in mm

# **Packing Detail**

1 doking botan								
PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX			
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt	
S0T-23 T&R	3K/reel	136 gm/3K pcs	3" x 7.5" x 7.5"	12.0K	17" x 15" x 13.5"	192.0K	12 kgs	
			9" x 9" x 9"	51.0K	19" x 19" x 19"	408.0K	28 kgs	
	10K/reel	415 gm/10K pcs	13" x 13" x 0.5"	10.0K	17" x 15" x 13.5"	300.0K	16 kgs	

#### **Customer Notes**

#### **Disclaimer**

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited
C-120 Naraina Industrial Area, New Delhi 110 028, India.
Telephone + 91-11-2579 6150, 5141 1112 Fax + 91-11-2579 5290, 5141 1119
email@cdil.com www.cdilsemi.com