

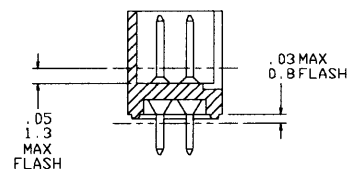




SEE TABLE

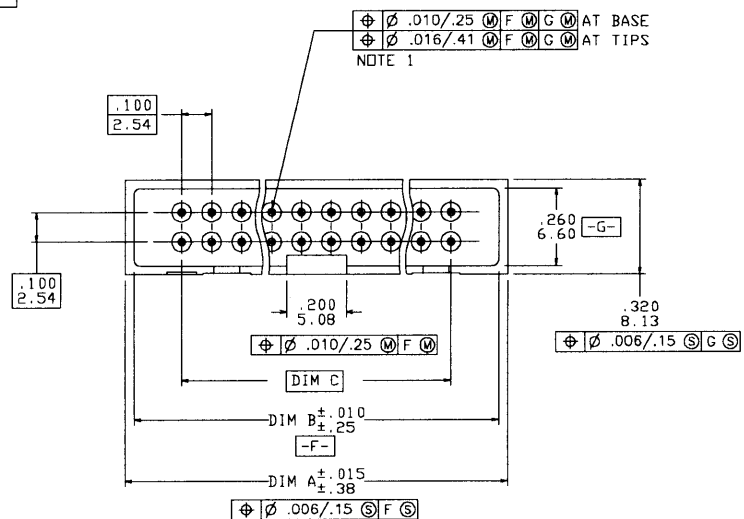

SECTION X-X

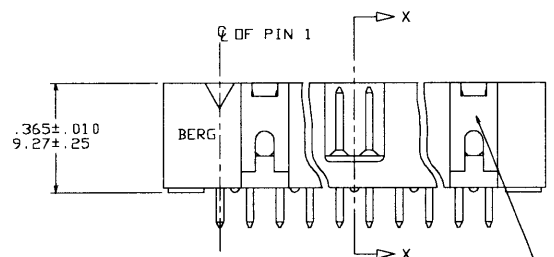

SEE SHEET 2 AND TABLES FOR
POLARIZATION FEATURE
ARRANGEMENT AND STYLE

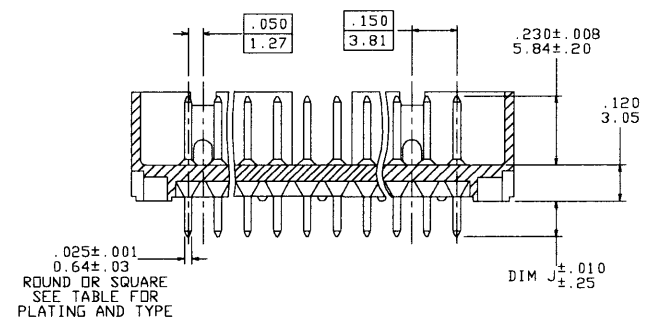

SECTION Y-Y

[illegible]


NOTE: THIS DOCUMENT IS THE PROPERTY OF AND EMBODIES PROPRIETARY INFORMATION OF BERG ELECTRONICS, INC.

NO PART OF THE INFORMATION SHOWN ON THIS DOCUMENT MAY BE USED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF BERG ELECTRONICS

FORM E-3067 REV 8/93

PRODUCT NUMBER

SEE TABLE



2 X 5
STYLE A



2 X 7
STYLE C



2 X 5
STYLE B



2 X 8 THRU 2 X 30
STYLE D



STYLE E

NOTES:

- ① SAME POSITION TOLERANCE APPLIES TO BOTH ENDS OF PINS.
- ② MOLDING MATERIAL: GLASS-FILLED POLYESTER, FLAME RETARDANT PER UL 94 V-0, COLOR: BLUE.
3. 1° MAX. DRAFT PERMISSIBLE ON ALL SURFACES.
4. 4 LBS./1.8 KG MIN. TERMINAL PULL-OUT FORCE.
- ⑤ TERMINAL MATERIAL: PHOSPHORUS BRONZE.
- ⑥ MOLDING MATERIAL: GLASS FILLED POLYESTER, FLAME RETARDANT PER UL 94V-0, COLOR - BLACK.
- ⑦ MOLDING MATERIAL: GLASS FILLED POLYESTER, FLAME RETARDANT PER UL 94V-0, COLOR - GREY.
- ⑧ PART NUMBERS WITH "R" FOLLOWING THE PART NUMBER (EXAMPLE 66506-326 R) HAS RETENTION (ONLY PARTS WITH .105, .120, AND .150 ROUND OR SQUARE TAILS CAN HAVE RETENTION.) LOCATION IS MANUFACTURER'S OPTION.
FOR ROUND PIN CONNECTORS:
15 LBS MAX INSERTION AND .25 LB MIN RETENTION FORCE WHEN USED IN .035±.003 DIA HOLES AND .062/1.57 THICK PC BOARD.
FOR SQUARE PIN CONNECTORS:
15 LBS MAX INSERTION AND .5 LB MIN RETENTION FORCE WHEN USED IN .040±.003 DIA HOLES AND .062/1.57 THICK PC BOARD.
- ⑨ PART NUMBERS WITH "T" FOLLOWING PART NUMBER (EXAMPLE 66506-068 T IS PACKED IN TUBES.) (CALL PRODUCT MANAGER FOR AVAILABILITY.)
10. SEE 68751 FOR LATCHES.
- ⑪ MAY BE ORDERED WITH "G" PACK PACKAGING BY ADDING "G" TO DASH NUMBER.

REVISIONS				SHEET INDEX	ISSUE SH NO.										
REV	ECN/DDR#	BY	DATE												
AD															
TOLERANCES UNLESS OTHERWISE SPECIFIED															
000 01 / 02 3															
LINEAR 0000 005 / 002 13															
00000 0020 / 0000 051															
ANGLES 0±.2															

DESIGNED BY	L. SANDERS	DATE	1/25/95	CUSTOMER COPY	
ENGINEER	M. SMYK	DATE	1/25/95		
PRODUCT FAMILY	CHK J. ROMBERGER	DATE	1/25/95		
CAGE CODE	22526	DATE	1/25/95		
APPROVED BY	M. SMYK	DATE	1/25/95		

BERG ELECTRONICS			
TITLE: HEADER QUICKIE SLIM LINE VERTICAL 4 WALL			
SCALE	SIZE	DWG NO.	SHEET
1:1	D	66506	2 of 2

NOTE: THIS DOCUMENT IS THE PROPERTY OF AND ENCODES PROPRIETARY INFORMATION OF BERG ELECTRONICS, INC. NO PART OF THE INFORMATION SHOWN ON THIS DOCUMENT MAY BE USED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF BERG ELECTRONICS, INC. FORM E-3067 REV 8/93

PRODUCT NUMBER	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING	PIN TYPE	PLASTIC MATERIAL
NOTE 2									
66506-001	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	NOTE 2
-002						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-003						.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	
-004						.105/2.67	150u"/3.81u TIN	SQ	
-005						.150/3.81	150u"/3.81u TIN	SQ	
-006	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.675/17.15	150u"/3.81u TIN	SQ	
-007	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-008						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-009						.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	
-010						.105/2.67	150u"/3.81u TIN	SQ	
-011						.150/3.81	150u"/3.81u TIN	SQ	
-012	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.675/17.15	150u"/3.81u TIN	SQ	
-013	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-014						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-015						.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	
-016						.105/2.67	150u"/3.81u TIN	SQ	
-017						.150/3.81	150u"/3.81u TIN	SQ	
-018	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.675/17.15	150u"/3.81u TIN	SQ	
-019	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-020						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-021						.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	
-022						.105/2.67	150u"/3.81u TIN	SQ	
-023						.150/3.81	150u"/3.81u TIN	SQ	
-024	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.675/17.15	150u"/3.81u TIN	SQ	
-025	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-026						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-027						.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	
-028						.105/2.67	150u"/3.81u TIN	SQ	
-029						.150/3.81	150u"/3.81u TIN	SQ	
-030	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.675/17.15	150u"/3.81u TIN	SQ	
-031	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-032						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-033						.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	
-034						.105/2.67	150u"/3.81u TIN	SQ	
66506-035	2 X 25	D	2.78/70.6	2.72/69.1	2.400/60.96	.150/3.81	150u"/3.81u TIN	SQ	NOTE 2

REVISIONS

REV	ECN/DDR#	BY	DATE
T			

SHEET INDEX

ISSUE

SH NO.

TOLERANCES UNLESS OTHERWISE SPECIFIED
0002 01 / 002 3
0002 005 / 0002 13
00002 0020 / 0002 051
002 7

LINEAR

ANGLES

DATE

BY

CHK

DATE

DATE

DATE

DATE

DATE

BERG
ELECTRONICS

HEADER QUICKIE SLIM LINE
VERTICAL 4 WALL

SCALE: 1:1 D 66506 3 of 3

PRODUCT NUMBER	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING	PIN TYPE	PLASTIC MATERIAL
NOTE 8 & 9									
66506-036	2 X 25	D	2.78/70.6	2.72/69.1	2.400/60.96	.675/17.15	150u"/3.81u TIN	SQ	NOTE 2
-037	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-038						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-039						.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	
-040						.105/2.67	150u"/3.81u TIN	SQ	
-041						.150/3.81	150u"/3.81u TIN	SQ	
-042	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.675/17.15	150u"/3.81u TIN	SQ	
-043	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-044						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-045						.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	
-046						.105/2.67	150u"/3.81u TIN	SQ	
-047						.150/3.81	150u"/3.81u TIN	SQ	
-048	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.675/17.15	150u"/3.81u TIN	SQ	
-049	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.150/3.81	30u"/0.76u GXT WITH GOLD FLASH	RD	
-050	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86				
-051	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48				
-052	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64				
-053	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26				
-054	2 X 25	D	2.78/70.6	2.72/69.1	2.400/60.96				
-055	2 X 7	C	.98/24.9	.92/23.4	.600/15.24				
-056	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.150/3.81	30u"/0.76u GXT WITH GOLD FLASH		
-057	2 X 30		3.28/83.3	3.22/81.8	2.900/73.66	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni		
-058						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-059						.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	
-060						.105/2.67	150u"/3.81u TIN	SQ	
-061						.150/3.81	150u"/3.81u TIN	SQ	
-062						.675/17.15	150u"/3.81u TIN	SQ	
-063						.105/2.67	30u"/0.76u GXT WITH GOLD FLASH	RD	
-064						.150/3.81		RD	
-065	2 X 30	D	3.28/83.3	3.22/81.8	2.900/73.66	.675/17.15		SQ	
-066	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.105/2.67		RD	
-067	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.675/17.15		SQ	
-068	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.105/2.67		RD	
-069	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.675/17.15		SQ	
66506-070	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.105/2.67	30u"/0.76u GXT WITH GOLD FLASH	RD	NOTE 2

REVISIONS				SHEET INDEX	ISSUE																
REV	ECN/DDR#	BY	DATE	INDEX	SH NO.																
T																					
TOLERANCES UNLESS OTHERWISE SPECIFIED																					
0002 01 / 02 3																					
LINEAR 00002 005 / 0002 13																					
000002 0020 / 00002 051																					
ANGLES 02 2																					
CAGE CODE 22526																					
DRAWN BY L SANDERS						DATE 1/27/95				CUSTOMER COPY											
ENGR M SMYK						DATE 1/27/95				TITLE											
CHK J REMBERGER						DATE 1/27/95				HEADER QUICKIE SLIM LINE											
APPRO M SMYK						DATE 1/27/95				VERTICAL 4 WALL											
UNIT INCH						SCALE 1:1				SIZE D				DWG NO. 66506							
														SHEET 4 OF							

BERG
ELECTRONICS

PRODUCT NUMBER	SIZE	STYLE	DIM A	DIM R	DIM C	DIM J	PIN PLATING	PIN TYPE	PLASTIC MATERIAL
NOTE 8 & 9									
66506-071	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.675/17.15	30u"/0.76u GXT WITH GOLD FLASH	SQ	NOTE 2
-072	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.105/2.67		RD	
-073	2 X 10		1.28/32.5	1.22/31.0	.900/22.36	.675/17.15		SQ	
-074	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.105/2.67		RD	
-075	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.675/17.15		SQ	
-076	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.105/2.67		RD	
-077	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.675/17.15		SQ	
-078	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.105/2.67		RD	
-079	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.675/17.15		SQ	
-080	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.105/2.67		RD	
-081	2 X 25	D	2.78/70.6	2.72/69.1	2.400/60.96	.675/17.15	30u"/0.76u GXT WITH GOLD FLASH	SQ	
-082	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.105/2.67	15u"/0.38u Au OVER 50u/1.27u Ni	RD	
-083	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.150/3.81		RD	
-084	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.675/17.15		SQ	
-085	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.105/2.67		RD	
-086	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.150/3.81		RD	
-087	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.675/17.15		SQ	
-088	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.105/2.67		RD	
-089	2 X 8		1.08/27.4	1.02/25.9	.700/17.78	.150/3.81		RD	
-090	2 X 8		1.08/27.4	1.02/25.9	.700/17.78	.675/17.15		SQ	
-091	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.105/2.67		RD	
-092	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.150/3.81		RD	
-093	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.675/17.15		SQ	
-094	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.105/2.67		RD	
-095	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.150/3.81		RD	
-096	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.675/17.15		SQ	
-097	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.105/2.67		RD	
-098	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.150/3.81		RD	
-099	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.675/17.15		SQ	
-100	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.105/2.67		RD	
-101	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.150/3.81		RD	
-102	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.675/17.15		SQ	
-103	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.105/2.67		RD	
-104	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.150/3.81		RD	
66506-105	2 X 25	D	2.78/70.6	2.72/69.1	2.400/60.96	.675/17.15	15u"/0.38u Au OVER 50u/1.27u Ni	SQ	NOTE 2

REVISIONS				SHEET INDEX	ISSUE SH NO.
REV	ECN/DDR#	BY	DATE		
T					

TOLERANCES UNLESS OTHERWISE SPECIFIED				SHEET INDEX	ISSUE SH NO.
LINEAR	ANGLES	PRODUCT FAMILY	CAGE CODE		
0.002 01 / 0.2 3	0.002 05 / 0.002 13	00002 0020 / 0002 051	22526		
	0.002 05 / 0.002 13				

BERG ELECTRONICS				SHEET INDEX	ISSUE SH NO.
REV	ECN/DDR#	BY	DATE		
T					

NOTE: THIS DOCUMENT IS THE PROPERTY OF AND EMBODIES PROPRIETARY INFORMATION OF BERG ELECTRONICS, INC. NO PART OF THE INFORMATION SHOWN ON THIS DOCUMENT MAY BE USED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF BERG ELECTRONICS, INC. FORM E-3067 REV 8/93

PRODUCT NUMBER	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING	PIN TYPE	PLASTIC MATERIAL
NOTE 8 & 9									
66506-106	2 X 30	D	3.28/83.3	3.22/81.8	2.900/73.66	.105/2.67	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	NOTE 2
-107	2 X 30	D	3.28/83.3	3.22/81.8	2.900/73.66	.150/3.81	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	
-108	2 X 30	D	3.28/83.3	3.22/81.8	2.900/73.66	.675/17.15	15u"/0.38u Au OVER 50u"/1.27u Ni	SO	
-109	2 X 5	B	.78/19.8	.72/18.3	.400/10.16	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-110						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-111						.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SO	
-112						.105/2.67	150u"/3.81u TIN	SO	
-113						.150/3.81	150u"/3.81u TIN	SO	
-114						.675/17.15	150u"/3.81u TIN	SO	
-115						.105/2.67	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	
-116						.150/3.81	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	
-117						.675/17.15	15u"/0.38u Au OVER 50u"/1.27u Ni	SO	
-118						.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-119						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
66506-120	2 X 5	B	.78/19.8	.72/18.3	.400/10.16	.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SO	NOTE 2
66506-121	DISCONTINUED								
THRU									
66506-216									
66506-217	2 X 12	D	1.48/37.6	1.42/36.1	1.100/27.94	.105/2.67	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	NOTE 2
-218							30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-219							30u"/0.76u GXT WITH GOLD FLASH	RD	
-220						.105/2.67	150u"/3.81u TIN	SO	
-221						.150/3.81	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	
-222							30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-223							30u"/0.76u GXT WITH GOLD FLASH	RD	
-224						.150/3.81	150u"/3.81u TIN	SO	
-225						.675/17.15	15u"/0.38u Au OVER 50u"/1.27u Ni	SO	
-226							30u"/0.76u Au OVER 50u"/1.27u Ni	SO	
-227							30u"/0.76u GXT WITH GOLD FLASH	SO	
-228	2 X 12		1.48/37.6	1.42/36.1	1.100/27.94	.675/17.15	150u"/3.81u TIN	SO	
-229	2 X 15		1.78/45.2	1.72/43.7	1.400/35.56	.105/2.67	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	
-230							30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-231							30u"/0.76u GXT WITH GOLD FLASH	RD	
-232						.105/2.67	150u"/3.81u TIN	SO	
66506-233	2 X 15	D	1.78/45.2	1.72/43.7	1.400/35.56	.150/3.81	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	NOTE 2

REVISIONS				SHEET INDEX	ISSUE				
REV	ECN/DDR#	BY	DATE		SH NO.				
X									
TOLERANCES UNLESS OTHERWISE SPECIFIED									
					000 01 / 00 3				
					0000 005 / 000 13				
					00000 0020 / 0000 051				
					000 000 22526				
					000 000 22526				
					000 000 22526				
					000 000 22526				

BERG
ELECTRONICS

HEADER QUICKIE SLIM LINE
VERTICAL 4 WALL
SCALE: 1:1 D 66506 6 of 6
FORM E-3067 REV 9/93

NOTE: THIS DOCUMENT IS THE PROPERTY OF AND CONTAINS PROPRIETARY INFORMATION OF BERG ELECTRONICS, INC. NO PART OF THE INFORMATION SHOWN ON THIS DOCUMENT MAY BE USED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF BERG ELECTRONICS, INC.

PRODUCT NUMBER	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING	PIN TYPE	PLASTIC MATERIAL
NOTE 8 & 9									
66506-307	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.097/2.46	30u"/.76u GXT WITH GOLD FLASH	SQ	NOTE 2
-308	2 X 5	B	.78/19.8	.72/18.3	.400/10.16				
-309	2 X 7	C	.98/24.9	.92/23.4	.600/15.24				
-310	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78				
-311	2 X 10		1.28/32.5	1.22/31.0	.900/22.86				
-312	2 X 12		1.48/37.6	1.42/36.1	1.100/27.94				
-313	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48				
-314	2 X 15		1.78/45.2	1.72/43.7	1.400/35.56				
-315	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64				
-316	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26				
-317	2 X 22		2.48/63.0	2.42/61.5	2.100/53.34				
-318	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96				
-319	2 X 30		3.28/83.3	3.22/81.8	2.900/73.66	.097/2.46	30u"/0.76u GXT WITH GOLD FLASH		
-320	2 X 8		1.08/27.4	1.02/25.9	.700/17.78	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni		
-321	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96		30u"/0.76u Au OVER 50u"/1.27u Ni		
-322	2 X 8		1.08/27.4	1.02/25.9	.700/17.78		50u"/1.27u Au OVER 50u"/1.27u Ni		
-323	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.105/2.67	50u"/1.27u Au OVER 50u"/1.27u Ni		NOTE 2
-324	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.120/3.05	15u"/.38u GXT WITH GOLD FLASH		NOTE 6
-325	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.150/3.81	30u"/0.76u GXT WITH GOLD FLASH		NOTE 2
-326	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.120/3.05	15u"/.38u GXT WITH GOLD FLASH		NOTE 7
-327	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.120/3.05	15u"/.38u GXT WITH GOLD FLASH		NOTE 7
-328	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.120/3.05	15u"/.38u GXT WITH GOLD FLASH		NOTE 7
-329	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.150/3.81	15u"/.38u Au OVER 50u"/1.27u Ni		NOTE 2
-330	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96		15u"/.38u Au OVER 50u"/1.27u Ni		
-331	2 X 30		3.28/83.3	3.22/81.8	2.900/73.66		15u"/.38u Au OVER 50u"/1.27u Ni		
-332	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64		15u"/.38u Au OVER 50u"/1.27u Ni		
-333	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.150/3.81	30u"/0.76u GXT WITH GOLD FLASH	SQ	
-334	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.105/2.67	15u"/.38u GXT WITH GOLD FLASH	RD	NOTE 2
-335	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.105/2.67	30u"/0.76u GXT WITH GOLD FLASH	RD	NOTE 6
-336	2 X 22		2.48/63.0	2.42/61.5	2.100/53.34	.105/2.67	30u"/0.76u GXT WITH GOLD FLASH	RD	NOTE 6
-337	2 X 12	D	1.48/37.6	1.42/36.1	1.100/27.94	.150/3.81	15u"/.38u Au OVER 50u"/1.27u Ni	SQ	NOTE 2
-338	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.150/3.81	15u"/.38u Au OVER 50u"/1.27u Ni	SQ	NOTE 2
-339	2 X 4	A	.68/17.3	.62/15.8	.300/7.62	.105/2.67	15u"/.38u GXT WITH GOLD FLASH	SQ	NOTE 2
66506-340	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86	.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	NOTE 2

REVISIONS				SHEET INDEX	ISSUE									
REV	ECN/DDR#	BY	DATE		SH NO.									
Y														

BERG ELECTRONICS			
HEADER QUICKIE SLIM LINE VERTICAL 4 WALL			
DATE	1/27/95	CUSTOMER	COPIES
BY	M.SMYK	1/27/95	
CHK	J.ROMBERGER	1/27/95	
APP	M.SMYK	1/27/95	
SCALE	1:1	SIZE	D
DRG NO.	66506	SHEET	8 OF

NOTE: THIS DOCUMENT IS THE PROPERTY OF AND EMBODIES PROPRIETARY INFORMATION OF BERG ELECTRONICS, INC. NO PART OF THE INFORMATION SHOWN ON THIS DOCUMENT MAY BE USED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF BERG ELECTRONICS, INC.

FORM E-5067 REV 8/93

PRODUCT NUMBER	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING	PIN TYPE	PLASTIC MATERIAL
NOTE 8 & 9									
66506-341	2 X 17	D	1.98/50.3	1.92/48.8	1.600/40.64	.150/3.81	30u"/.76u Au/50u"/1.27u Ni	SQ	NOTE 2
-342	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86	.150/3.81	15u"/.38u GXT	SQ	NOTE 2
-343	2 X 17	D	1.98/50.3	1.92/48.8	1.600/40.64	.150/3.81	15u"/.38u GXT	SQ	NOTE 2
-344	UNASSIGNED								
-345	2 X 20	D	2.28/57.9	2.22/56.4	1.900/48.26	.120/3.05	15u"/.38u GXT WITH GOLD FLASH	SQ	NOTE 7
-346	UNASSIGNED								
-347	UNASSIGNED								
-348	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.105/2.67	15u/.38u GXT WITH GOLD FLASH	SQ	NOTE 2
-349	2 X 7	C	.98/24.9	.92/23.4	.600/15.24				
-350	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78				
-351	2 X 10		1.28/32.5	1.22/31.0	.900/22.86				
-352	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48				
-353	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64				
-354	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26				
-355	2 X 22		2.48/63.0	2.42/61.5	2.100/53.34				
-356	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96				
-357	2 X 30		3.28/83.3	3.22/81.8	2.900/73.66	.105/2.67	15u/.38u GXT WITH GOLD FLASH		
-358	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.150/3.81	30u"/.76u GXT /50u"/1.27u Ni		
-359	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.150/3.81	30u"/.76u GXT /50u"/1.27u Ni		NOTE 2
-360	2 X 12	D	1.48/37.6	1.42/36.1	1.100/27.94	.295/7.49	15u/.38u GXT WITH GOLD FLASH		NOTE 7
-361	2 X 5	E	.78/19.8	.72/18.3	.400/10.16	.105/2.67	15u/.38u GXT WITH GOLD FLASH		
-362	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.105/2.67	30u/.76u GXT WITH GOLD FLASH		NOTE 2
-363	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.105/2.67			
-364	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86	.105/2.67			
-365	2 X 15	D	1.78/45.2	1.72/43.7	1.400/35.56	.105/2.67			
-366	2 X 17	D	1.98/50.3	1.92/48.8	1.600/40.64	.105/2.67			
-367	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.150/3.81			
-368	2 X 17	D	1.98/50.3	1.92/48.8	1.600/40.64	.150/3.81			
66506-369	2 X 25	D	2.78/70.6	2.72/69.1	2.400/60.96	.150/3.81	30u/.76u GXT WITH GOLD FLASH	SQ	NOTE 2

SEE NOTE 11
SEE NOTE 11

REVISIONS				SHEET INDEX	ISSUE SH NO.					MAT	DR L.SANDERS	DATE 1/26/95	CUSTOMER COPY	TITLE HEADER QUICKIE SLIM LINE VERTICAL 4 WALL								
REV	ECN/DDR#	BY	DATE																			
AE																						
				TOLERANCES UNLESS OTHERWISE SPECIFIED				FINISH				ENGR M.SMYK 1/26/95		THIRD ANGLE PROJ								
				LINEAR .002±.01 / .01±.3				PRODUCT FAMILY				CHK J.ROMBERGER 1/26/95										
				.0002±.0020 / .0002±.051				PAGE CODE 22526				APPD M.SMYK 1/26/95										
				ANGLES 0± Z																		
 <table border="1"> <tr> <td>SCALE</td> <td>SIZE</td> <td>DWG. NO.</td> <td>SHEET</td> </tr> <tr> <td>1:1</td> <td>D</td> <td>66506</td> <td>9 of 9</td> </tr> </table>															SCALE	SIZE	DWG. NO.	SHEET	1:1	D	66506	9 of 9
SCALE	SIZE	DWG. NO.	SHEET																			
1:1	D	66506	9 of 9																			

NOTE: THIS DOCUMENT IS THE PROPERTY OF AND EMBODIES PROPRIETARY INFORMATION OF BERG ELECTRONICS, INC. NO PART OF THE INFORMATION SHOWN ON THIS DOCUMENT MAY BE USED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF BERG ELECTRONICS, INC. FORM E-3067 REV 8/93