


40Amp Schottky Rectifier FST40180 — FST40200

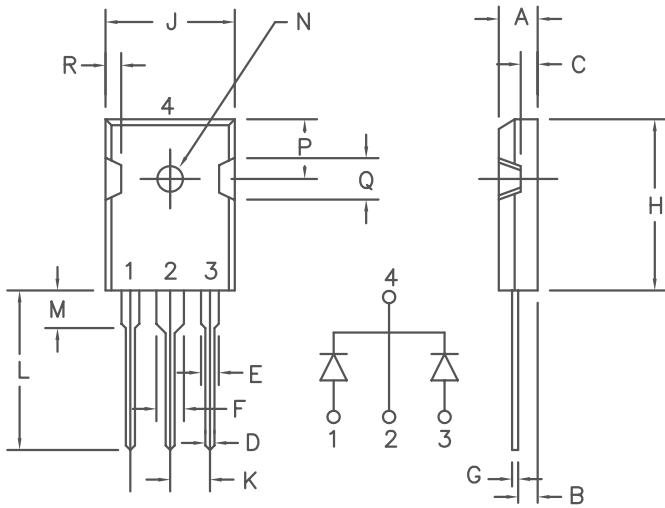

Similar to TO-247AD

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.185	.209	4.70	5.31	
B	.087	.102	2.21	2.59	
C	.059	.098	1.50	2.49	
D	.040	.055	1.02	1.40	
E	.079	.094	2.01	2.39	
F	.118	.133	3.00	3.38	
G	.016	.031	.410	0.78	
H	.819	.883	20.80	22.4	
J	.627	.650	15.93	16.5	
K	.215	—	5.46	—	Typ.
L	.790	.810	20.07	20.6	
M	.157	.180	3.99	4.57	
N	.139	.144	3.53	3.66	Dia.
P	.255	.300	6.48	7.62	
Q	.170	.210	4.32	5.33	
R	.080	.110	2.03	2.79	

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST40180		180V	180V
FST40200		200V	200V

- Schottky Barrier Rectifier
- 2 X 20 Amperes Avg.
- 175°C Junction Temperature
- V_{RRM} 180V to 200V

Electrical Characteristics		
Average Forward Current per pkg.	$I_{F(AV)}$ 40Amps	$T_C = 144^\circ\text{C}$, Square wave
Average Forward Current per leg	$I_{F(AV)}$ 20Amps	$T_C = 144^\circ\text{C}$, Square wave
Maximum Surge Current per leg	I_{FSM} 250Amps	8.3ms, half sine, $T_J = 175^\circ\text{C}$
Max. Peak Forward Voltage per leg	V_{FM} .86 Volts	$I_{FM} = 20\text{A}$, $T_J = 25^\circ\text{C}^*$
Typical Peak Forward Voltage per leg	V_{FM} .70 Volts	$I_{FM} = 20\text{A}$, $T_J = 125^\circ\text{C}^*$
Typ. Peak Reverse Current per leg	I_{RM} 250uA	V_{RRM} , $T_J = 125^\circ\text{C}^*$
Max. Peak Reverse Current per leg	I_{RM} 100uA	V_{RRM} , $T_J = 25^\circ\text{C}$
Typical Junction Capacitance per leg	C_J 310pF	$V_R = 5.0\text{V}$, $T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics		
Storage temp range	T_{STG}	-55°C to 175°C
Operating junction temp range	T_J	-55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	1.8°C/W
Max thermal resistance per pkg.	$R_{\theta JC}$	0.9°C/W
Typical thermal resistance (greased)	$R_{\theta CS}$	0.25°C/W case to sink
Mounting Torque		8–10 inch pounds maximum (6# screw)
Weight		.22 ounces (6.36 grams) typical

FST40180 — FST40200

Figure 1
Typical Forward Characteristics — Per Leg

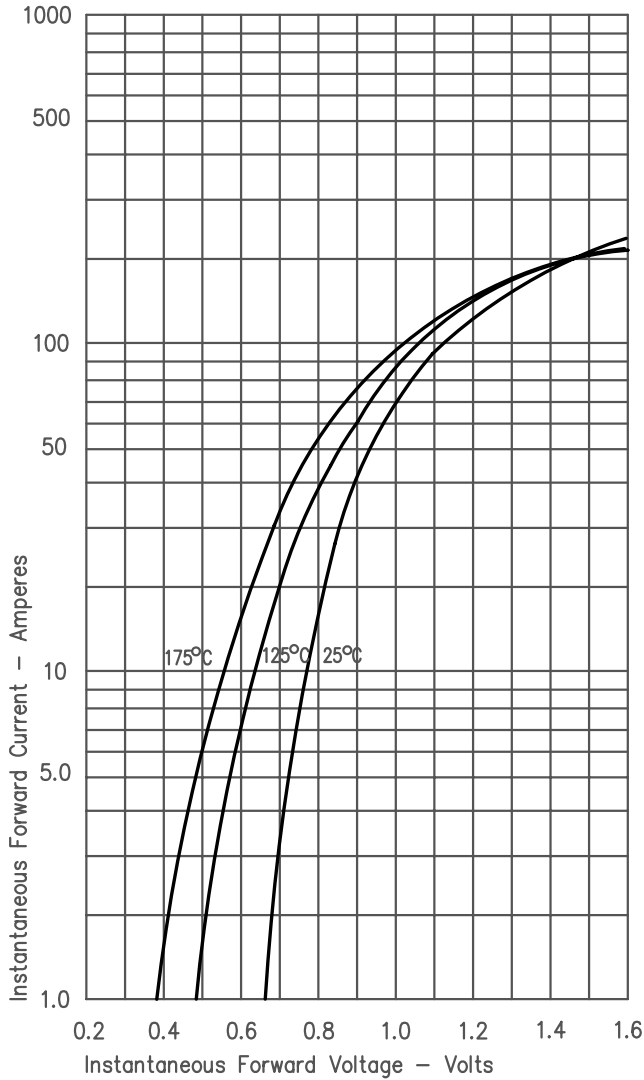


Figure 3
Typical Junction Capacitance — Per Leg

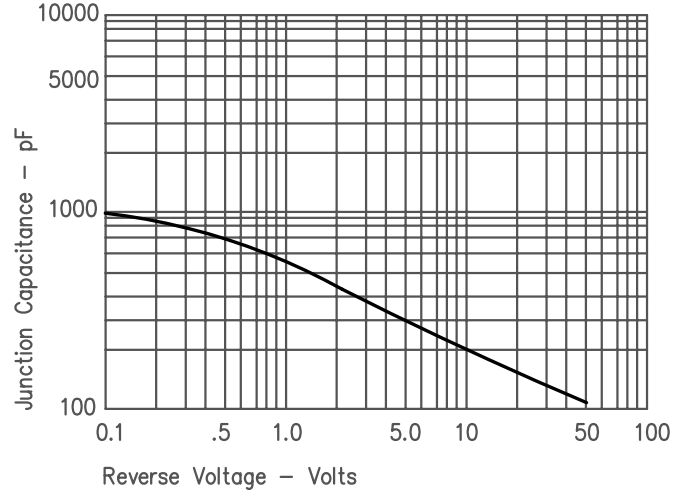


Figure 4
Forward Current Derating — Per Leg

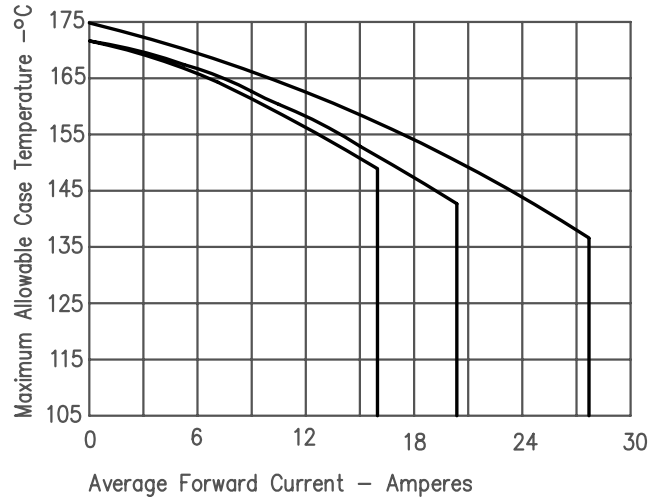


Figure 2
Typical Reverse Characteristics — Per Leg

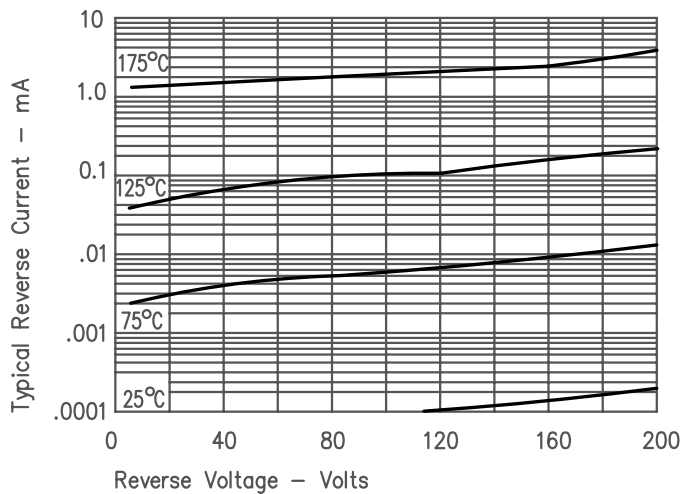


Figure 5
Maximum Forward Power Dissipation — Per Leg

