

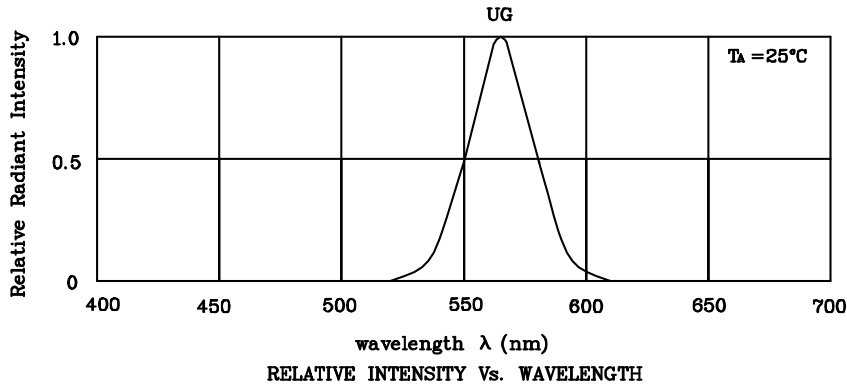
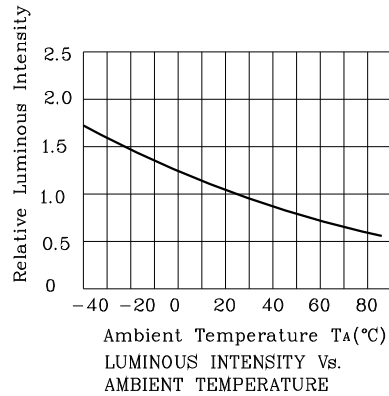
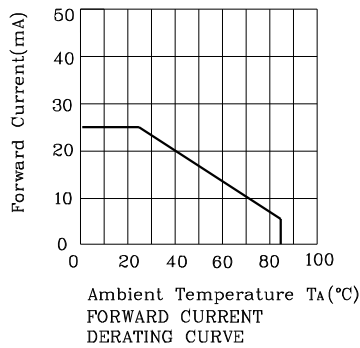






Part Number	Emitting Color	Emitting Material	Luminous Intensity (IF=10mA) ucd		Wavelength nm λ P	Description
			min.	typ.		
AUG60A	Green	GaP	1900	10490	565	Common Anode, Rt. Hand Decimal







❖ UG



Note: the curves are on the segment a1, a2, d1, d2, p, k.

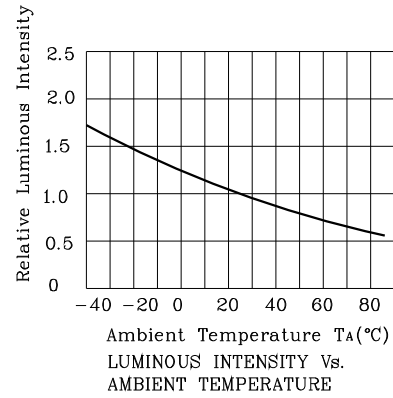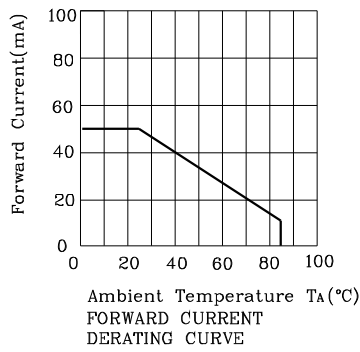


Note:the curves are on the segment b,c,e,f,g,h,j,l,m,n.

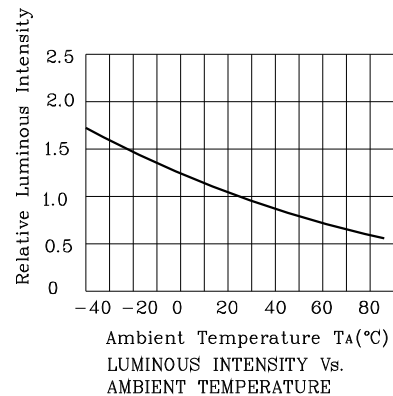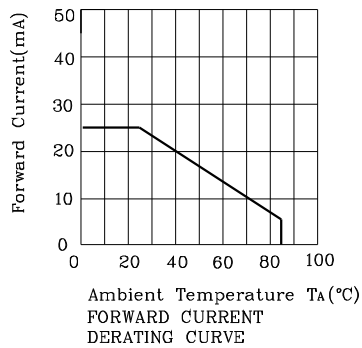

Note:the curves are on the DP.

Wave Soldering Profile For Lead-free Through-hole LED.

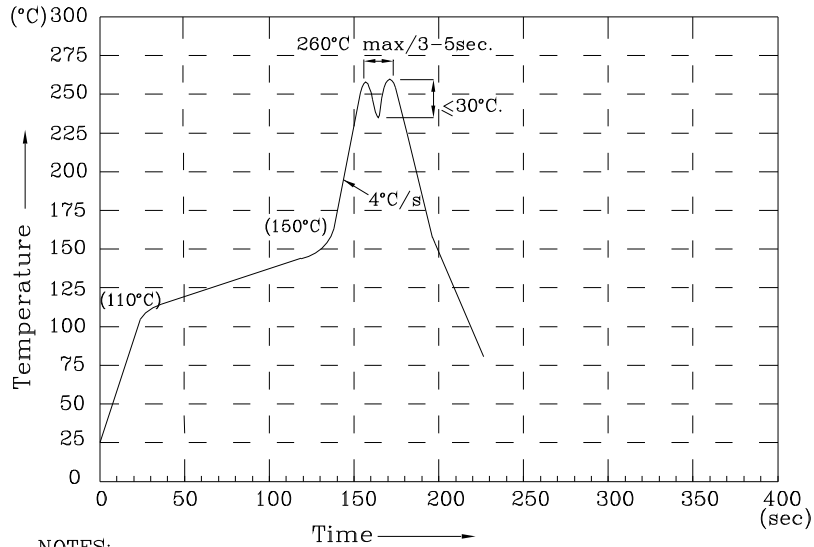

NOTES:

1. Recommend the wave temperature 245°C~260°C. The maximum soldering temperature should be less than 260°C.
2. Do not apply stress on epoxy resins when temperature is over 85 degree°C.
3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
4. No more than once.

Remarks:


If special sorting is required (e.g. binning based on forward voltage, luminous intensity / luminous flux or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous Intensity / Luminous Flux: +/-15%
3. Forward Voltage: +/-0.1V


Note: Accuracy may depend on the sorting parameters.

PACKING & LABEL SPECIFICATIONS

AUG60A

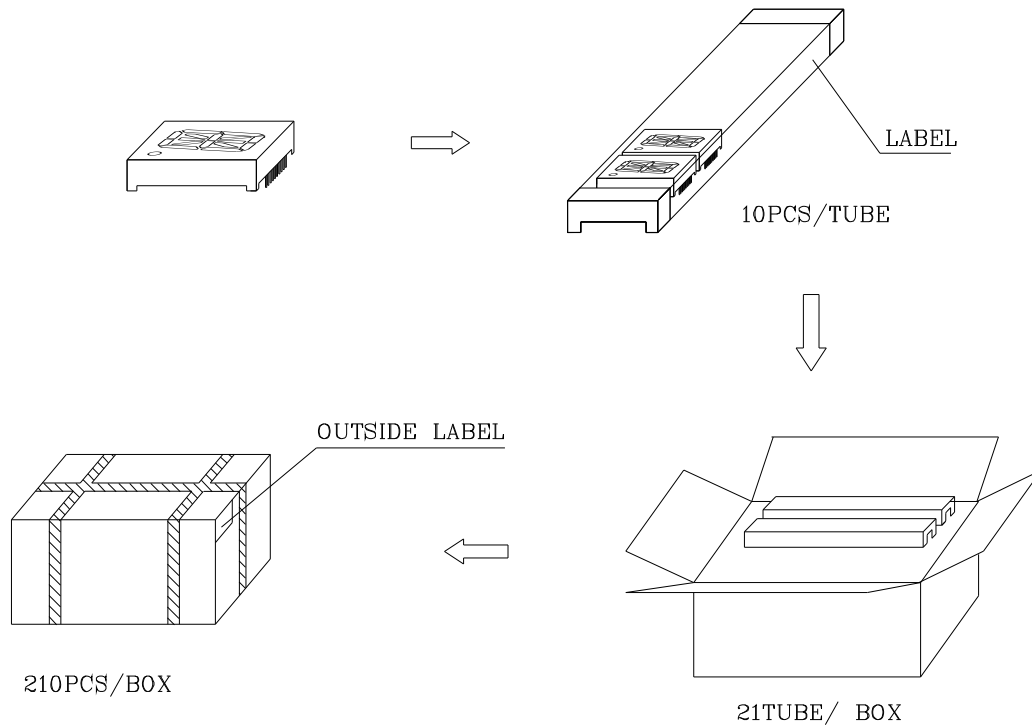

Inside LABEL Paste On The IC-tube

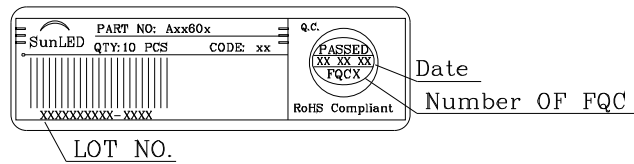

Outside LABEL Paste On The Box

