

RoHS Compliant Product

A suffix of "-C" specifies halogen-free




## FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability
- \* Good for switching mode application

## MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 1.10 grams

DO-27

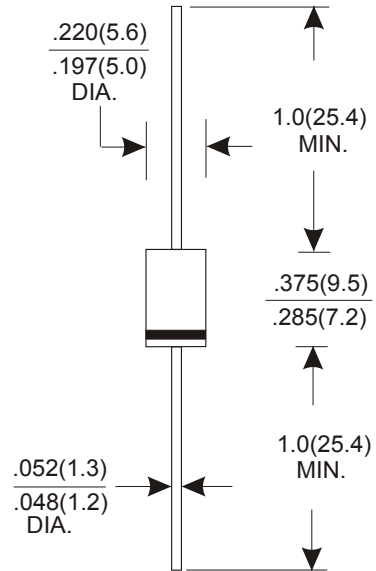

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.


TYPE NUMBER	SF31	SF32	SF33	SF34	SF35	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	V
Maximum RMS Voltage	35	70	105	140	210	V
Maximum DC Blocking Voltage	50	100	200	400	600	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at Ta=55°C	3.0					A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	75		50			A
Maximum Instantaneous Forward Voltage at 3.0A	0.95		1.30	1.70		V
Maximum DC Reverse Current at Rated DC Blocking Voltage	Ta=25°C		5.0			µA
	Ta=100°C		50			µA
Maximum Reverse Recovery Time (Note 1)	35			50		nS
Typical Junction Capacitance (Note 2)	50					pF
Operating and Storage Temperature Range T <sub>J</sub> , T <sub>STG</sub>	-65 ~ +150					°C

NOTES:


1. Reverse Recovery Time test condition: IF=0.5A, IR=1.0A, IRR=0.25A
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C

**RATING AND CHARACTERISTIC CURVES (SF31 THRU SF35)**


**FIG.1- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC**

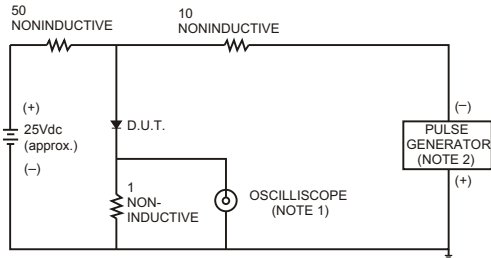


NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm, 22pF.  
2. Rise Time= 10ns max., Source Impedance= 50 ohms.

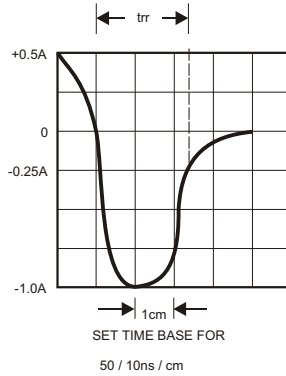


**FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE**

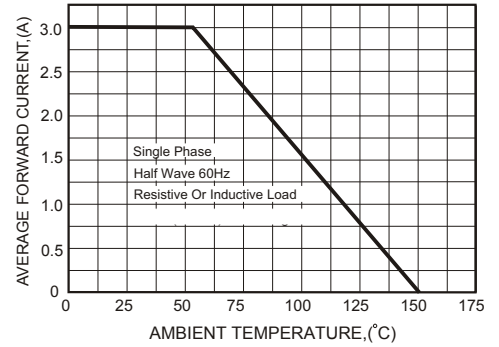


**FIG.3-TYPICAL FORWARD CHARACTERISTICS**

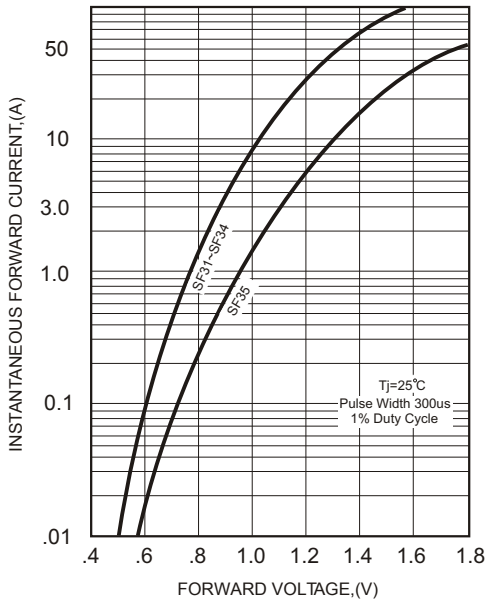

**FIG.4-TYPICAL REVERSE CHARACTERISTICS**

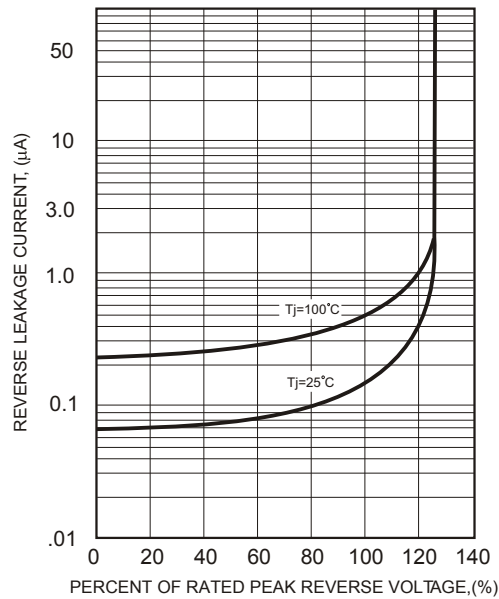

**FIG.5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

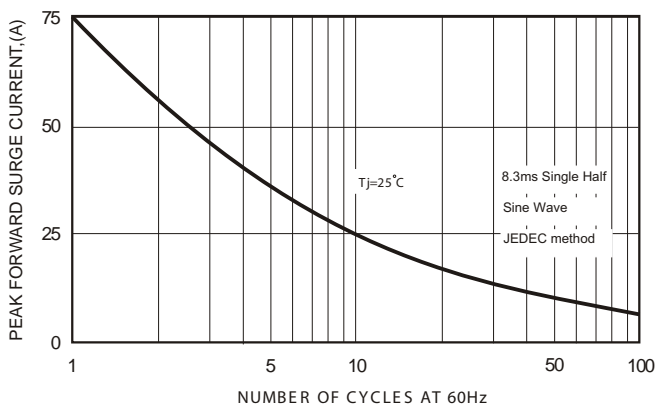

**FIG.6-TYPICAL JUNCTION CAPACITANCE**

