

**SELECTOR GUIDE**

Part Number	Dice	Lens Color / Type	Pack Size	View Angle 2θ 1/2
MTBL2410-G-A	Green	Green Clear	2 Leaded Backlight	50 °


**ELECTRICAL / OPTICAL CHARACTERISTICS AT T<sub>A</sub>=25°C**

Parameter	Symbol	Device	Min.	Typ.	Max.	Units	Test Conditions
Forward Voltage	V <sub>F</sub>	Green	-	4.2	5.2	V	20mA
Reverse Current	I <sub>R</sub>	Green	-	-	100	μA	10V
Luminous Intensity	I <sub>v</sub>	Green	13.5	25	-	mcd	20mA
Peak Wavelength	λ <sub>peak</sub>	Green	-	567	-	nm	20mA
Dominant Wavelength	λ <sub>D</sub>	Green	-	572	-	nm	20mA
Spectral Line Half-Width	Δλ <sub>1/2</sub>	Green	-	30	-	nm	20mA


**ABSOLUTE MAXIMUM RATINGS AT T<sub>A</sub>=25°C**

Parameter	Rating	Units
Forward Current ( I <sub>F</sub> )	30	mA
Power Dissipation ( P <sub>D</sub> )	156	mW
Reverse Voltage ( V <sub>R</sub> )	10	V
Operating Temperature ( T <sub>OPR</sub> )	-25 ~ +85	°C
Storage Temperature ( T <sub>STG</sub> )	-40 ~ +100	°C
Lead Solder Temperature ( T <sub>SOL</sub> )	260 @ for 5 sec. max	


1. All Dimensions Are In Millimeters (inches).
2. Tolerance Is +0.25(0.01") Unless Otherwise Noted.
3. Specifications Are Subject To Change Without Notice.

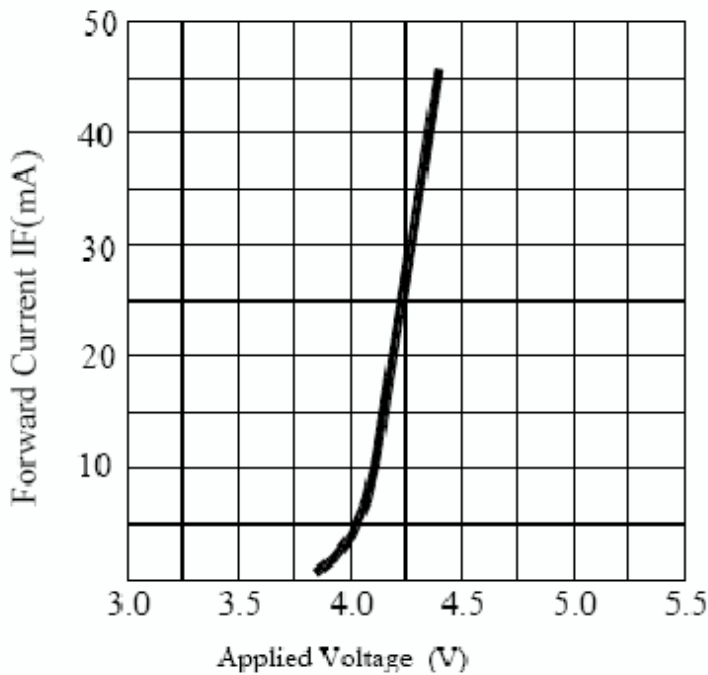


Forward Current VS. Applied Voltage

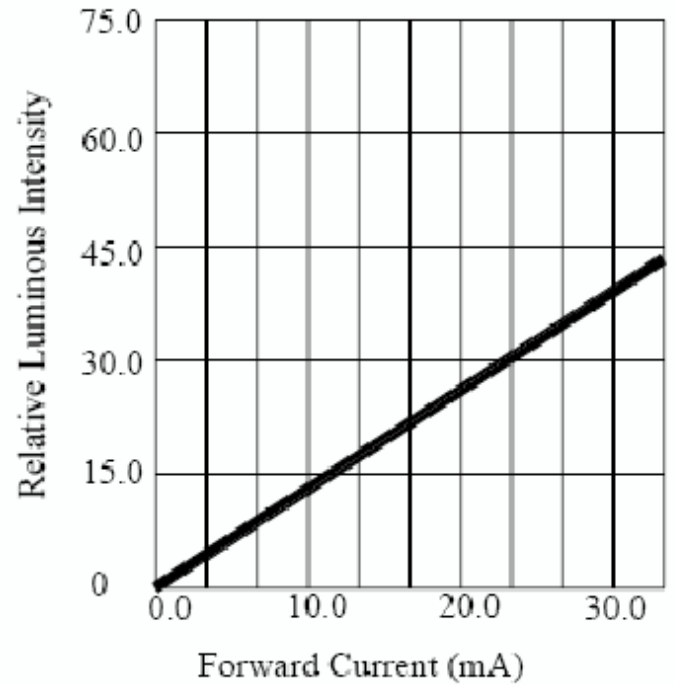

Forward Current VS. Luminous Intensity

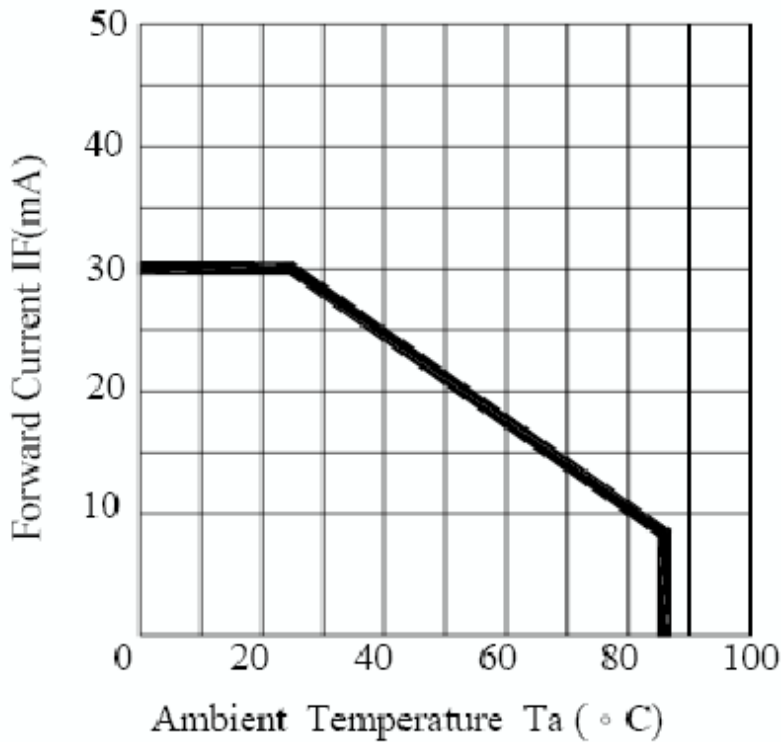

Ambient Temperature vs. Forward Current

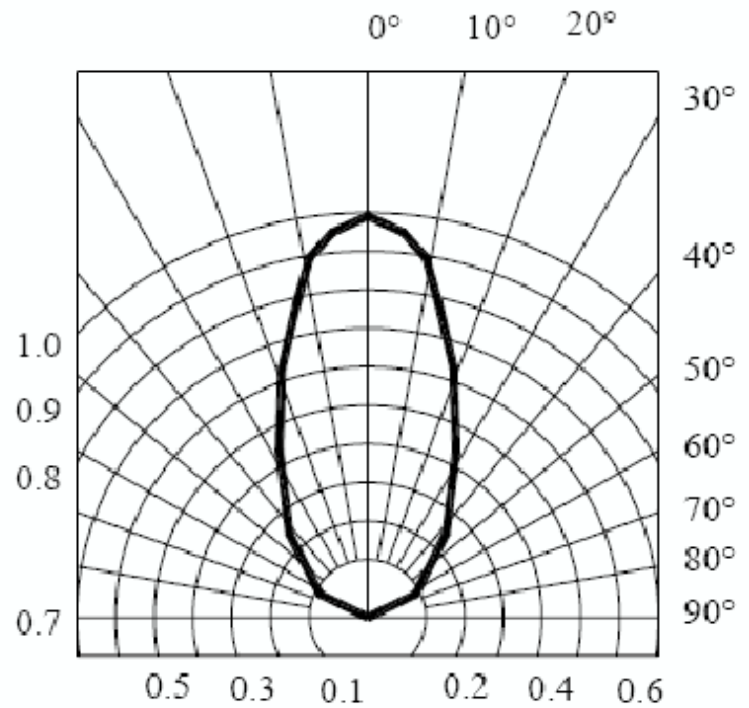

Radiation Diagram

