


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP
C	Updated Specifications	01-24-08	DP


MECHANICAL DIMENSIONS:

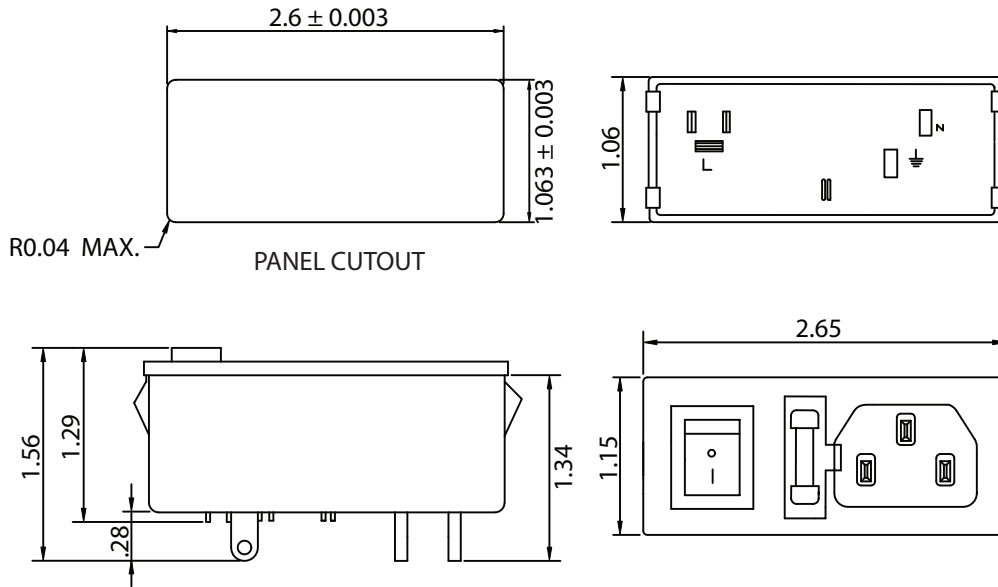

ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE RATING.....115/250VAC
- 1-2. CURRENT RATING
 - A. @ 115/250 VAC (UL, CSA)6 A RMS MAX
 - B. @ 250 VAC (SEMKO)10 A RMS MAX
- 1-3. SPST POWER SWITCH:
 - A. @ 125/250 VAC (UL, CSA).....6 A RMS MAX
 - B. @ 250V AC (SEMKO)6 A RMS MAX
- 1.4. SINGLE 5x20mm FUSEHOLDER
- 1.5. FLAMMABILITY CLASS UL94V-0
- 1.6. PLASTIC CASE
- 1.7. SNAP-IN PANEL THICKNESS: .04IN~.07IN (1.0mm~1.8mm)
- 1.8. APPROVALS: UL, CSA, SEMKO
- 1-9. RoHS COMPLIANT

ELECTRICAL SCHEMATIC:

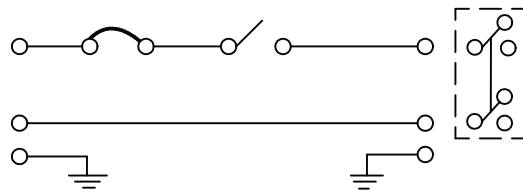

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 761-18/003	RoHS Compliant	
0-1	0.15	Description: MULTI-FUNCTION MODULE		
1-6	0.20			
6-18	0.30		UNIT: in	REV. C
18-50	0.50			
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	S.Tsai 05-04-01	05-04-01	JJH / 05-04-01
250-500	1.20			