


GSD

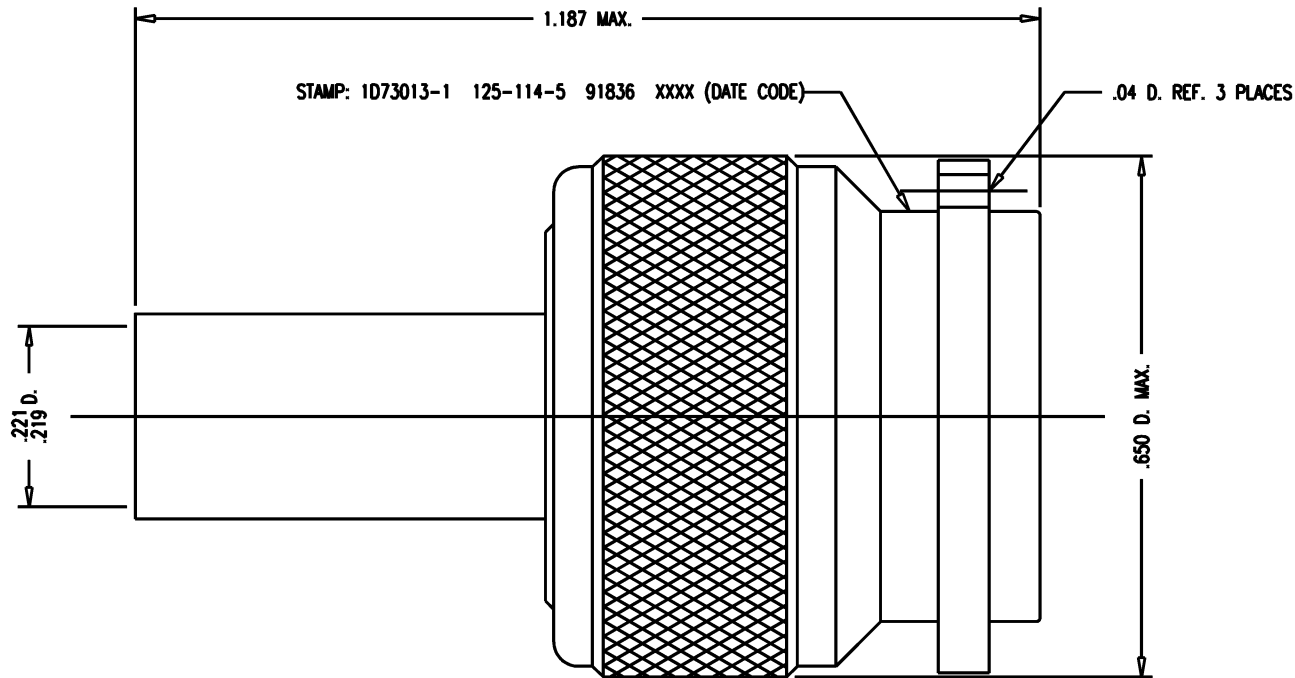

125-114-5

REVISIONS

ISSUE	CHANGES
0	ER 36775 ME 01/22/96
1	CN 37217 A KH 02/12/97
2	CN 38872 E TML 07/14/03
3	CN 39542 A DCT 7/24/6

NOTES:

- FOR USE WITH RG-142, 223 AND 400/U CABLE GROUPS.
- INTERFACE PER MIL-STD-348, FIG. 313-1.
- CENTER CONTACT (1-569-19M9D) TO BE SUPPLIED UNASSEMBLED.
- MARK PACKAGE: 1D73013-1
KINGS 91836 125-114-5
XX XX (DATE CODE)
- MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
GASKET: SILICONE RUBBER, A-A-59588, CLASS 1B
C-RING: PHOS. BRONZE, ASTM-B-103
OUTER CONTACT: BER. COPPER, ASTM-B-196
ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:
CENTER CONTACT: HARD GOLD PLATE PER ASTM-B488
ALL OTHER METAL PARTS: SILVER PLATE PER ASTM-B700
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHM.
FREQUENCY RANGE: DC TO 11 GHz
VOLTAGE RATING: 500 VOLTS RMS

SCALE: 6:1

APPROX SURFACE AREA

WAS: E-18533

USED ON

REF: McD.DOUGLAS / 1D73013-1 REV. C

PL, TNC, M

DRAWN	ME	DATE	01/22/96
DESIGN	CT	DATE	01/22/96
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

GSD

125-114-5