


### 1. CONFIGURATION & DIMENSIONS :



UNIT : mm (inch)

SIZE (VA)	L	W	H	A-6 6 PIN	B	WT. (gram)	OPTIONAL BRACKET *		
							NO.	MW	MD
1.2	35.30 (1.390)	30.00 (1.181)	30.18 (1.188)	7.93 (0.312)	25.40 (1.00)	118.72	---	---	---

### 2. SCHEMATIC :

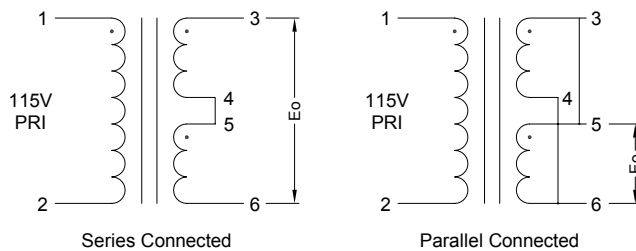

### 3. ELECTRICAL CHARACTERISTICS ( @ 25°C ) :

a. Primary Voltage	AC 115 V 60 Hz .
b. No Load Primary Current	Less Than 10mA .
c. Secondary Voltage (±5%)	Series AC - V . Parallel AC - V .
d. Secondary Load Current	Series 20mA . Parallel 40mA .
e. Full Load Primary Current	Less Than - mA .
f. Full Load Secondary Voltage (±5%)	Series 58.00V . Parallel 28.00V .
g. DC Resistance	
Pin 1-2	Primary = 690 Ohm .
Pin 3-4	Secondary = - Ohm .
Pin 5-6	= - Ohm .
h. Insulation Resistance	DC 500V 100Meg Ohm Of More .
i. Withstand Voltage (Hi-Pot)	AC 1500V 60Hz 1 Minutes .
j. Temperature Rise	Less Than 60 Deg C .
k. Core Size	EI-35 x 10.00 m/m .
l. Turns & Wire Gauge	
Primary Pin 1-2	Turns Diameter m/m
Secondary-1 Pin 3-4	Turns Diameter m/m
Secondary-2 Pin 5-6	Turns Diameter m/m



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

25.02.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**