




MULTILAYER CERAMIC CHIP CAPACITORS

C Series Commercial Grade Mid Voltage (100 to 630V)

Type:

C1005 [EIA CC0402]
C1608 [EIA CC0603]
C2012 [EIA CC0805]
C3216 [EIA CC1206]
C3225 [EIA CC1210]
C4532 [EIA CC1812]
C5750 [EIA CC2220]

Issue date:
April 2013



REMINDERS

Please read before using this product

SAFETY REMINDERS




REMINDERS

1. If you intend to use a product listed in this catalog for a purpose that may cause loss of life or other damage, you must contact our company's sales window.
2. We may modify products or discontinue production of a product listed in this catalog without prior notification.
3. We provide "Delivery Specification" that explain precautions for the specifications and safety of each product listed in this catalog. We strongly recommend that you exchange these delivery specifications with customers that use one of these products.
4. If you plan to export a product listed in this catalog, keep in mind that it may be a restricted item according to the "Foreign Exchange and Foreign Trade Control Law". In such cases, it is necessary to acquire export permission in harmony with this law.
5. Any reproduction or transferring of the contents of this catalog is prohibited without prior permission from our company.
6. We are not responsible for problems that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. We do not grant license of these rights.
7. This catalog only applies to products purchased through our company or one of our company's official agencies. This catalog does not apply to products that are purchased through other third parties.

Notice : Effective January 2013, TDK will use a new catalog part number which adds product thickness and packaging specification detail. This new part number should be referenced on all catalog orders going forward, and is not applicable for OEM part number orders. Please be aware the last five digits of the TDK catalog part number will differ from the TDK item description (internal control number) on the product label. Contact your local TDK Sales representative for more information.

(Example)

Catalog Issued date	TDK Part Number (In Catalog)	TDK Item Description (On Delivery Label)
Prior to January 2013	C1608C0G1E103J	C1608C0G1E103JT000N
January 2013 and Later	C1608C0G1E103J080AA	C1608C0G1E103JT000N

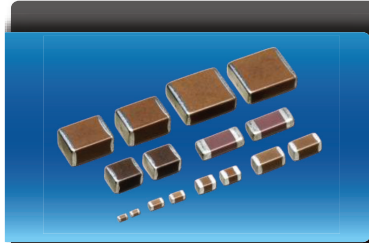

C Series Mid Voltage (100 to 630V)

Type: C1005 [EIA CC0402], C1608 [EIA CC0603], C2012 [EIA CC0805], C3216 [EIA CC1206], C3225 [EIA CC1210], C4532 [EIA CC1812], C5750 [EIA CC2220]



Features




- Voltage rating of 100V to 630V with capacitance range up to 15 μ F.
- High capacitance has been achieved through precision technologies that enable the use of multiple thinner ceramic dielectric layers.
- Low residual inductance assures superior frequency characteristics.
- Excellent DC Bias properties.
- A lineup with wide-ranging rated voltages that enables selections that are suitable for needs.

Applications



- Snubber in power supply
- Electric flash circuits in digital still camera
- Power factor improvement
- Input-output filter in power supply
- Driver circuit in plasma display
- Noise bypass

Shape & Dimensions



L	Body Length
W	Body Width
T	Body Height
B	Terminal Width
G	Terminal Spacing



Part Number Construction

C • **3225** • **X7R** • **2A** • **105** • **K** • **200** • **A** • **A**

Series Name

Dimensions L x W (mm)

Code	Length	Width	Terminal
C1005	1.00 ± 0.05	0.50 ± 0.05	0.10 min.
C1608	1.60 ± 0.10	0.80 ± 0.10	0.20 min.
C2012	2.00 ± 0.20	1.25 ± 0.20	0.20 min.
C3216	3.20 ± 0.20	1.60 ± 0.20	0.20 min.
C3225	3.20 ± 0.40	2.50 ± 0.30	0.20 min.
C4532	4.50 ± 0.40	3.20 ± 0.40	0.20 min.
C5750	5.70 ± 0.40	5.00 ± 0.40	0.20 min.

*Dimension tolerance are typical values

Temperature Characteristics

Temperature Characteristics	Capacitance Change	Temperature Range	Rated Voltage (DC) Code	Rated Voltage (DC) Voltage (DC)
CH	0±60 ppm/°C	-25 to +85°C	2A	100V
C0G	0±30 ppm/°C	-55 to +125°C	2E	250V
JB	±10%	-25 to +85°C	2V	350V
X5R	±15%	-55 to +85°C	2W	450V
X6S	±22%	-55 to +105°C	2J	630V
X7R	±15%	-55 to +125°C		
X7S	±22%	-55 to +125°C		
X7T	+22/-33%	-55 to +125°C		

Nominal Capacitance (pF)

The capacitance is expressed in three digit codes and in units of pico Farads (pF). The first and second digits identify the first and second significant figures of the capacitance. The third digit identifies the multiplier. R designates a decimal point.
Ex. 0R2 = 0.2pF; 103 = 10,000pF; 105 = 1,000,000pF = 100nF

Capacitance Tolerance

Code	Tolerance
C	± 0.25pF
D	± 0.50pF
F	± 1%
G	± 2%
J	± 5%
K	± 10%
M	± 20%

Nominal Thickness

Code	Thickness	Code	Thickness
050	0.50 mm	130	1.30 mm
060	0.60 mm	160	1.60 mm
080	0.80 mm	200	2.00 mm
085	0.85 mm	230	2.30 mm
115	1.15 mm	250	2.50 mm
125	1.25 mm	280	2.80 mm
		320	3.20 mm

Packaging Style

Code	Style
A	178" Reel, 4mm Pitch
B	178" Reel, 2mm Pitch
K	178" Reel, 8mm Pitch

Special Reserved Code

Code	Description
A, B, C	TDK Internal Code



Capacitance Range Chart

EIA CC0402 [C1005]

Capacitance Range Chart

Temperature Characteristics: X7S ($\pm 22\%$)
 Rated Voltage: 100V (2A)

Capacitance (pF)	Code	Tolerance	X7S
			2A (100V)
1,000	102	K: $\pm 10\%$ M: $\pm 20\%$	
1,500	152		
2,200	222		
3,300	332		
4,700	472		
6,800	682		
10,000	103		

Standard Thickness

0.50 mm



Capacitance Range Chart

EIA CC0603 [C1608]

Capacitance Range Chart

Temperature Characteristics: C0G (0 ± 30ppm/°C), CH (0 ± 60ppm/°C), JB (±10%), X5R (±15%), X7R (±15%), X7S (±22%)
 Rated Voltage: 250V (2E), 100V (2A)

Capacitance (pF)	Code	Tolerance	C0G		CH		JB	X5R	X7R	X7S
			2E (250V)	2A (100V)	2E (250V)	2A (100V)	2A (100V)	2A (100V)	2A (100V)	2A (100V)
1	010	C: ± 0.25pF								
1.5	1R5	D: ± 0.50pF								
2	020	F: ± 1%								
2.2	2R2	G: ± 2%								
3	030	J: ± 5%								
3.3	3R3	K: ± 10%								
4	040	M: ± 20%								
4.7	4R7									
5	050									
6	060									
6.8	6R8									
7	070									
8	080									
9	090									
10	100									
12	120									
15	150									
18	180									
22	220									
27	270									
33	330									
39	390									
47	470									
56	560									
68	680									
82	820									
100	101		█		█					
120	121									
150	151									
180	181									
220	221									
270	271									
330	331									
390	391									
470	471									
560	561									
680	681									
820	821									
1,000	102					█	█	█		
1,200	122									
1,500	152									
2,200	222									
3,300	332									
4,700	472									
6,800	682									
10,000	103									
15,000	153									
22,000	223									
33,000	333									
47,000	473									
68,000	683									
100,000	104									█

Standard Thickness
 0.80 mm




Capacitance Range Chart

EIA CC0805 [C2012]

Capacitance Range Chart

Temperature Characteristics: C0G (0 ± 30ppm/°C), CH (0 ± 60ppm/°C)
 Rated Voltage: 250V (2E), 100V (2A)

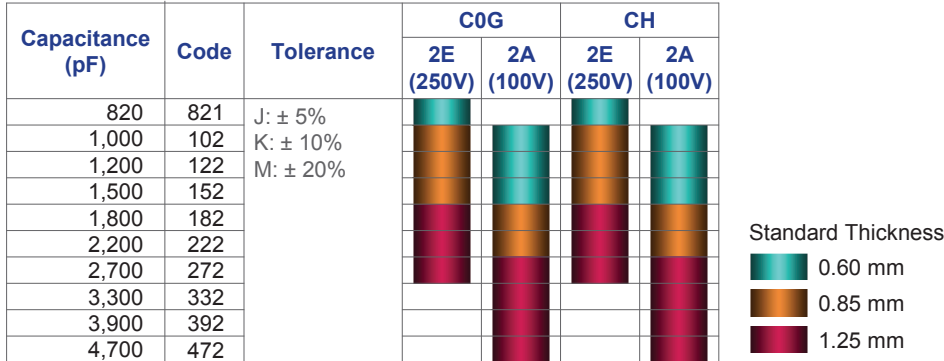

Capacitance Range Chart

Temperature Characteristics: JB (±10%), X5R (±15%), X7R (±15%), X7S (±22%), X7T (+22/-33%)
 Rated Voltage: 450V (2W), 350V (2V), 250V (2E), 100V (2A)





Capacitance Range Chart


EIA CC1206 [C3216]

Capacitance Range Chart

Temperature Characteristics: C0G (0 ± 30ppm/°C), CH (0 ± 60ppm/°C), JB (±10%), X5R (±15%), X7S (±22%)
 Rated Voltage: 630V (2J), 250V (2E), 100V (2A)

Capacitance (pF)	Code	Tolerance	C0G			CH			JB			X5R			X7S
			2J (630V)	2E (250V)	2A (100V)	2J (630V)	2E (250V)	2A (100V)	2J (630V)	2E (250V)	2A (100V)	2J (630V)	2E (250V)	2A (100V)	2A (100V)
100	101	J: ± 5%	█			█									
120	121	K: ± 10%	█			█									
150	151	M: ± 20%	█			█									
180	181		█			█									
220	221		█			█									
270	271		█			█									
330	331		█			█									
390	391		█			█									
470	471		█			█									
560	561		█			█									
680	681		█			█									
820	821		█			█									
1,000	102		█			█			█			█			
1,200	122		█			█			█			█			
1,500	152		█			█			█			█			
1,800	182		█			█			█			█			
2,200	222		█			█			█			█			
2,700	272		█			█			█			█			
3,300	332		█	█		█	█		█			█			
3,900	392		█	█		█	█		█			█			
4,700	472		█	█		█	█		█			█			
5,600	562		█	█		█	█		█			█			
6,800	682		█	█		█	█		█			█			
8,200	822		█	█		█	█		█			█			
10,000	103		█			█			█			█			
15,000	153								█	█		█			
22,000	223								█	█		█			
33,000	333								█	█		█			
47,000	473								█	█		█			
68,000	683								█	█		█			
100,000	104								█	█		█			
150,000	154								█	█		█			
220,000	224								█	█		█			
330,000	334								█	█		█			
470,000	474								█	█		█			
680,000	684								█	█		█			
1,000,000	105								█	█		█			
1,500,000	155								█	█		█			
2,200,000	225								█	█		█			
3,300,000	335								█	█		█			

Standard Thickness





Capacitance Range Chart

EIA CC1206 [C3216]

Capacitance Range Chart

Temperature Characteristics: X7R ($\pm 15\%$), X7S ($\pm 22\%$), X7T ($+22/-33\%$)
 Rated Voltage: 630V (2J), 450V (2W), 350V (2V), 250V (2E), 100V (2A)

Capacitance (pF)	Code	Tolerance	X7R			X7T				
			2J (630V)	2E (250V)	2A (100V)	2J (630V)	2W (450V)	2V (350V)	2E (250V)	
1,000	102	K: $\pm 10\%$ M: $\pm 20\%$	■							
1,500	152									
2,200	222									
3,300	332									
4,700	472									
6,800	682									
10,000	103					■				
15,000	153		■			■				
22,000	223		■	■		■				
33,000	333		■	■		■				
47,000	473				■	■				
68,000	683			■		■				
100,000	104			■			■	■		
150,000	154									■
220,000	224									■
330,000	334									■
470,000	474									■
680,000	684									■
1,000,000	105									■

Standard Thickness

- 0.85 mm
- 1.15 mm
- 1.30 mm
- 1.60 mm



Capacitance Range Chart

EIA CC1210 [C3225]

Capacitance Range Chart

Temperature Characteristics: C0G (0 ± 30ppm/°C), CH (0 ± 60ppm/°C), JB (±10%)
 Rated Voltage: 630V (2J), 250V (2E), 100V (2A)

Capacitance (pF)	Code	Tolerance	C0G			CH			JB		
			2J (630V)	2E (250V)	2A (100V)	2J (630V)	2E (250V)	2A (100V)	2J (630V)	2E (250V)	2A (100V)
3,900	392	J: ± 5%	█			█					
4,700	472	K: ± 10%	█			█					
5,600	562	M: ± 20%	█			█					
6,800	682		█			█					
8,200	822		█			█					
10,000	103		█	█		█	█				
15,000	153		█	█	█	█	█				
22,000	223		█		█	█					
33,000	333		█		█	█					
47,000	473				█			█			
68,000	683								█		
100,000	104									█	
150,000	154										█
220,000	224										█
330,000	334										█
470,000	474										█
680,000	684										█
1,000,000	105										█
1,500,000	155										█
2,200,000	225										█

Standard Thickness

- █ 1.25 mm
- █ 1.60 mm
- █ 2.00 mm
- █ 2.30 mm
- █ 2.50 mm

Capacitance Range Chart

Temperature Characteristics: : X5R (±15%), X7R (±15%), X7S (±22%), X7T (+22/-33%)
 Rated Voltage: 630V (2J), 450V (2W), 250V (2E), 100V (2A)

Capacitance (pF)	Code	Tolerance	X5R			X7R			X7S	X7T		
			2J (630V)	2E (250V)	2A (100V)	2J (630V)	2E (250V)	2A (100V)	2A (100V)	2J (630V)	2W (450V)	2E (250V)
47,000	473	K: ± 10%	█			█						
68,000	683	M: ± 20%										
100,000	104						█			█		
150,000	154			█			█					
220,000	224									█		
330,000	334										█	
470,000	474											█
680,000	684											
1,000,000	105											
1,500,000	155											
2,200,000	225											
3,300,000	335											
4,700,000	475											

Standard Thickness

- █ 1.60 mm
- █ 2.00 mm
- █ 2.30 mm



Capacitance Range Chart

EIA CC1812 [C4532]

Capacitance Range Chart

Temperature Characteristics: C0G (0 ± 30ppm/°C), CH (0 ± 60ppm/°C), JB (±10%)
 Rated Voltage: 630V (2J), 250V (2E), 100V (2A)

Capacitance (pF)	Code	Tolerance	C0G			CH			JB		
			2J (630V)	2E (250V)	2A (100V)	2J (630V)	2E (250V)	2A (100V)	2J (630V)	2E (250V)	2A (100V)
8,200	822	J: ± 5%	■			■					
10,000	103	K: ± 10%	■			■					
15,000	153	M: ± 20%	■			■					
22,000	223		■			■					
33,000	333			■			■				
47,000	473		■	■		■	■				
68,000	683								■		
100,000	104									■	
150,000	154										■
220,000	224										■
330,000	334										■
680,000	684										■
1,000,000	105										■
1,500,000	155										■
2,200,000	225										■

Standard Thickness

- 1.60 mm
- 2.00 mm
- 2.30 mm
- 2.50 mm
- 3.20 mm

Capacitance Range Chart

Temperature Characteristics: X5R (±15%), X7R (±15%), X7S (±22%), X7T(+22%/−33%)
 Rated Voltage: 630V (2J), 450V (2W), 250V (2E), 100V (2A)

Capacitance (pF)	Code	Tolerance	X5R		X7R			X7S	X7T		
			2J (630V)	2E (250V)	2J (630V)	2E (250V)	2A (100V)	2A (100V)	2J (630V)	2W (450V)	2E (250V)
68,000	683	K: ± 10%	■		■						
100,000	104	M: ± 20%	■		■						
150,000	154					■			■		
220,000	224					■			■		
300,000	304								■		
330,000	334			■		■				■	
470,000	474			■		■				■	
680,000	684										■
1,000,000	105										■
1,500,000	155										■
2,200,000	225										■
3,300,000	335										■
4,700,000	475										■

Standard Thickness

- 1.60 mm
- 2.00 mm
- 2.30 mm
- 2.50 mm



Capacitance Range Chart

EIA CC2220 [C5750]

Capacitance Range Chart

Temperature Characteristics: C0G (0 ±30ppm/°C), CH (0 ±60ppm/°C)
 Rated Voltage: 630V (2J), 2W (450V)

Capacitance (pF)	Code	Tolerance	C0G		CH	
			2J (630V)	2W (450V)	2J (630V)	2W (450V)
68,000	683	K : ± 10%	■		■	
100,000	104	J : ± 5%	■	■	■	■

Standard Thickness
 ■ 2.30 mm
 ■ 2.80 mm

Capacitance Range Chart

Temperature Characteristics: JB (±10%), X5R (±15%), X6S (±22%)
 Rated Voltage: 630V (2J), 250V (2E), 100V (2A)

Capacitance (pF)	Code	Tolerance	JB			X5R			X6S
			2J (630V)	2E (250V)	2A (100V)	2J (630V)	2E (250V)	2A (100V)	2W (450V)
150,000	154	K : ± 10%	■			■			
220,000	224	M : ± 20%	■			■			
330,000	334			■					
470,000	474			■					
680,000	684			■		■			
1,000,000	105			■		■		■	
1,500,000	155								
2,200,000	225							■	
3,300,000	335							■	
4,700,000	475							■	

Standard Thickness
 ■ 1.60 mm
 ■ 2.30 mm
 ■ 2.50 mm

Capacitance Range Chart

Temperature Characteristics: X7R (±15%), X7S (±22%), X7T (+22/-33%)
 Rated Voltage: 630V (2J), 450V (2W), 250V (2E), 100V (2A)

Capacitance (pF)	Code	Tolerance	X7R			X7S	X7T		
			2J (630V)	2E (250V)	2A (100V)	2A (100V)	2J (630V)	2W (450V)	2E (250V)
150,000	154	K : ± 10%	■						
220,000	224	M : ± 20%	■						
330,000	334			■			■		
470,000	474			■					
680,000	684			■					
1,000,000	105			■				■	
1,500,000	155								
2,200,000	225							■	
3,300,000	335							■	
4,700,000	475							■	
6,800,000	685							■	
10,000,000	106							■	
15,000,000	156							■	

Standard Thickness
 ■ 1.60 mm
 ■ 2.00 mm
 ■ 2.30 mm
 ■ 2.50 mm



Capacitance Range Table

Class 1 (Temperature Compensating)

Temperature Characteristics: C0G (-55 to +125°C, 0±30 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
1 pF	1608	0.80 ± 0.10	± 0.25pF			C1608C0G2A010C080AA
1.5 pF	1608	0.80 ± 0.10	± 0.25pF			C1608C0G2A1R5C080AA
2 pF	1608	0.80 ± 0.10	± 0.25pF			C1608C0G2A020C080AA
2.2 pF	1608	0.80 ± 0.10	± 0.25pF			C1608C0G2A2R2C080AA
3 pF	1608	0.80 ± 0.10	± 0.25pF			C1608C0G2A030C080AA
3.3 pF	1608	0.80 ± 0.10	± 0.25pF			C1608C0G2A3R3C080AA
4 pF	1608	0.80 ± 0.10	± 0.25pF			C1608C0G2A040C080AA
4.7 pF	1608	0.80 ± 0.10	± 0.25pF			C1608C0G2A4R7C080AA
5 pF	1608	0.80 ± 0.10	± 0.25pF			C1608C0G2A050C080AA
6 pF	1608	0.80 ± 0.10	± 0.50pF			C1608C0G2A060D080AA
6.8 pF	1608	0.80 ± 0.10	± 0.50pF			C1608C0G2A6R8D080AA
7 pF	1608	0.80 ± 0.10	± 0.50pF			C1608C0G2A070D080AA
8 pF	1608	0.80 ± 0.10	± 0.50pF			C1608C0G2A080D080AA
9 pF	1608	0.80 ± 0.10	± 0.50pF			C1608C0G2A090D080AA
10 pF	1608	0.80 ± 0.10	± 0.50pF			C1608C0G2A100D080AA
12 pF	1608	0.80 ± 0.10	± 5%			C1608C0G2A120J080AA
15 pF	1608	0.80 ± 0.10	± 5%			C1608C0G2A150J080AA
18 pF	1608	0.80 ± 0.10	± 5%			C1608C0G2A180J080AA
22 pF	1608	0.80 ± 0.10	± 5%			C1608C0G2A220J080AA
27 pF	1608	0.80 ± 0.10	± 5%			C1608C0G2A270J080AA
33 pF	1608	0.80 ± 0.10	± 5%			C1608C0G2A330J080AA
39 pF	1608	0.80 ± 0.10	± 5%			C1608C0G2A390J080AA
47 pF	1608	0.80 ± 0.10	± 5%			C1608C0G2A470J080AA
56 pF	1608	0.80 ± 0.10	± 5%			C1608C0G2A560J080AA
68 pF	1608	0.80 ± 0.10	± 5%			C1608C0G2A680J080AA
82 pF	1608	0.80 ± 0.10	± 5%			C1608C0G2A820J080AA
100 pF	1608	0.80 ± 0.10	± 10%		C1608C0G2E101K080AA	C1608C0G2A101K080AA
			± 5%		C1608C0G2E101J080AA	C1608C0G2A101J080AA
			± 2%			C1608C0G2A101G080AA
			± 1%			C1608C0G2A101F080AA
3216	0.60 ± 0.15	± 10%	C3216C0G2J101K060AA			
		± 5%	C3216C0G2J101J060AA			
120 pF	1608	0.80 ± 0.10	± 10%		C1608C0G2E121K080AA	C1608C0G2A121K080AA
			± 5%		C1608C0G2E121J080AA	C1608C0G2A121J080AA
	3216	0.60 ± 0.15	± 10%	C3216C0G2J121K060AA		
			± 5%	C3216C0G2J121J060AA		
150 pF	1608	0.80 ± 0.10	± 10%		C1608C0G2E151K080AA	C1608C0G2A151K080AA
			± 5%		C1608C0G2E151J080AA	C1608C0G2A151J080AA
	3216	0.60 ± 0.15	± 10%	C3216C0G2J151K060AA		
			± 5%	C3216C0G2J151J060AA		
180 pF	1608	0.80 ± 0.10	± 10%		C1608C0G2E181K080AA	C1608C0G2A181K080AA
			± 5%		C1608C0G2E181J080AA	C1608C0G2A181J080AA
	3216	0.60 ± 0.15	± 10%	C3216C0G2J181K060AA		
			± 5%	C3216C0G2J181J060AA		
220 pF	1608	0.80 ± 0.10	± 10%		C1608C0G2E221K080AA	C1608C0G2A221K080AA
			± 5%		C1608C0G2E221J080AA	C1608C0G2A221J080AA
	3216	0.60 ± 0.15	± 10%	C3216C0G2J221K060AA		
			± 5%	C3216C0G2J221J060AA		
270 pF	1608	0.80 ± 0.10	± 10%		C1608C0G2E271K080AA	C1608C0G2A271K080AA
			± 5%		C1608C0G2E271J080AA	C1608C0G2A271J080AA
	3216	0.60 ± 0.15	± 10%	C3216C0G2J271K060AA		
			± 5%	C3216C0G2J271J060AA		
330 pF	1608	0.80 ± 0.10	± 10%		C1608C0G2E331K080AA	C1608C0G2A331K080AA
			± 5%		C1608C0G2E331J080AA	C1608C0G2A331J080AA
	3216	0.60 ± 0.15	± 10%	C3216C0G2J331K060AA		
			± 5%	C3216C0G2J331J060AA		
390 pF	1608	0.80 ± 0.10	± 10%		C1608C0G2E391K080AA	C1608C0G2A391K080AA
			± 5%		C1608C0G2E391J080AA	C1608C0G2A391J080AA
	3216	0.60 ± 0.15	± 10%	C3216C0G2J391K060AA		
			± 5%	C3216C0G2J391J060AA		



Capacitance Range Table

Class 1 (Temperature Compensating)

Temperature Characteristics: C0G (-55 to +125°C, 0±30 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
470 pF	1608	0.80 ± 0.10	± 10%		C1608C0G2E471K080AA	C1608C0G2A471K080AA
			± 5%		C1608C0G2E471J080AA	C1608C0G2A471J080AA
	3216	0.85 ± 0.15	± 10%	C3216C0G2J471K085AA		
			± 5%	C3216C0G2J471J085AA		
560 pF	1608	0.80 ± 0.10	± 10%		C1608C0G2E561K080AA	C1608C0G2A561K080AA
			± 5%		C1608C0G2E561J080AA	C1608C0G2A561J080AA
	3216	0.85 ± 0.15	± 10%	C3216C0G2J561K085AA		
			± 5%	C3216C0G2J561J085AA		
680 pF	1608	0.80 ± 0.10	± 10%		C1608C0G2E681K080AA	C1608C0G2A681K080AA
			± 5%		C1608C0G2E681J080AA	C1608C0G2A681J080AA
	3216	0.85 ± 0.15	± 10%	C3216C0G2J681K085AA		
			± 5%	C3216C0G2J681J085AA		
820 pF	1608	0.80 ± 0.10	± 10%			C1608C0G2A821K080AA
			± 5%			C1608C0G2A821J080AA
	2012	0.60 ± 0.15	± 10%		C2012C0G2E821K060AA	
			± 5%		C2012C0G2E821J060AA	
3216	0.85 ± 0.15	± 10%	C3216C0G2J821K085AA			
		± 5%	C3216C0G2J821J085AA			
1 nF	1608	0.80 ± 0.10	± 10%			C1608C0G2A102K080AA
			± 5%			C1608C0G2A102J080AA
	2012	0.60 ± 0.15	± 10%			C1608C0G2A102F080AA
			± 5%			C2012C0G2A102J060AA
3216	0.85 ± 0.15	± 10%	C3216C0G2J102K085AA			
		± 5%	C3216C0G2J102J085AA			
1.2 nF	1608	0.80 ± 0.10	± 10%			C1608C0G2A122K080AA
			± 5%			C1608C0G2A122J080AA
	2012	0.60 ± 0.15	± 10%		C2012C0G2E122K085AA	
			± 5%		C2012C0G2E122J085AA	
3216	0.85 ± 0.15	± 10%	C3216C0G2J122K085AA			
		± 5%	C3216C0G2J122J085AA			
1.5 nF	2012	0.60 ± 0.15	± 10%			C2012C0G2A152K060AA
			± 5%			C2012C0G2A152J060AA
	3216	0.85 ± 0.15	± 10%		C2012C0G2E152K085AA	
			± 5%		C2012C0G2E152J085AA	
1.8 nF	2012	0.85 ± 0.15	± 10%			C2012C0G2A182K085AA
			± 5%			C2012C0G2A182J085AA
	3216	1.15 ± 0.15	± 10%		C2012C0G2E182K125AA	
			± 5%		C2012C0G2E182J125AA	
2.2 nF	2012	0.85 ± 0.15	± 10%			C2012C0G2A222K085AA
			± 5%			C2012C0G2A222J085AA
	3216	1.15 ± 0.15	± 10%		C2012C0G2E222K125AA	
			± 5%		C2012C0G2E222J125AA	
2.7 nF	2012	1.25 ± 0.20	± 10%			C2012C0G2A272K125AA
			± 5%			C2012C0G2A272J125AA
	3216	1.60 ± 0.20	± 10%	C3216C0G2J272K160AA		
			± 5%	C3216C0G2J272J160AA		
3.3 nF	2012	1.25 ± 0.20	± 10%			C2012C0G2A332K125AA
			± 5%			C2012C0G2A332J125AA
3216	0.85 ± 0.15	± 10%		C3216C0G2E332K085AA		
		± 5%		C3216C0G2E332J085AA		



Capacitance Range Table

Class 1 (Temperature Compensating)

Temperature Characteristics: C0G (-55 to +125°C, 0±30 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number			
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V	
3.3 nF	3216	1.60 ± 0.20	± 10%	C3216C0G2J332K160AA			
			± 5%	C3216C0G2J332J160AA			
	2012	1.25 ± 0.20	± 10%			C2012C0G2A392K125AA	
			± 5%			C2012C0G2A392J125AA	
3.9 nF	3216	0.60 ± 0.15	± 10%			C3216C0G2A392K060AA	
			± 5%			C3216C0G2A392J060AA	
		0.85 ± 0.15	± 10%	C3216C0G2J392K085AA			
			± 5%	C3216C0G2J392J085AA			
	3225	1.25 ± 0.20	± 10%	C3225C0G2J392K125AA			
			± 5%	C3225C0G2J392J125AA			
		2012	1.25 ± 0.20	± 10%			C2012C0G2A472K125AA
				± 5%			C2012C0G2A472J125AA
4.7 nF	3216	0.85 ± 0.15	± 10%	C3216C0G2J472K085AA		C3216C0G2A472K085AA	
			± 5%	C3216C0G2J472J085AA		C3216C0G2A472J085AA	
		1.15 ± 0.15	± 10%		C3216C0G2E392K115AA		
			± 5%		C3216C0G2E392J115AA		
	3225	1.60 ± 0.20	± 10%	C3225C0G2J472K160AA			
			± 5%	C3225C0G2J472J160AA			
		2012	1.25 ± 0.20	± 10%			C2012C0G2A472K125AA
				± 5%			C2012C0G2A472J125AA
5.6 nF	3216	0.85 ± 0.15	± 10%	C3216C0G2J562K115AA	C3216C0G2E562K115AA		
			± 5%	C3216C0G2J562J115AA	C3216C0G2E562J115AA		
		1.15 ± 0.15	± 10%		C3216C0G2E562K115AA		
			± 5%		C3216C0G2E562J115AA		
	3225	1.60 ± 0.20	± 10%	C3225C0G2J562K160AA			
			± 5%	C3225C0G2J562J160AA			
		2012	1.25 ± 0.20	± 10%			C2012C0G2A682K115AA
				± 5%			C2012C0G2A682J115AA
6.8 nF	3216	1.15 ± 0.15	± 10%	C3216C0G2J682K115AA		C3216C0G2A682K115AA	
			± 5%	C3216C0G2J682J115AA		C3216C0G2A682J115AA	
		1.60 ± 0.20	± 10%		C3216C0G2E682K160AA		
			± 5%		C3216C0G2E682J160AA		
	3225	2.00 ± 0.20	± 10%	C3225C0G2J682K200AA			
			± 5%	C3225C0G2J682J200AA			
		2012	1.25 ± 0.20	± 10%			C2012C0G2A822K115AA
				± 5%			C2012C0G2A822J115AA
8.2 nF	3216	1.60 ± 0.20	± 10%	C3216C0G2J822K160AA	C3216C0G2E822K160AA		
			± 5%	C3216C0G2J822J160AA	C3216C0G2E822J160AA		
		1.25 ± 0.20	± 10%	C3225C0G2J822K125AA			
			± 5%	C3225C0G2J822J125AA			
	4532	1.60 ± 0.20	± 10%	C4532C0G2J822K160KA			
			± 5%	C4532C0G2J822J160KA			
		2012	1.25 ± 0.20	± 10%			C3225C0G2A153K125AA
				± 5%			C3225C0G2A153J125AA
10 nF	3216	1.60 ± 0.20	± 10%	C3216C0G2J103K160AA			
			± 5%	C3216C0G2J103J160AA			
		1.25 ± 0.20	± 10%	C3225C0G2J103K125AA			
			± 5%	C3225C0G2J103J125AA			
	3225	1.60 ± 0.20	± 10%		C3225C0G2E103K160AA		
			± 5%		C3225C0G2E103J160AA		
		4532	1.60 ± 0.20	± 10%	C4532C0G2J103K160KA		
				± 5%	C4532C0G2J103J160KA		
15 nF	3225	1.60 ± 0.20	± 10%	C3225C0G2J153K160AA			
			± 5%	C3225C0G2J153J160AA			
		2.00 ± 0.20	± 10%		C3225C0G2E153K200AA		
			± 5%		C3225C0G2E153J200AA		
	4532	2.50 ± 0.30	± 10%	C4532C0G2J153K250KA			
			± 5%	C4532C0G2J153J250KA			
		2012	1.25 ± 0.20	± 10%			C3225C0G2A223K160AA
				± 5%			C3225C0G2A223J160AA
22 nF	3225	1.60 ± 0.20	± 10%			C3225C0G2A223K160AA	
			± 5%			C3225C0G2A223J160AA	



Capacitance Range Table

Class 1 (Temperature Compensating)

Temperature Characteristics: C0G (-55 to +125°C, 0±30 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number			
				Rated Voltage Edc: 630V	Rated Voltage Edc: 450V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
22 nF	3225	2.30 ± 0.20	± 10%	C3225C0G2J223K230AA			
			± 5%	C3225C0G2J223J230AA			
		± 10%			C4532C0G2E223K160KA		
	4532	1.60 ± 0.20	± 5%			C4532C0G2E223J160KA	
			± 10%	C4532C0G2J223K320KA			
		3.20 ± 0.30	± 5%	C4532C0G2J223J320KA			
33 nF	3225	2.00 ± 0.20	± 10%				C3225C0G2A333K200AA
			± 5%				C3225C0G2A333J200AA
		± 10%	C3225C0G2J333K250AA				
	4532	2.50 ± 0.30	± 5%	C3225C0G2J333J250AA			
			± 10%			C4532C0G2E333K200KA	
		2.00 ± 0.20	± 5%			C4532C0G2E333J200KA	
47 nF	3225	2.30 ± 0.20	± 10%				C3225C0G2A473K230AA
			± 5%				C3225C0G2A473J230AA
		± 10%			C4532C0G2A473K200KA		
	4532	2.00 ± 0.20	± 5%				C4532C0G2A473J200KA
			± 10%	C4532C0G2J473K320KA		C4532C0G2E473K320KA	
		3.20 ± 0.30	± 5%	C4532C0G2J473J320KA		C4532C0G2E473J320KA	
68 nF	4532	2.50 ± 0.30	± 10%				C4532C0G2A683K250KA
			± 5%				C4532C0G2A683J250KA
	5750	2.30 ± 0.20	± 10%	C5750C0G2J683K230KC			
		± 5%	C5750C0G2J683J230KC				
100 nF	4532	3.20 ± 0.30	± 10%				C4532C0G2A104K320KA
			± 5%				C4532C0G2A104J320KA
	5750	2.80 ± 0.30	± 10%	C5750C0G2J104K280KC	C5750C0G2W104J280KA		
		± 5%	C5750C0G2J104J280KC	C5750C0G2W104K280KA			

Class 1 (Temperature Compensating)

Temperature Characteristics: CH (-25 to +85°C, 0±60 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
1 pF	1608	0.80 ± 0.10	± 0.25pF			C1608CH2A010C080AA
1.5 pF	1608	0.80 ± 0.10	± 0.25pF			C1608CH2A1R5C080AA
2 pF	1608	0.80 ± 0.10	± 0.25pF			C1608CH2A020C080AA
2.2 pF	1608	0.80 ± 0.10	± 0.25pF			C1608CH2A2R2C080AA
3 pF	1608	0.80 ± 0.10	± 0.25pF			C1608CH2A030C080AA
3.3 pF	1608	0.80 ± 0.10	± 0.25pF			C1608CH2A3R3C080AA
4 pF	1608	0.80 ± 0.10	± 0.25pF			C1608CH2A040C080AA
4.7 pF	1608	0.80 ± 0.10	± 0.25pF			C1608CH2A4R7C080AA
5 pF	1608	0.80 ± 0.10	± 0.25pF			C1608CH2A050C080AA
6 pF	1608	0.80 ± 0.10	± 0.50pF			C1608CH2A060D080AA
6.8 pF	1608	0.80 ± 0.10	± 0.50pF			C1608CH2A6R8D080AA
7 pF	1608	0.80 ± 0.10	± 0.50pF			C1608CH2A070D080AA
8 pF	1608	0.80 ± 0.10	± 0.50pF			C1608CH2A080D080AA
9 pF	1608	0.80 ± 0.10	± 0.50pF			C1608CH2A090D080AA
10 pF	1608	0.80 ± 0.10	± 0.50pF			C1608CH2A100D080AA
12 pF	1608	0.80 ± 0.10	± 5%			C1608CH2A120J080AA
15 pF	1608	0.80 ± 0.10	± 5%			C1608CH2A150J080AA
18 pF	1608	0.80 ± 0.10	± 5%			C1608CH2A180J080AA
22 pF	1608	0.80 ± 0.10	± 5%			C1608CH2A220J080AA
27 pF	1608	0.80 ± 0.10	± 5%			C1608CH2A270J080AA
33 pF	1608	0.80 ± 0.10	± 5%			C1608CH2A330J080AA
39 pF	1608	0.80 ± 0.10	± 5%			C1608CH2A390J080AA
47 pF	1608	0.80 ± 0.10	± 5%			C1608CH2A470J080AA
56 pF	1608	0.80 ± 0.10	± 5%			C1608CH2A560J080AA
68 pF	1608	0.80 ± 0.10	± 5%			C1608CH2A680J080AA
82 pF	1608	0.80 ± 0.10	± 5%			C1608CH2A820J080AA
100 pF	1608	0.80 ± 0.10	± 10%		C1608CH2E101K080AA	C1608CH2A101K080AA
			± 5%		C1608CH2E101J080AA	C1608CH2A101J080AA
			± 10%	C3216CH2J101K060AA		
	3216	0.60 ± 0.15	± 5%	C3216CH2J101J060AA		
120 pF	1608	0.80 ± 0.10	± 10%		C1608CH2E121K080AA	C1608CH2A121K080AA
			± 5%		C1608CH2E121J080AA	C1608CH2A121J080AA



Capacitance Range Table

Class 1 (Temperature Compensating)

Temperature Characteristics: CH (-25 to +85°C, 0±60 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
120 pF	3216	0.60 ± 0.15	± 10%	C3216CH2J121K060AA		
			± 5%	C3216CH2J121J060AA		
150 pF	1608	0.80 ± 0.10	± 10%		C1608CH2E151K080AA	C1608CH2A151K080AA
			± 5%		C1608CH2E151J080AA	C1608CH2A151J080AA
	3216	0.60 ± 0.15	± 10%	C3216CH2J151K060AA		
			± 5%	C3216CH2J151J060AA		
180 pF	1608	0.80 ± 0.10	± 10%		C1608CH2E181K080AA	C1608CH2A181K080AA
			± 5%		C1608CH2E181J080AA	C1608CH2A181J080AA
	3216	0.60 ± 0.15	± 10%	C3216CH2J181K060AA		
			± 5%	C3216CH2J181J060AA		
220 pF	1608	0.80 ± 0.10	± 10%		C1608CH2E221K080AA	C1608CH2A221K080AA
			± 5%		C1608CH2E221J080AA	C1608CH2A221J080AA
	3216	0.60 ± 0.15	± 10%	C3216CH2J221K060AA		
			± 5%	C3216CH2J221J060AA		
270 pF	1608	0.80 ± 0.10	± 10%		C1608CH2E271K080AA	C1608CH2A271K080AA
			± 5%		C1608CH2E271J080AA	C1608CH2A271J080AA
	3216	0.60 ± 0.15	± 10%	C3216CH2J271K060AA		
			± 5%	C3216CH2J271J060AA		
330 pF	1608	0.80 ± 0.10	± 10%		C1608CH2E331K080AA	C1608CH2A331K080AA
			± 5%		C1608CH2E331J080AA	C1608CH2A331J080AA
	3216	0.60 ± 0.15	± 10%	C3216CH2J331K060AA		
			± 5%	C3216CH2J331J060AA		
390 pF	1608	0.80 ± 0.10	± 10%		C1608CH2E391K080AA	C1608CH2A391K080AA
			± 5%		C1608CH2E391J080AA	C1608CH2A391J080AA
	3216	0.60 ± 0.15	± 10%	C3216CH2J391K060AA		
			± 5%	C3216CH2J391J060AA		
470 pF	1608	0.80 ± 0.10	± 10%		C1608CH2E471K080AA	C1608CH2A471K080AA
			± 5%		C1608CH2E471J080AA	C1608CH2A471J080AA
	3216	0.85 ± 0.15	± 10%	C3216CH2J471K085AA		
			± 5%	C3216CH2J471J085AA		
560 pF	1608	0.80 ± 0.10	± 10%		C1608CH2E561K080AA	C1608CH2A561K080AA
			± 5%		C1608CH2E561J080AA	C1608CH2A561J080AA
	3216	0.85 ± 0.15	± 10%	C3216CH2J561K085AA		
			± 5%	C3216CH2J561J085AA		
680 pF	1608	0.80 ± 0.10	± 10%		C1608CH2E681K080AA	C1608CH2A681K080AA
			± 5%		C1608CH2E681J080AA	C1608CH2A681J080AA
	3216	0.85 ± 0.15	± 10%	C3216CH2J681K085AA		
			± 5%	C3216CH2J681J085AA		
820 pF	1608	0.80 ± 0.10	± 10%			C1608CH2A821K080AA
			± 5%			C1608CH2A821J080AA
	2012	0.60 ± 0.15	± 10%		C2012CH2E821K060AA	
			± 5%		C2012CH2E821J060AA	
1 nF	3216	0.85 ± 0.15	± 10%	C3216CH2J821K085AA		
			± 5%	C3216CH2J821J085AA		
	1608	0.80 ± 0.10	± 10%			C1608CH2A102K080AA
			± 5%			C1608CH2A102J080AA
1.2 nF	2012	0.60 ± 0.15	± 5%			C2012CH2A102J060AA
			± 10%		C2012CH2E102K085AA	
	3216	0.85 ± 0.15	± 10%	C3216CH2J102K085AA		
			± 5%	C3216CH2J102J085AA		
1.5 nF	1608	0.80 ± 0.10	± 10%			C1608CH2A122K080AA
			± 5%			C1608CH2A122J080AA
	2012	0.60 ± 0.15	± 5%			C2012CH2A122J060AA
			± 10%		C2012CH2E122K085AA	
1.5 nF	3216	0.85 ± 0.15	± 10%	C3216CH2J122K085AA		
			± 5%	C3216CH2J122J085AA		
	2012	0.60 ± 0.15	± 10%			C2012CH2A152K060AA
			± 5%			C2012CH2A152J060AA



Capacitance Range Table

Class 1 (Temperature Compensating)

Temperature Characteristics: CH (-25 to +85°C, 0±60 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
1.5 nF	2012	0.85 ± 0.15	± 10%		C2012CH2E152K085AA	
			± 5%		C2012CH2E152J085AA	
	3216	1.15 ± 0.15	± 10%	C3216CH2J152K115AA		
			± 5%	C3216CH2J152J115AA		
1.8 nF	2012	0.85 ± 0.15	± 10%			C2012CH2A182K085AA
			± 5%			C2012CH2A182J085AA
	3216	1.15 ± 0.15	± 10%	C3216CH2J182K115AA		
			± 5%	C3216CH2J182J115AA		
2.2 nF	2012	0.85 ± 0.15	± 10%			C2012CH2A222K085AA
			± 5%			C2012CH2A222J085AA
	3216	1.15 ± 0.15	± 10%	C3216CH2J222K115AA		
			± 5%	C3216CH2J222J115AA		
2.7 nF	2012	1.25 ± 0.20	± 10%		C2012CH2E272K125AA	C2012CH2A272K125AA
			± 5%		C2012CH2E272J125AA	C2012CH2A272J125AA
	3216	1.60 ± 0.20	± 10%	C3216CH2J272K160AA		
			± 5%	C3216CH2J272J160AA		
3.3 nF	2012	1.25 ± 0.20	± 10%			C2012CH2A332K125AA
			± 5%			C2012CH2A332J125AA
	3216	0.85 ± 0.15	± 10%		C3216CH2E332K085AA	
			± 5%		C3216CH2E332J085AA	
3.9 nF	2012	1.25 ± 0.20	± 10%			C2012CH2A392K125AA
			± 5%			C2012CH2A392J125AA
	3216	0.85 ± 0.15	± 10%	C3216CH2J392K085AA		
			± 5%	C3216CH2J392J085AA		
4.7 nF	2012	1.25 ± 0.20	± 10%			C2012CH2A472K125AA
			± 5%			C2012CH2A472J125AA
	3216	0.85 ± 0.15	± 10%	C3216CH2J472K085AA		
			± 5%	C3216CH2J472J085AA		
5.6 nF	2012	1.25 ± 0.20	± 10%			C2012CH2A562K125AA
			± 5%			C2012CH2A562J125AA
	3216	0.85 ± 0.15	± 10%	C3216CH2J562K115AA	C3216CH2E562K115AA	
			± 5%	C3216CH2J562J115AA	C3216CH2E562J115AA	
6.8 nF	2012	1.25 ± 0.20	± 10%			C2012CH2A682K125AA
			± 5%			C2012CH2A682J125AA
	3216	0.85 ± 0.15	± 10%	C3216CH2J682K115AA		
			± 5%	C3216CH2J682J115AA		
8.2 nF	2012	1.25 ± 0.20	± 10%			C2012CH2A822K125AA
			± 5%			C2012CH2A822J125AA
	3216	0.85 ± 0.15	± 10%	C3216CH2J822K160AA	C3216CH2E822K160AA	
			± 5%	C3216CH2J822J160AA	C3216CH2E822J160AA	



Capacitance Range Table

Class 1 (Temperature Compensating)

Temperature Characteristics: CH (-25 to +85°C, 0±60 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number			
				Rated Voltage Edc: 630V	Rated Voltage Edc: 450V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
8.2 nF	3225	1.25 ± 0.20	± 10%	C3225CH2J822K125AA			
			± 5%	C3225CH2J822J125AA			
	4532	1.60 ± 0.20	± 10%	C4532CH2J822K160KA			
			± 5%	C4532CH2J822J160KA			
10 nF	3216	1.15 ± 0.15	± 10%				C3216CH2A103K115AA
			± 5%				C3216CH2A103J115AA
	3225	1.25 ± 0.20	± 10%	C3225CH2J103K125AA			
			± 5%	C3225CH2J103J125AA			
15 nF	4532	1.60 ± 0.20	± 10%	C4532CH2J103K160KA		C3225CH2E103K160AA	
			± 5%	C4532CH2J103J160KA		C3225CH2E103J160AA	
	3225	1.60 ± 0.20	± 10%	C3225CH2J153K160AA			C3225CH2A153K125AA
			± 5%	C3225CH2J153J160AA			C3225CH2A153J125AA
22 nF	4532	2.50 ± 0.30	± 10%	C4532CH2J153K250KA		C3225CH2E153K200AA	
			± 5%	C4532CH2J153J250KA		C3225CH2E153J200AA	
	3225	1.60 ± 0.20	± 10%	C3225CH2J223K230AA			C3225CH2A223K160AA
			± 5%	C3225CH2J223J230AA			C3225CH2A223J160AA
33 nF	4532	1.60 ± 0.20	± 10%	C4532CH2E223K160KA			
			± 5%	C4532CH2E223J160KA			
	3225	2.00 ± 0.20	± 10%	C3225CH2J223K230AA			C3225CH2A333K200AA
			± 5%	C3225CH2J223J230AA			C3225CH2A333J200AA
47 nF	4532	2.00 ± 0.20	± 10%	C4532CH2E333K200KA		C4532CH2E333K200KA	
			± 5%	C4532CH2E333J200KA		C4532CH2E333J200KA	
	3225	2.30 ± 0.20	± 10%	C3225CH2J473K230AA			C3225CH2A473K230AA
			± 5%	C3225CH2J473J230AA			C3225CH2A473J200KA
68 nF	4532	2.50 ± 0.30	± 10%	C4532CH2J473K320KA		C4532CH2E473K320KA	C4532CH2A473K200KA
			± 5%	C4532CH2J473J320KA		C4532CH2E473J320KA	C4532CH2A473J200KA
	5750	2.30 ± 0.20	± 10%	C5750CH2J683K230KC			C4532CH2A683K250KA
			± 5%	C5750CH2J683J230KC			C4532CH2A683J250KA
100 nF	4532	3.20 ± 0.30	± 10%				C4532CH2A104K320KA
			± 5%				C4532CH2A104J320KA
	5750	2.80 ± 0.30	± 10%	C5750CH2J104K280KC	C5750CH2W104J280KA		
			± 5%	C5750CH2J104J280KC	C5750CH2W104K280KA		

Class 2 (Temperature Stable)

Temperature Characteristics: JB (-25 to +85°C, ±10%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
1 nF	1608	0.80 ± 0.10	± 10%			C1608JB2A102K080AA
			± 20%			C1608JB2A102M080AA
	2012	0.85 ± 0.15	± 10%		C2012JB2E102K085AA	C2012JB2A102K085AA
			± 20%		C2012JB2E102M085AA	C2012JB2A102M085AA
1.5 nF	3216	1.15 ± 0.10	± 10%	C3216JB2J102K115AA		
			± 20%	C3216JB2J102M115AA		
	1608	0.80 ± 0.10	± 10%			C1608JB2A152K080AA
			± 20%			C1608JB2A152M080AA
2012	0.85 ± 0.15	± 10%		C2012JB2E152K085AA	C2012JB2A152K085AA	
		± 20%		C2012JB2E152M085AA	C2012JB2A152M085AA	



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: JB (-25 to +85°C, ±10%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
1.5 nF	3216	1.15 ± 0.10	± 10%	C3216JB2J152K115AA		
			± 20%	C3216JB2J152M115AA		
2.2 nF	1608	0.80 ± 0.10	± 10%			C1608JB2A222K080AA
			± 20%			C1608JB2A222M080AA
	2012	0.85 ± 0.15	± 10%		C2012JB2E222K085AA	C2012JB2A222K085AA
			± 20%		C2012JB2E222M085AA	C2012JB2A222M085AA
3216	1.15 ± 0.10	± 10%	C3216JB2J222K115AA			
		± 20%	C3216JB2J222M115AA			
3.3 nF	1608	0.80 ± 0.10	± 10%			C1608JB2A332K080AA
			± 20%			C1608JB2A332M080AA
	2012	0.85 ± 0.15	± 10%		C2012JB2E332K085AA	C2012JB2A332K085AA
			± 20%		C2012JB2E332M085AA	C2012JB2A332M085AA
3216	1.15 ± 0.10	± 10%	C3216JB2J332K115AA			
		± 20%	C3216JB2J332M115AA			
4.7 nF	1608	0.80 ± 0.10	± 10%			C1608JB2A472K080AA
			± 20%			C1608JB2A472M080AA
	2012	0.85 ± 0.15	± 10%		C2012JB2E472K085AA	C2012JB2A472K085AA
			± 20%		C2012JB2E472M085AA	C2012JB2A472M085AA
3216	1.15 ± 0.10	± 10%	C3216JB2J472K115AA			
		± 20%	C3216JB2J472M115AA			
6.8 nF	1608	0.80 ± 0.10	± 10%			C1608JB2A682K080AA
			± 20%			C1608JB2A682M080AA
	2012	0.85 ± 0.15	± 10%			C2012JB2A682K085AA
			± 20%			C2012JB2A682M085AA
3216	1.15 ± 0.10	± 10%	C3216JB2J682K115AA			
		± 20%	C3216JB2J682M115AA			
10 nF	1608	0.80 ± 0.10	± 10%			C1608JB2A103K080AA
			± 20%			C1608JB2A103M080AA
	2012	0.85 ± 0.15	± 10%			C2012JB2A103K085AA
			± 20%			C2012JB2A103M085AA
3216	1.15 ± 0.10	± 10%	C3216JB2J103K115AA			
		± 20%	C3216JB2J103M115AA			
15 nF	1608	0.80 ± 0.10	± 10%			C1608JB2A153K080AA
			± 20%			C1608JB2A153M080AA
	2012	1.25 ± 0.20	± 10%		C2012JB2E153K125AA	C2012JB2A153K125AA
			± 20%		C2012JB2E153M125AA	C2012JB2A153M125AA
3216	1.15 ± 0.10	± 10%	C3216JB2E153K115AA			
		± 20%	C3216JB2E153M115AA			
22 nF	1608	0.80 ± 0.10	± 10%			C1608JB2A223K080AA
			± 20%			C1608JB2A223M080AA
	2012	1.25 ± 0.20	± 10%		C2012JB2E223K125AA	C2012JB2A223K125AA
			± 20%		C2012JB2E223M125AA	C2012JB2A223M125AA
3216	1.15 ± 0.10	± 10%		C3216JB2E223K115AA		
		± 20%		C3216JB2E223M115AA		
33 nF	2012	1.25 ± 0.20	± 10%			C2012JB2A333K125AA
			± 20%			C2012JB2A333M125AA
	3216	1.15 ± 0.10	± 10%			C3216JB2A333K115AA
			± 20%			C3216JB2A333M115AA
3216	1.60 ± 0.20	± 10%	C3216JB2J333K160AA	C3216JB2E333K160AA		
		± 20%	C3216JB2J333M160AA	C3216JB2E333M160AA		
47 nF	2012	1.25 ± 0.20	± 10%			C2012JB2A473K125AA
			± 20%			C2012JB2A473M125AA



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: JB (-25 to +85°C, ±10%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
47 nF	3216	1.15 ± 0.10	± 10%			C3216JB2A473K115AA
			± 20%			C3216JB2A473M115AA
		1.60 ± 0.20	± 10%		C3216JB2E473K160AA	
	± 20%			C3216JB2E473M160AA		
	3225	2.00 ± 0.20	± 10%	C3225JB2J473K200AA		
			± 20%	C3225JB2J473M200AA		
68 nF	2012	0.85 ± 0.15	± 10%			C2012JB2A683K085AA
			± 20%			C2012JB2A683M085AA
	3216	1.60 ± 0.20	± 10%		C3216JB2E683K160AA	C3216JB2A683K160AA
			± 20%		C3216JB2E683M160AA	C3216JB2A683M160AA
	3225	2.00 ± 0.20	± 10%	C3225JB2J683K200AA		
			± 20%	C3225JB2J683M200AA		
4532	1.60 ± 0.20	± 10%	C4532JB2J683K160KA			
		± 20%	C4532JB2J683M160KA			
100 nF	2012	1.25 ± 0.20	± 10%			C2012JB2A104K125AA
			± 20%			C2012JB2A104M125AA
	3216	1.60 ± 0.20	± 10%		C3216JB2E104K160AA	C3216JB2A104K160AA
			± 20%		C3216JB2E104M160AA	C3216JB2A104M160AA
	3225	2.00 ± 0.20	± 10%		C3225JB2E104K200AA	
			± 20%		C3225JB2E104M200AA	
4532	2.30 ± 0.20	± 10%	C4532JB2J104K230KA			
		± 20%	C4532JB2J104M230KA			
150 nF	3216	1.60 ± 0.20	± 10%			C3216JB2A154K160AA
			± 20%			C3216JB2A154M160AA
	3225	2.00 ± 0.20	± 10%		C3225JB2E154K200AA	
			± 20%		C3225JB2E154M200AA	
	4532	1.60 ± 0.20	± 10%		C4532JB2E154K160KA	
			± 20%		C4532JB2E154M160KA	
5750	1.60 ± 0.20	± 10%	C5750JB2J154K160KA			
		± 20%	C5750JB2J154M160KA			
220 nF	3216	1.15 ± 0.10	± 10%			C3216JB2A224K115AA
			± 20%			C3216JB2A224M115AA
	3225	2.00 ± 0.20	± 10%		C3225JB2E224K200AA	
			± 20%		C3225JB2E224M200AA	
	4532	2.30 ± 0.20	± 10%		C4532JB2E224K230KA	
			± 20%		C4532JB2E224M230KA	
5750	2.30 ± 0.20	± 10%	C5750JB2J224K230KA			
		± 20%	C5750JB2J224M230KA			
330 nF	3216	1.30 ± 0.10	± 10%			C3216JB2A334K130AA
			± 20%			C3216JB2A334M130AA
	3225	2.00 ± 0.20	± 10%			C3225JB2A334K200AA
			± 20%			C3225JB2A334M200AA
	4532	2.30 ± 0.20	± 10%		C4532JB2E334K230KA	
			± 20%		C4532JB2E334M230KA	
5750	1.60 ± 0.20	± 10%		C5750JB2E334K160KA		
		± 20%		C5750JB2E334M160KA		
470 nF	3216	1.60 ± 0.20	± 10%			C3216JB2A474K160AA
			± 20%			C3216JB2A474M160AA
	3225	2.00 ± 0.20	± 10%			C3225JB2A474K200AA
			± 20%			C3225JB2A474M200AA
	4532	2.30 ± 0.20	± 10%		C4532JB2E474K230KA	
			± 20%		C4532JB2E474M230KA	
5750	2.30 ± 0.20	± 10%		C5750JB2E474K230KA		
		± 20%		C5750JB2E474M230KA		
680 nF	3216	1.60 ± 0.20	± 10%			C3216JB2A684K160AA
			± 20%			C3216JB2A684M160AA
	3225	1.60 ± 0.20	± 10%			C3225JB2A684K160AA
			± 20%			C3225JB2A684M160AA
	4532	2.30 ± 0.20	± 10%			C4532JB2A684K230KA
			± 20%			C4532JB2A684M230KA



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: JB (-25 to +85°C, ±10%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
680 nF	5750	1.60 ± 0.20	± 10%			C5750JB2A684K160KA
			± 20%			C5750JB2A684M160KA
		2.30 ± 0.20	± 10%		C5750JB2E684K230KA	
			± 20%		C5750JB2E684M230KA	
1 µF	3216	1.60 ± 0.20	± 10%			C3216JB2A105K160AA
			± 20%			C3216JB2A105M160AA
	3225	2.00 ± 0.20	± 10%			C3225JB2A105K200AA
			± 20%			C3225JB2A105M200AA
	4532	2.30 ± 0.20	± 10%			C4532JB2A105K230KA
			± 20%			C4532JB2A105M230KA
5750	2.30 ± 0.20	± 10%		C5750JB2E105K230KA	C5750JB2A105K230KA	
			± 20%		C5750JB2E105M230KA	C5750JB2A105M230KA
1.5 µF	3225	2.00 ± 0.20	± 10%			C3225JB2A155K200AB
			± 20%			C3225JB2A155M200AB
	4532	2.30 ± 0.20	± 10%			C4532JB2A155K230KA
			± 20%			C4532JB2A155M230KA
5750	2.30 ± 0.20	± 10%		C5750JB2A155K230KA	C5750JB2A155M230KA	
			± 20%		C5750JB2A155M230KA	
2.2 µF	3225	2.30 ± 0.20	± 10%			C3225JB2A225K230AB
			± 20%			C3225JB2A225M230AB
	4532	2.30 ± 0.20	± 10%			C4532JB2A225K230KA
			± 20%			C4532JB2A225M230KA
5750	2.30 ± 0.20	± 10%		C5750JB2A225K230KA	C5750JB2A225M230KA	
			± 20%		C5750JB2A225M230KA	
3.3 µF	5750	2.30 ± 0.20	± 10%			C5750JB2A335K230KA
			± 20%			C5750JB2A335M230KA
4.7 µF	5750	2.30 ± 0.20	± 10%			C5750JB2A475K230KA
			± 20%			C5750JB2A475M230KA

Class 2 (Temperature Stable)

Temperature Characteristics: X5R (-55 to +85°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
1 nF	1608	0.80 ± 0.10	± 10%			C1608X5R2A102K080AA
			± 20%			C1608X5R2A102M080AA
	2012	0.85 ± 0.15	± 10%		C2012X5R2E102K085AA	
			± 20%		C2012X5R2E102M085AA	
3216	1.15 ± 0.10	± 10%		C3216X5R2J102K115AA		
		± 20%		C3216X5R2J102M115AA		
1.5 nF	1608	0.80 ± 0.10	± 10%			C1608X5R2A152K080AA
			± 20%			C1608X5R2A152M080AA
	2012	0.85 ± 0.15	± 10%		C2012X5R2E152K085AA	
			± 20%		C2012X5R2E152M085AA	
3216	1.15 ± 0.10	± 10%		C3216X5R2J152K115AA		
		± 20%		C3216X5R2J152M115AA		
2.2 nF	1608	0.80 ± 0.10	± 10%			C1608X5R2A222K080AA
			± 20%			C1608X5R2A222M080AA
	2012	0.85 ± 0.15	± 10%		C2012X5R2E222K085AA	
			± 20%		C2012X5R2E222M085AA	
3216	1.15 ± 0.10	± 10%		C3216X5R2J222K115AA		
		± 20%		C3216X5R2J222M115AA		
3.3 nF	1608	0.80 ± 0.10	± 10%			C1608X5R2A332K080AA
			± 20%			C1608X5R2A332M080AA
	2012	0.85 ± 0.15	± 10%		C2012X5R2E332K085AA	
			± 20%		C2012X5R2E332M085AA	
3216	1.15 ± 0.10	± 10%		C3216X5R2J332K115AA		
		± 20%		C3216X5R2J332M115AA		
4.7 nF	1608	0.80 ± 0.10	± 10%			C1608X5R2A472K080AA
			± 20%			C1608X5R2A472M080AA



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: X5R (-55 to +85°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
4.7 nF	2012	0.85 ± 0.15	± 10%		C2012X5R2E472K085AA	
			± 20%		C2012X5R2E472M085AA	
	3216	1.15 ± 0.10	± 10%	C3216X5R2J472K115AA		
			± 20%	C3216X5R2J472M115AA		
6.8 nF	1608	0.80 ± 0.10	± 10%			C1608X5R2A682K080AA
			± 20%			C1608X5R2A682M080AA
	2012	1.25 ± 0.20	± 10%		C2012X5R2E682K125AA	
			± 20%		C2012X5R2E682M125AA	
3216	1.15 ± 0.10	± 10%	C3216X5R2J682K115AA			
		± 20%	C3216X5R2J682M115AA			
10 nF	1608	0.80 ± 0.10	± 10%			C1608X5R2A103K080AA
			± 20%			C1608X5R2A103M080AA
	2012	1.25 ± 0.20	± 10%		C2012X5R2E103K125AA	
			± 20%		C2012X5R2E103M125AA	
3216	1.15 ± 0.10	± 10%	C3216X5R2J103K115AA			
		± 20%	C3216X5R2J103M115AA			
15 nF	1608	0.80 ± 0.10	± 10%			C1608X5R2A153K080AA
			± 20%			C1608X5R2A153M080AA
	2012	1.25 ± 0.20	± 10%		C2012X5R2E153K125AA	
			± 20%		C2012X5R2E153M125AA	
3216	1.30 ± 0.10	± 10%	C3216X5R2J153K130AA			
		± 20%	C3216X5R2J153M130AA			
22 nF	1608	0.80 ± 0.10	± 10%			C1608X5R2A223K080AA
			± 20%			C1608X5R2A223M080AA
	2012	1.25 ± 0.20	± 10%		C2012X5R2E223K125AA	
			± 20%		C2012X5R2E223M125AA	
3216	1.30 ± 0.10	± 10%	C3216X5R2J223K130AA			
		± 20%	C3216X5R2J223M130AA			
33 nF	2012	1.25 ± 0.20	± 10%			C2012X5R2A333K125AA
			± 20%			C2012X5R2A333M125AA
	3216	1.60 ± 0.20	± 10%	C3216X5R2J333K160AA	C3216X5R2E333K160AA	
			± 20%	C3216X5R2J333M160AA	C3216X5R2E333M160AA	
47 nF	2012	1.25 ± 0.20	± 10%			C2012X5R2A473K125AA
			± 20%			C2012X5R2A473M125AA
	3216	1.60 ± 0.20	± 10%		C3216X5R2E473K160AA	
			± 20%		C3216X5R2E473M160AA	
3225	2.00 ± 0.20	± 10%	C3225X5R2J473K200AA			
		± 20%	C3225X5R2J473M200AA			
68 nF	2012	0.85 ± 0.15	± 10%			C2012X5R2A683K085AA
			± 20%			C2012X5R2A683M085AA
	3216	1.60 ± 0.20	± 10%		C3216X5R2E683K160AA	
			± 20%		C3216X5R2E683M160AA	
3225	2.00 ± 0.20	± 10%	C3225X5R2J683K200AA			
		± 20%	C3225X5R2J683M200AA			
100 nF	2012	1.25 ± 0.20	± 10%			C2012X5R2A104K125AA
			± 20%			C2012X5R2A104M125AA
	3216	1.60 ± 0.20	± 10%		C3216X5R2E104K160AA	
			± 20%		C3216X5R2E104M160AA	
4532	2.30 ± 0.20	± 10%	C4532X5R2J104K230KA			
		± 20%	C4532X5R2J104M230KA			
150 nF	3216	1.60 ± 0.20	± 10%			C3216X5R2A154K160AA
			± 20%			C3216X5R2A154M160AA
	3225	2.00 ± 0.20	± 10%		C3225X5R2E154K200AA	
			± 20%		C3225X5R2E154M200AA	
5750	1.60 ± 0.20	± 10%	C5750X5R2J154K160KA			
		± 20%	C5750X5R2J154M160KA			
220 nF	3216	1.15 ± 0.10	± 10%			C3216X5R2A224K115AA
			± 20%			C3216X5R2A224M115AA
	3225	2.00 ± 0.20	± 10%		C3225X5R2E224K200AA	
			± 20%		C3225X5R2E224M200AA	



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: X5R (-55 to +85°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
220 nF	5750	2.30 ± 0.20	± 10%	C5750X5R2J224K230KA		
			± 20%	C5750X5R2J224M230KA		
330 nF	3216	1.30 ± 0.10	± 10%			C3216X5R2A334K130AA
			± 20%			C3216X5R2A334M130AA
	4532	2.30 ± 0.20	± 10%		C4532X5R2E334K230KA	
			± 20%		C4532X5R2E334M230KA	
470 nF	3216	1.60 ± 0.20	± 10%			C3216X5R2A474K160AA
			± 20%			C3216X5R2A474M160AA
	4532	2.30 ± 0.20	± 10%		C4532X5R2E474K230KA	
			± 20%		C4532X5R2E474M230KA	
680 nF	3216	1.60 ± 0.20	± 10%			C3216X5R2A684K160AA
			± 20%			C3216X5R2A684M160AA
	5750	2.30 ± 0.20	± 10%		C5750X5R2E684K230KA	
			± 20%		C5750X5R2E684M230KA	
1 µF	3216	1.60 ± 0.20	± 10%			C3216X5R2A105K160AA
			± 20%			C3216X5R2A105M160AA
	5750	2.30 ± 0.20	± 10%		C5750X5R2E105K230KA	
			± 20%		C5750X5R2E105M230KA	
1.5 µF	3225	2.00 ± 0.20	± 10%			C3225X5R2A155K200AB
			± 20%			C3225X5R2A155M200AB
2.2 µF	3225	2.30 ± 0.20	± 10%			C3225X5R2A225K230AB
			± 20%			C3225X5R2A225M230AB
3.3 µF	5750	2.30 ± 0.20	± 10%			C5750X5R2A335K230KA
			± 20%			C5750X5R2A335M230KA
4.7 µF	5750	2.30 ± 0.20	± 10%			C5750X5R2A475K230KA
			± 20%			C5750X5R2A475M230KA

Class 2 (Temperature Stable)

Temperature Characteristics: X6S (-55 to +105°C, ±22%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number	
				Rated Voltage Edc: 450V	
1 µF	5750	2.50 ± 0.30	± 10%	C5750X6S2W105K250KA	
			± 20%	C5750X6S2W105M250KA	
2.2 µF	5750	2.50 ± 0.30	± 10%	C5750X6S2W225K250KA	
			± 20%	C5750X6S2W225M250KA	

Class 2 (Temperature Stable)

Temperature Characteristics: X7R (-55 to +125°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
1 nF	1608	0.80 ± 0.10	± 10%			C1608X7R2A102K080AA
			± 20%			C1608X7R2A102M080AA
	2012	0.85 ± 0.15	± 10%		C2012X7R2E102K085AA	C2012X7R2A102K085AA
			± 20%		C2012X7R2E102M085AA	C2012X7R2A102M085AA
	3216	1.15 ± 0.15	± 10%	C3216X7R2J102K115AA		
			± 20%	C3216X7R2J102M115AA		
1.5 nF	1608	0.80 ± 0.10	± 10%			C1608X7R2A152K080AA
			± 20%			C1608X7R2A152M080AA
	2012	0.85 ± 0.15	± 10%		C2012X7R2E152K085AA	C2012X7R2A152K085AA
			± 20%		C2012X7R2E152M085AA	C2012X7R2A152M085AA
	3216	1.15 ± 0.15	± 10%	C3216X7R2J152K115AA		
			± 20%	C3216X7R2J152M115AA		
2.2 nF	1608	0.80 ± 0.10	± 10%			C1608X7R2A222K080AA
			± 20%			C1608X7R2A222M080AA
	2012	0.85 ± 0.15	± 10%		C2012X7R2E222K085AA	C2012X7R2A222K085AA
			± 20%		C2012X7R2E222M085AA	C2012X7R2A222M085AA
	3216	1.15 ± 0.15	± 10%	C3216X7R2J222K115AA		
			± 20%	C3216X7R2J222M115AA		



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: X7R (-55 to +125°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
3.3 nF	1608	0.80 ± 0.10	± 10%			C1608X7R2A332K080AA
			± 20%			C1608X7R2A332M080AA
	2012	0.85 ± 0.15	± 10%		C2012X7R2E332K085AA	C2012X7R2A332K085AA
			± 20%		C2012X7R2E332M085AA	C2012X7R2A332M085AA
	3216	1.15 ± 0.15	± 10%	C3216X7R2J332K115AA		
			± 20%	C3216X7R2J332M115AA		
4.7 nF	1608	0.80 ± 0.10	± 10%			C1608X7R2A472K080AA
			± 20%			C1608X7R2A472M080AA
	2012	0.85 ± 0.15	± 10%		C2012X7R2E472K085AA	C2012X7R2A472K085AA
			± 20%		C2012X7R2E472M085AA	C2012X7R2A472M085AA
	3216	1.15 ± 0.15	± 10%	C3216X7R2J472K115AA		
			± 20%	C3216X7R2J472M115AA		
6.8 nF	1608	0.80 ± 0.10	± 10%			C1608X7R2A682K080AA
			± 20%			C1608X7R2A682M080AA
	2012	0.85 ± 0.15	± 10%			C2012X7R2A682K085AA
			± 20%			C2012X7R2A682M085AA
	3216	1.15 ± 0.15	± 10%	C3216X7R2J682K115AA		
			± 20%	C3216X7R2J682M115AA		
10 nF	1608	0.80 ± 0.10	± 10%			C1608X7R2A103K080AA
			± 20%			C1608X7R2A103M080AA
	2012	0.85 ± 0.15	± 10%			C2012X7R2A103K085AA
			± 20%			C2012X7R2A103M085AA
	3216	1.15 ± 0.15	± 10%	C3216X7R2J103K115AA		
			± 20%	C3216X7R2J103M115AA		
15 nF	1608	0.80 ± 0.10	± 10%			C1608X7R2A153K080AA
			± 20%			C1608X7R2A153M080AA
	2012	1.25 ± 0.20	± 10%		C2012X7R2E153K125AA	C2012X7R2A153K125AA
			± 20%		C2012X7R2E153M125AA	C2012X7R2A153M125AA
	3216	1.15 ± 0.15	± 10%		C3216X7R2E153K115AA	
			± 20%		C3216X7R2E153M115AA	
22 nF	1608	0.80 ± 0.10	± 10%			C1608X7R2A223K080AA
			± 20%			C1608X7R2A223M080AA
	2012	1.25 ± 0.20	± 10%		C2012X7R2E223K125AA	C2012X7R2A223K125AA
			± 20%		C2012X7R2E223M125AA	C2012X7R2A223M125AA
	3216	1.15 ± 0.15	± 10%		C3216X7R2E223K115AA	
			± 20%		C3216X7R2E223M115AA	
33 nF	2012	1.25 ± 0.20	± 10%			C2012X7R2A333K125AA
			± 20%			C2012X7R2A333M125AA
	3216	1.15 ± 0.15	± 10%			C3216X7R2A333K115AA
			± 20%			C3216X7R2A333M115AA
	3216	1.60 ± 0.20	± 10%	C3216X7R2J333K160AA	C3216X7R2E333K160AA	
			± 20%	C3216X7R2J333M160AA	C3216X7R2E333M160AA	
47 nF	2012	1.25 ± 0.20	± 10%			C2012X7R2A473K125AA
			± 20%			C2012X7R2A473M125AA
	3216	1.15 ± 0.15	± 10%			C3216X7R2A473K115AA
			± 20%			C3216X7R2A473M115AA
	3216	1.60 ± 0.20	± 10%		C3216X7R2E473K160AA	
			± 20%		C3216X7R2E473M160AA	
3225	2.00 ± 0.20	± 10%	C3225X7R2J473K200AA			
		± 20%	C3225X7R2J473M200AA			
68 nF	2012	0.85 ± 0.15	± 10%			C2012X7R2A683K085AA
			± 20%			C2012X7R2A683M085AA



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: X7R (-55 to +125°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
68 nF	3216	1.60 ± 0.20	± 10%		C3216X7R2E683K160AA	C3216X7R2A683K160AA
			± 20%		C3216X7R2E683M160AA	C3216X7R2A683M160AA
	3225	2.00 ± 0.20	± 10%	C3225X7R2J683K200AA		
			± 20%	C3225X7R2J683M200AA		
	4532	1.60 ± 0.20	± 10%	C4532X7R2J683K160KA		
			± 20%	C4532X7R2J683M160KA		
100 nF	2012	1.25 ± 0.20	± 10%			C2012X7R2A104K125AA
			± 20%			C2012X7R2A104M125AA
	3216	1.60 ± 0.20	± 10%		C3216X7R2E104K160AA	C3216X7R2A104K160AA
			± 20%		C3216X7R2E104M160AA	C3216X7R2A104M160AA
	3225	2.00 ± 0.20	± 10%		C3225X7R2E104K200AA	
			± 20%		C3225X7R2E104M200AA	
4532	2.30 ± 0.20	± 10%	C4532X7R2J104K230KA			
		± 20%	C4532X7R2J104M230KA			
150 nF	3216	1.60 ± 0.20	± 10%			C3216X7R2A154K160AA
			± 20%			C3216X7R2A154M160AA
	3225	2.00 ± 0.20	± 10%		C3225X7R2E154K200AA	
			± 20%		C3225X7R2E154M200AA	
	4532	1.60 ± 0.20	± 10%		C4532X7R2E154K160KA	
			± 20%		C4532X7R2E154M160KA	
5750	1.60 ± 0.20	± 10%	C5750X7R2J154K160KA			
		± 20%	C5750X7R2J154M160KA			
220 nF	3216	1.15 ± 0.15	± 10%			C3216X7R2A224K115AA
			± 20%			C3216X7R2A224M115AA
	3225	2.00 ± 0.20	± 10%		C3225X7R2E224K200AA	
			± 20%		C3225X7R2E224M200AA	
	4532	2.30 ± 0.20	± 10%		C4532X7R2E224K230KA	
			± 20%		C4532X7R2E224M230KA	
5750	2.30 ± 0.20	± 10%	C5750X7R2J224K230KA			
		± 20%	C5750X7R2J224M230KA			
330 nF	3216	1.30 ± 0.20	± 10%			C3216X7R2A334K130AA
			± 20%			C3216X7R2A334M130AA
	3225	2.00 ± 0.20	± 10%			C3225X7R2A334K200AA
			± 20%			C3225X7R2A334M200AA
	4532	2.30 ± 0.20	± 10%		C4532X7R2E334K230KA	
			± 20%		C4532X7R2E334M230KA	
5750	1.60 ± 0.20	± 10%		C5750X7R2E334K160KA		
		± 20%		C5750X7R2E334M160KA		
470 nF	3216	1.60 ± 0.20	± 10%			C3216X7R2A474K160AA
			± 20%			C3216X7R2A474M160AA
	3225	2.00 ± 0.20	± 10%			C3225X7R2A474K200AA
			± 20%			C3225X7R2A474M200AA
	4532	2.30 ± 0.20	± 10%		C4532X7R2E474K230KA	
			± 20%		C4532X7R2E474M230KA	
5750	2.30 ± 0.20	± 10%		C5750X7R2E474K230KA		
		± 20%		C5750X7R2E474M230KA		
680 nF	3216	1.60 ± 0.20	± 10%			C3216X7R2A684K160AA
			± 20%			C3216X7R2A684M160AA
	3225	1.60 ± 0.20	± 10%			C3225X7R2A684K160AA
			± 20%			C3225X7R2A684M160AA
	4532	2.30 ± 0.20	± 10%		C4532X7R2A684K230KA	
			± 20%		C4532X7R2A684M230KA	
5750	1.60 ± 0.20	± 10%			C5750X7R2A684K160KA	
		± 20%			C5750X7R2A684M160KA	
1 µF	3216	1.60 ± 0.20	± 10%			C3216X7R2A105K160AA
			± 20%			C3216X7R2A105M160AA
	3225	2.00 ± 0.20	± 10%			C3225X7R2A105K200AA
			± 20%			C3225X7R2A105M200AA



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: X7R (-55 to +125°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
1 µF	4532	2.30 ± 0.20	± 10%			C4532X7R2A105K230KA
			± 20%			C4532X7R2A105M230KA
	5750	2.30 ± 0.20	± 10%	C5750X7R2E105K230KA	C5750X7R2A105K230KA	
			± 20%	C5750X7R2E105M230KA	C5750X7R2A105M230KA	
1.5 µF	3225	2.00 ± 0.20	± 10%			C3225X7R2A155K200AB
			± 20%			C3225X7R2A155M200AB
	4532	2.30 ± 0.20	± 10%			C4532X7R2A155K230KA
			± 20%			C4532X7R2A155M230KA
2.2 µF	5750	2.30 ± 0.20	± 10%			C5750X7R2A155K230KA
			± 20%			C5750X7R2A155M230KA
	3225	2.30 ± 0.20	± 10%			C3225X7R2A225K230AB
			± 20%			C3225X7R2A225M230AB
3.3 µF	4532	2.30 ± 0.20	± 10%			C4532X7R2A225K230KA
			± 20%			C4532X7R2A225M230KA
	5750	2.30 ± 0.20	± 10%			C5750X7R2A225K230KA
			± 20%			C5750X7R2A225M230KA
4.7 µF	5750	2.30 ± 0.20	± 10%			C5750X7R2A335K230KA
			± 20%			C5750X7R2A335M230KA
4.7 µF	5750	2.30 ± 0.20	± 10%			C5750X7R2A475K230KA
			± 20%			C5750X7R2A475M230KA

Class 2 (Temperature Stable)

Temperature Characteristics: X7T (-55 to +125°C, +22/-33%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
1 nF	1005	0.50 ± 0.05	± 10%			C1005X7S2A102K050BB
			± 20%			C1005X7S2A102M050BB
1.5 nF	1005	0.50 ± 0.05	± 10%			C1005X7S2A152K050BB
			± 20%			C1005X7S2A152M050BB
2.2 nF	1005	0.50 ± 0.05	± 10%			C1005X7S2A222K050BB
			± 20%			C1005X7S2A222M050BB
3.3 nF	1005	0.50 ± 0.05	± 10%			C1005X7S2A332K050BB
			± 20%			C1005X7S2A332M050BB
4.7 nF	1005	0.50 ± 0.05	± 10%			C1005X7S2A472K050BB
			± 20%			C1005X7S2A472M050BB
6.8 nF	1005	0.50 ± 0.05	± 10%			C1005X7S2A682K050BB
			± 20%			C1005X7S2A682M050BB
10 nF	1005	0.50 ± 0.05	± 10%			C1005X7S2A103K050BB
			± 20%			C1005X7S2A103M050BB
33 nF	1608	0.80 ± 0.10	± 10%			C1608X7S2A333K080AB
			± 20%			C1608X7S2A333M080AB
47 nF	1608	0.80 ± 0.10	± 10%			C1608X7S2A473K080AB
			± 20%			C1608X7S2A473M080AB
68 nF	1608	0.80 ± 0.10	± 10%			C1608X7S2A683K080AB
			± 20%			C1608X7S2A683M080AB
100 nF	1608	0.80 ± 0.10	± 10%			C1608X7S2A104K080AB
			± 20%			C1608X7S2A104M080AB
150 nF	2012	0.85 ± 0.15	± 10%			C2012X7S2A154K085AB
			± 20%			C2012X7S2A154M085AB
220 nF	2012	0.85 ± 0.15	± 10%			C2012X7S2A224K085AB
			± 20%			C2012X7S2A224M085AB
330 nF	2012	1.25 ± 0.20	± 10%			C2012X7S2A334K125AB
			± 20%			C2012X7S2A334M125AB
470 nF	2012	1.25 ± 0.20	± 10%			C2012X7S2A474K125AB
			± 20%			C2012X7S2A474M125AB
680 nF	2012	1.25 ± 0.20	± 10%			C2012X7S2A684K125AB
			± 20%			C2012X7S2A684M125AB
1 µF	2012	1.25 ± 0.20	± 10%			C2012X7S2A105K125AB
			± 20%			C2012X7S2A105M125AB



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: X7S (-55 to +125°C, ±22%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V
1.5 µF	3216	1.60 ± 0.20	± 10%			C3216X7S2A155K160AB
			± 20%			C3216X7S2A155M160AB
2.2 µF	3216	1.60 ± 0.20	± 10%			C3216X7S2A225K160AB
			± 20%			C3216X7S2A225M160AB
3.3 µF	3216	1.60 ± 0.20	± 10%			C3216X7S2A335K160AB
			± 20%			C3216X7S2A335M160AB
	3225	2.00 ± 0.20	± 10%			C3225X7S2A335K200AB
			± 20%			C3225X7S2A335M200AB
	4532	2.00 ± 0.20	± 10%			C4532X7S2A335K200KB
			± 20%			C4532X7S2A335M200KB
4.7 µF	3225	2.00 ± 0.20	± 10%			C3225X7S2A475K200AB
			± 20%			C3225X7S2A475M200AB
	4532	2.30 ± 0.20	± 10%			C4532X7S2A475K230KB
			± 20%			C4532X7S2A475M230KB
6.8 µF	5750	2.00 ± 0.20	± 10%			C5750X7S2A685K200KB
			± 20%			C5750X7S2A685M200KB
10 µF	5750	2.30 ± 0.20	± 10%			C5750X7S2A106K230KB
			± 20%			C5750X7S2A106M230KB
15 µF	5750	2.50 ± 0.30	± 20%			C5750X7S2A156M250KB

Class 2 (Temperature Stable)

Temperature Characteristics: X7T (-55 to +125°C, +22/-33%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number			
				Rated Voltage Edc: 630V	Rated Voltage Edc: 450V	Rated Voltage Edc: 350V	Rated Voltage Edc: 250V
10 nF	2012	0.85 ± 0.15	± 10%		C2012X7T2W103K085AA	C2012X7T2V103K085AA	
			± 20%		C2012X7T2W103M085AA	C2012X7T2V103M085AA	
	3216	0.85 ± 0.10	± 10%		C3216X7T2J103K085AC		
			± 20%		C3216X7T2J103M085AC		
15 nF	2012	0.85 ± 0.15	± 10%		C2012X7T2W153K085AA	C2012X7T2V153K085AA	
			± 20%		C2012X7T2W153M085AA	C2012X7T2V153M085AA	
	3216	0.85 ± 0.10	± 10%		C3216X7T2J153K085AC		
			± 20%		C3216X7T2J153M085AC		
22 nF	2012	1.25 ± 0.20	± 10%		C2012X7T2W223K125AA	C2012X7T2V223K125AA	
			± 20%		C2012X7T2W223M125AA	C2012X7T2V223M125AA	
	3216	1.15 ± 0.10	± 10%		C3216X7T2J223K115AC		
			± 20%		C3216X7T2J223M115AC		
33 nF	2012	1.25 ± 0.20	± 10%		C2012X7T2W333K125AA	C2012X7T2V333K125AA	C2012X7T2E333K125AA
			± 20%		C2012X7T2W333M125AA	C2012X7T2V333M125AA	C2012X7T2E333M125AA
	3216	1.15 ± 0.10	± 10%		C3216X7T2J333K115AC		
			± 20%		C3216X7T2J333M115AC		
47 nF	2012	1.25 ± 0.20	± 10%		C2012X7T2W473K125AA	C2012X7T2V473K125AA	C2012X7T2E473K125AA
			± 20%		C2012X7T2W473M125AA	C2012X7T2V473M125AA	C2012X7T2E473M125AA
	3216	1.60 ± 0.20	± 10%		C3216X7T2J473K160AC		
			± 20%		C3216X7T2J473M160AC		
68 nF	2012	1.25 ± 0.20	± 10%				C2012X7T2E683K125AA
			± 20%				C2012X7T2E683M125AA
	3216	1.30 ± 0.10	± 10%		C3216X7T2W683K130AA	C3216X7T2V683K130AA	
			± 20%		C3216X7T2W683M130AA	C3216X7T2V683M130AA	
100 nF	2012	1.25 ± 0.20	± 10%				C2012X7T2E104K125AA
			± 20%				C2012X7T2E104M125AA
	3216	1.60 ± 0.20	± 10%		C3216X7T2W104K160AA	C3216X7T2V104K160AA	
			± 20%		C3216X7T2W104M160AA	C3216X7T2V104M160AA	
3225	1.60 ± 0.20	± 10%		C3225X7T2J104K160AC			
		± 20%		C3225X7T2J104M160AC			
150 nF	3216	1.30 ± 0.10	± 10%				C3216X7T2E154K130AA
			± 20%				C3216X7T2E154M130AA
	3225	2.00 ± 0.20	± 10%		C3225X7T2J154K200AC		
			± 20%		C3225X7T2J154M200AC		
4532	1.60 ± 0.20	± 10%		C4532X7T2J154K160KC			
		± 20%		C4532X7T2J154M160KC			



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: X7T (-55 to +125°C, +22/-33%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	TDK Part Number			
				Rated Voltage Edc: 630V	Rated Voltage Edc: 450V	Rated Voltage Edc: 350V	Rated Voltage Edc: 250V
220 nF	3216	1.60 ± 0.20	± 10%				C3216X7T2E224K160AA
			± 20%				C3216X7T2E224M160AA
	3225	2.00 ± 0.20	± 10%		C3225X7T2W224K200AA		
			± 20%		C3225X7T2W224M200AA		
	4532	2.00 ± 0.20	± 10%	C4532X7T2J224K200KC			
			± 20%	C4532X7T2J224M200KC			
300 nF	4532	2.00 ± 0.20	± 10%	C4532X7T2J304K250KA			
			± 20%	C4532X7T2J304M250KA			
	3225	2.00 ± 0.20	± 10%				C3225X7T2E334K200AA
			± 20%				C3225X7T2E334M200AA
330 nF	4532	1.60 ± 0.20	± 10%		C4532X7T2W334K160KA		
			± 20%		C4532X7T2W334M160KA		
	5750	2.00 ± 0.20	± 10%	C5750X7T2J334K200KC			
			± 20%	C5750X7T2J334M200KC			
470 nF	4532	2.30 ± 0.20	± 10%		C4532X7T2W474K230KA		
			± 20%		C4532X7T2W474M230KA		
	5750	2.50 ± 0.30	± 10%	C5750X7T2J474K250KC			
			± 20%	C5750X7T2J474M250KC			
680 nF	4532	1.60 ± 0.20	± 10%				C4532X7T2E684K160KA
			± 20%				C4532X7T2E684M160KA
	5750	2.00 ± 0.20	± 10%		C5750X7T2W684K200KA		
			± 20%		C5750X7T2W684M200KA		
1 µF	4532	2.50 ± 0.30	± 10%				C4532X7T2E105K250KA
			± 20%				C4532X7T2E105M250KA
	5750	2.50 ± 0.30	± 10%		C5750X7T2W105K250KA		
			± 20%		C5750X7T2W105M250KA		
1.5 µF	5750	2.00 ± 0.20	± 10%				C5750X7T2E155K200KA
			± 20%				C5750X7T2E155M200KA
2.2 µF	5750	2.50 ± 0.30	± 10%				C5750X7T2E225K250KA
			± 20%				C5750X7T2E225M250KA