

TABLE 1

SOCKET SPECS					TYPE AND QTY OF BODIES					
LEAD STYLE	USE SOCKET	# OF FINGER CLIPS	"B"	"C" REF	-SINGLE			-DOUBLE		
					ESS	SSB	TSW	DSB	RTSW	
03	SC-1W1-XX-3	4	.300 [7.62]	.453 [11.51]	1	-	-	2	1	
04	SC-1W1-XX-2	4	.400 [10.16]	.553 [14.05]	1	-	1	3	1	
05	SC-1W1-XX-1	4	.500 [12.70]	.703 [17.86]	1	1	1	4	1	
06	SC-1W1-XX-2	4	.300 [7.62]	.553 [14.05]	1	-	-	2	1	
07	SC-1W1-XX-1	4	.400 [10.16]	.703 [17.86]	1	-	1	3	1	
08	SC-1W1-XX-1	4	.300 [7.62]	.703 [17.86]	1	-	-	2	1	
23	EZ-1W1-XX-3	6	.300 [7.62]	.453 [11.51]	1	-	-	2	1	
24	EZ-1W1-XX-2	6	.400 [10.16]	.553 [14.05]	1	-	1	3	1	
25	EZ-1W1-XX-1	6	.500 [12.70]	.703 [17.86]	1	1	1	4	1	
26	EZ-1W1-XX-2	6	.300 [7.62]	.553 [14.05]	1	-	-	2	1	
27	EZ-1W1-XX-1	6	.400 [10.62]	.703 [17.86]	1	-	1	3	1	
28	EZ-1W1-XX-1	6	.300 [7.62]	.703 [17.86]	1	-	-	2	1	

ESX-1XX-XX/XX-X


ROW SPECIFICATION
-D= DOUBLE
-S= SINGLE

BODY LENGTH SPEC
-01 THRU -36 (-D)
-01 THRU -32 (-S)
"A"= NO. POS. x .100 [2.54]

OPTION
-L: LOCKING LEAD (SEE FIG. 2)

LEAD STYLE
SEE TABLE 1

PLATING SPECIFICATION
-G= GOLD: SPECIFY -GG IN SOCKET SUFFIX -XX
-T= GOLD/TIN: SPECIFY -GT IN SOCKET SUFFIX -XX
-TT= TIN/TIN: SPECIFY -TT IN SOCKET SUFFIX -XX
* -TT PLATING NOT AVAILABLE IN LOWER INSERTION LEAD STYLES 23-28

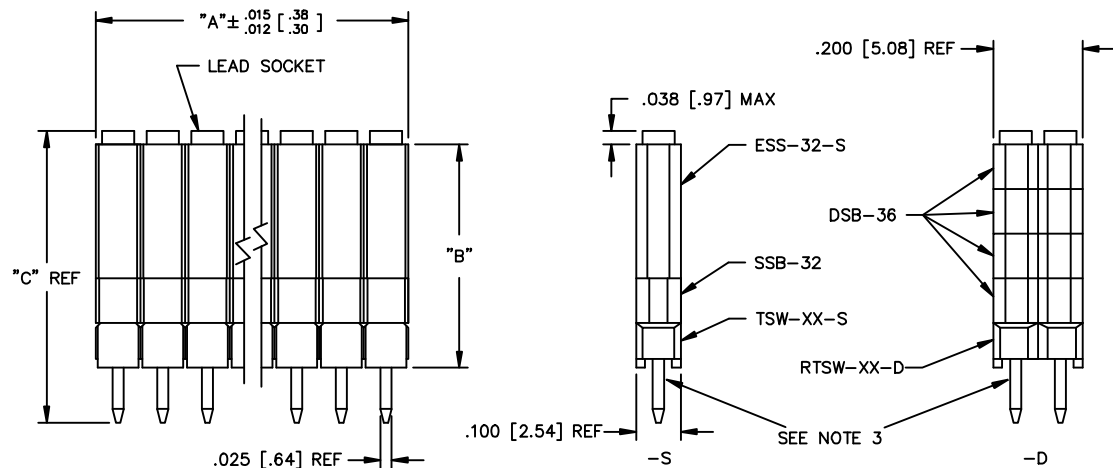


ALL DSB-36 TO BE FILLED WITH COUNTER BORE FACING DOWN.

FIG. 1

NOTES

1. MAX ALLOWABLE BOW: .009 [.23] IN/IN.
2. PUSHOUT FORCE: 5 LBS. MIN.
3. .025 SQ. TAILS MUST BE ORIENTED SQUARE TO EACH OTHER ON -L OPTION ONLY
4. TSW-XX-D TO BE USED IF RTSW-XX-D IS NOT AVAILABLE
5. CUT FLASH NOT TO EXCEED HEIGHT OF STANDOFF (0.028 MAX) OR EXCEED MAX HEIGHT OF LEAD SOCKET (0.038 MAX). IF NO STANDOFF ON TAIL CUT FLASH 0.010 MAX.

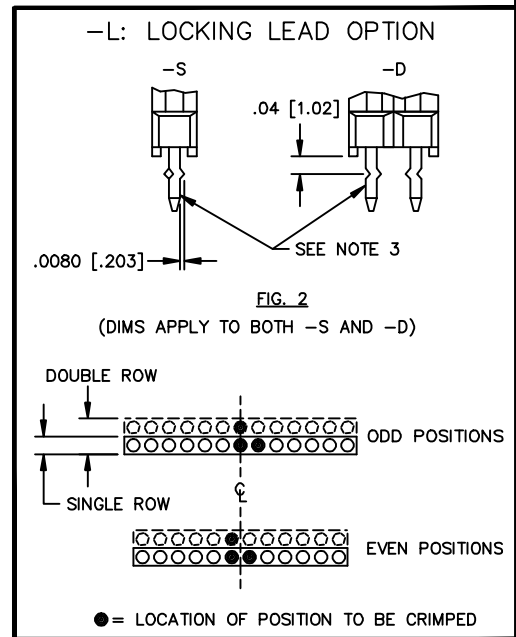

Do not scale
from this print

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

PLOT SCALE: 1=-2

samtec

MISC/MKTG
ESX-MKT

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: PURVIS 7-22-87

ESX-1XX-XX/XX-X
SHEET 1 OF 1