



Modular Series Connector, Receptacle

623T, Panel Mount

Materials

Contact:
.018 Dia. Spring
Wire, Phosphor Bronze

Insulator:
ABS or Polycarbonate
UL 94V-2, Grey

Terminal:
Pin and Spade Lug, Brass

Conductor:
26 Awg (7/34), Stranded


Finishes

Contact:
Selective Au Plating over
50 uinches Ni undercoat
Code A - Au Flash

Code B - 30 uinches Au

Terminal:
Tin Plated


Notes:
Consult our factory
specialists for your
specific design needs.

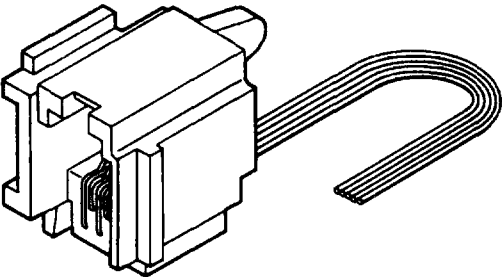


CUT OFF



SOLDER DIP



CRIMPED PIN



SPADE LUG

PART NUMBER	JACK TYPE	TERMINATION TYPE	TERMINATION LENGTH	PLATING CODE
324-020-141	6P4C	SPADE LUG		
324-030-141	6P6C			
324-021-141	6P4C	PIN TERMINAL		
324-031-141	6P6C		7"	A
324-022-141	6P4C	SOLDER DIP		
324-032-141	6P6C			
324-024-141	6P4C	CUT OFF		
324-034-141	6P6C			
324-020-341	6P4C	SPADE LUG		
324-030-341	6P6C			
324-021-341	6P4C	PIN TERMINAL		
324-031-341	6P6C		7"	B
324-022-341	6P4C	SOLDER DIP		
324-032-341	6P6C			
324-024-341	6P4C	CUT OFF		
324-034-341	6P6C			