


- Headers (830 & 832) use MM# 6218 pins. (See page 166 for details)
- Sockets (831 & 833) use MM# 1802 receptacles and accept pin diameters from .015-.025. (See page 138 for details)



- Coplanarity .005" (Single Row max 12 pins; Double Row max 24 pins) for higher pin counts contact tech support.
- Insulators are high temp. thermoplastic.

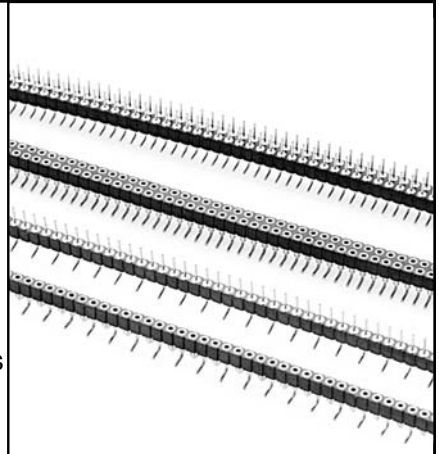

**Ordering Information**

<b>Fig. 1L</b>	<b>Single Row Header, Left Hand Footprint Odd or Even # of pins</b>					
	830-XX-0__-30-001000 Specify # of pins → 01-50					
<b>Fig. 1R</b>	<b>Single Row Header, Right Hand Footprint Even # of pins</b>					
	830-XX-0__-30-002000 Specify even # of pins → 02-50					
<b>Fig. 2</b>	<b>Double Row Header, Even # of pins</b>					
	832-XX-__-30-001000 Specify even # of pins → 004-100					
SPECIFY PLATING CODE XX=		10◇	90	40◇		
Pin Plating		10μ" Au	200μ" Sn/Pb	200μ" Sn		
<b>Fig. 3L</b>	<b>Single Row Socket, Left Hand Footprint Odd or Even # of pins</b>					
	831-XX-0__-30-001000 Specify # of pins → 01-50					
<b>Fig. 3R</b>	<b>Single Row Socket, Right Hand Footprint Even # of pins</b>					
	831-XX-0__-30-002000 Specify even # of pins → 02-50					
<b>Fig. 4</b>	<b>Double Row Socket, Even # of pins</b>					
	833-XX-__-30-001000 Specify even # of pins → 004-100					
SPECIFY PLATING CODE XX=		13◇	93	99	43◇	44◇
Sleeve (Pin)		10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn	200μ" Sn
Contact (Clip)		30μ" Au	30μ" Au	200μ" Sn/Pb	30μ" Au	200μ" Sn