

BBS-1050-Q

1U High, Rackmount Server with Core™ Duo, 4 COM, 5 USB, 180W ATX P/S, 1 Expansion Slot

Bare Bone




Features

- » 1U high, rackmount server design
- » Supports Intel® Core™ Duo processor TDP ≤ 34W
- » VGA, DVI, dual Gigabit Ethernet, Audio port
- » 1 x 2.5"/3.5" SATA HDD space
- » 1 x CF socket
- » 1 x PCI slot
- » 4 x COM port, 5 x USB2.0 port
- » 180W ATX power supply
- » 4 x 4cm ball bearing cooling fan


System

- SBC**
HS-1750
- CPU**
Intel® Core™ Duo processor T2050 1.6GHz (option)
- System Chipset**
Intel® 945GME/ICH7-M
- System Memory**
2 x 200-pin SO-DIMM, DDR2 667/533MHz, Max. 4GB
- Display Interface:**
1 x D-SUB 15-pin
1 x DVI
- Audio Interface**
Audio jack for MIC In, Line Out, Line In
- Ethernet Interface**
2 x RJ-45 for Gigabit Ethernet
- Storage**
1 x 2.5"/3.5" SATA HDD space
1 x Type II CF socket
- Expansion Interface**
1 x PCI slot (if using 3.5" HDD, this slot will not be available)
- Watchdog Timer**
Software programmable time-out intervals from 1~255 sec. or 1~255 min.
- H/W Status Monitor**
Monitoring temperatures, voltages, and cooling fan status
- Thermal System**
4 x 4cm ball bearing cooling fan
- Power**
180W ATX power supply
- Operating/Storage Temperature**
0~50°C/-20~+70°C
- Certification**
FCC/CE Class A compliance
- Dimensions**
47.6(L) x 4.4(H) x 26.1(W) cm

I/O Interface

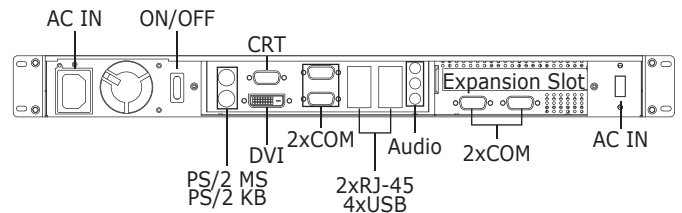

Dimensions (unit:cm)

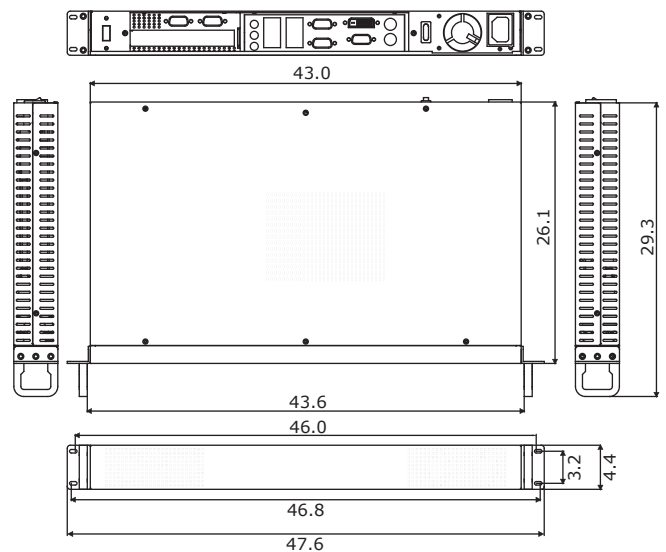

Ordering Information

BBS-1050-Q
Rackmount Server w/4 COM, 5 USB, 180W ATX P/S

Accessory Options
CPU, Memory Module, CF Module, 2.5"/3.5" SATA HDD