



MBR3040CT SERIES

SCHOTTKY BARRIER RECTIFIERS

VOLTAGE 40 to 200 Volts **CURRENT** 30 Amperes

TO-220AB


Unit : inch(mm)

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O.
- Flame Retardant Epoxy Molding Compound.
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency.
- High current capability
- Guardring for overvoltage protection
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications.
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: TO-220AB molded plastic
- Terminals: solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: As marked.
- Mounting Position: Any
- Weight: 0.0655 ounces, 1.859 grams.

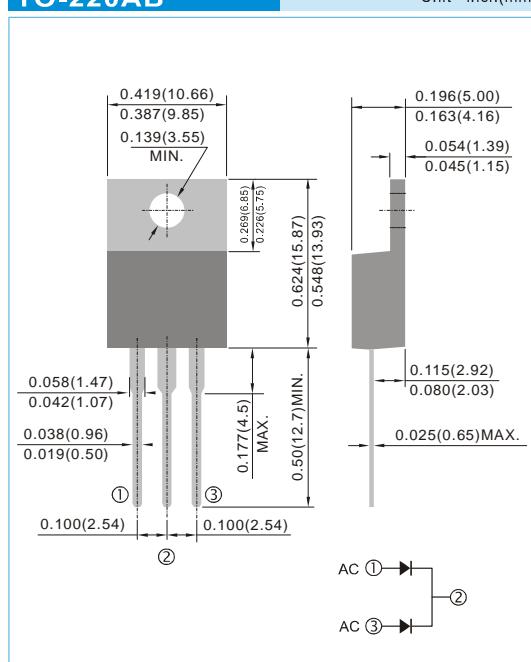

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

PARAMETER	SYMBOL	MBR3040CT	MBR3045CT	MBR3050CT	MBR3060CT	MBR3080CT	MBR3090CT	MBR30100CT	MBR30150CT	MBR30200CT	UNITS				
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	40	45	50	60	80	90	100	150	200	V				
Maximum RMS Voltage	V_{RMS}	28	31.5	35	42	56	63	70	105	140	V				
Maximum DC Blocking Voltage	V_{DC}	40	45	50	60	80	90	100	150	200	V				
Maximum Average Forward Current	$I_{F(AV)}$	30									A				
Peak Forward Surge Current: 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	275									A				
Maximum Forward Voltage at 15A per leg	V_F	0.7		0.75		0.8		0.9		V					
Maximum DC Reverse Current $T_J=25\text{ }^\circ\text{C}$ at Rated DC Blocking Voltage $T_J=125\text{ }^\circ\text{C}$	I_R	0.1 20				0.05 20				mA					
Typical Thermal Resistance	$R_{\theta JC}$	1.4									$^\circ\text{C} / \text{W}$				
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to + 150					-65 to + 175				$^\circ\text{C}$				

Note :

Both Bonding and Chip structure are available.



MBR3040CT SERIES

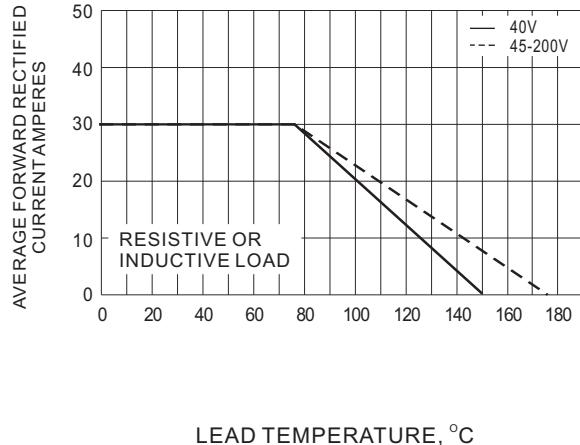


Fig.1- FORWARD CURRENT DERATING CURVE

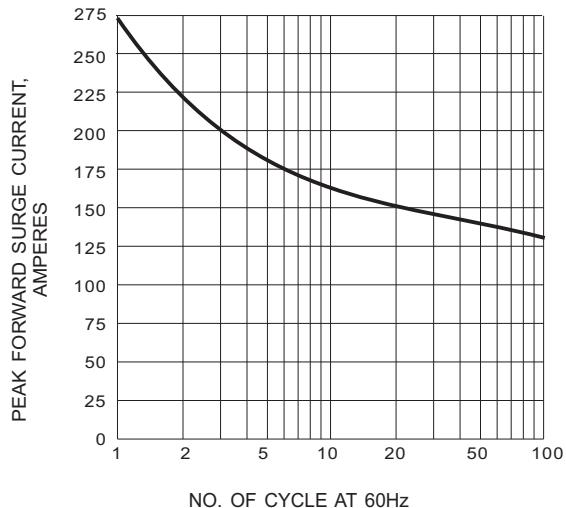


Fig.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

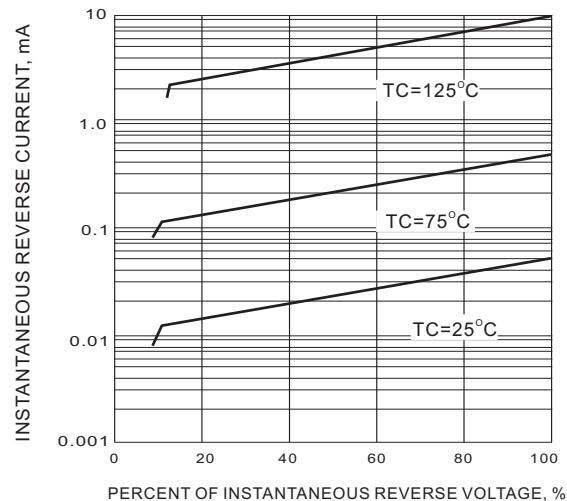


Fig.3- TYPICAL REVERSE CHARACTERISTIC

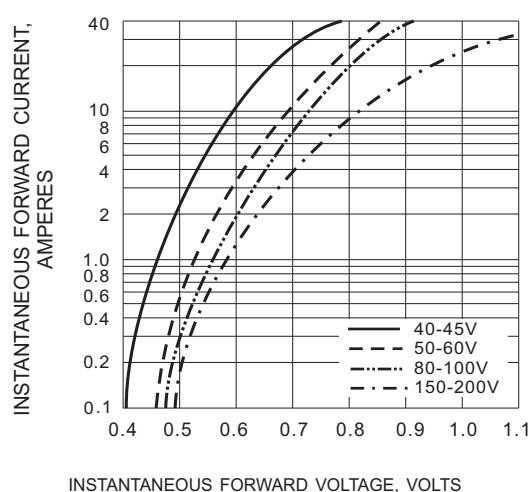


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC