



1N5221 thru 1N5281

Zener Diodes

Zener Voltage Range: 2.4 to 200 Volts

Power Dissipation: 500mW

Features


- ◆ Silicon Planar Power Zener Diodes.
- ◆ Standard Zener voltage tolerance is $\pm 5\%$ with a "B" suffix, and $\pm 10\%$ with a "A" suffix. Other tolerances are available upon request.
- ◆ These diodes are also available in Mini-MELF case with the type designation ZMM5225...ZMM5267.



DO-204AH (DO-35 Glass)

Mechanical Data

- ◆ Case: DO-35 Glass Case
- ◆ Weight: approx. 0.13 gram

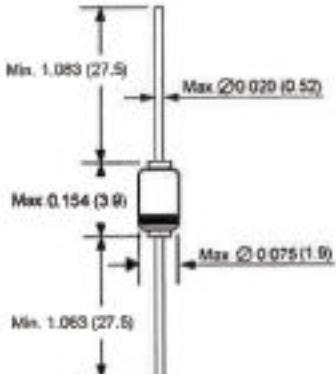

Dimensions in inches and (millimeters)

Maximum Ratings and Thermal Characteristics

($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Zener current (see Table "Characteristics")			
Power dissipation at $T_{j\max}=75^\circ\text{C}$	P_{d}	500 ⁽¹⁾	mW
Thermal resistance junction to ambient air	R_{JA}	300 ⁽¹⁾	°C/W
Maximum junction temperature	T_j	175	°C
Storage temperature range	T_s	-65 to +175	°C

Notes: 1. Valid provided that leads at a distance of 10mm from case are kept at ambient temperature.



Electrical Characteristics

($T = 25^\circ\text{C}$ unless otherwise noted) Maximum $V_z = 1.1\text{V}$ at $I_v = 200\text{mA}$

Type number	Nominal zener voltage ⁽¹⁾ at $I_v = 1\text{mA}$ V_z (Volts)	Test current: I_v (mA)	Maximum zener impedance ⁽²⁾		Typical temperature coefficient ($\Delta V_z / \Delta T$) ($\mu\text{V} / ^\circ\text{K}$)	Maximum regulator current ⁽³⁾ I_{zr} (mA)	Maximum reverse leakage current	
			at $I_v = 1\text{mA}$ Z_{zr} (Ω)	at $I_v = 0.25\text{mA}$ Z_{zr} (Ω)			I_v (μA)	Test voltage V_z (Volts)
1N5221	2.4	20	30	1200	-0.065	-	100	1.0
1N5222	2.8	20	30	1250	-0.065	-	100	1.0
1N5223	2.7	20	30	1300	-0.060	-	75	1.0
1N5224	2.8	20	30	1400	-0.060	-	75	1.0
1N5225	3.0	20	28	1600	-0.075	152	80	1.0
1N5226	3.3	20	28	1600	-0.070	135	25	1.0
1N5227	3.8	20	24	1700	-0.065	125	15	1.0
1N5228	3.9	20	23	1900	-0.060	115	10	1.0
1N5229	4.3	20	22	2000	-0.065	105	5.0	1.0
1N5230	4.7	20	19	1900	+0.030	87	5.0	2.0
1N5231	5.1	20	17	1600	+0.030	88	5.0	2.0
1N5232	5.5	20	11	1600	+0.088	81	5.0	3.0
1N5233	6.0	20	7	1600	+0.098	76	5.0	3.5
1N5234	6.2	20	7	1600	+0.048	73	5.0	4.0
1N5235	6.8	20	5	780	+0.060	67	3.0	5.0
1N5236	7.5	20	6	500	+0.068	61	3.0	6.0
1N5237	8.2	20	8	500	+0.062	55	3.0	6.5
1N5238	8.7	20	8	600	+0.065	52	3.0	6.5
1N5239	9.1	20	10	600	+0.068	50	3.0	7.0
1N5240	10	20	17	600	+0.075	45	3.0	8.0
1N5241	11	20	22	600	+0.076	41	2.0	8.4
1N5242	12	20	35	600	+0.077	38	1.0	9.1
1N5243	13	9.5	13	600	+0.079	35	0.5	9.9
1N5244	14	9.0	15	600	+0.082	32	0.1	10
1N5245	15	9.5	16	600	+0.082	30	0.1	11
1N5246	16	7.8	17	600	+0.085	28	0.1	12
1N5247	17	7.4	19	600	+0.084	27	0.1	13
1N5248	18	7.0	21	600	+0.085	25	0.1	14
1N5249	19	5.5	23	600	+0.086	24	0.1	14
1N5250	20	5.2	25	600	+0.086	23	0.1	15
1N5251	22	5.8	28	600	+0.087	21	0.1	17
1N5252	24	5.2	33	600	+0.087	19.1	0.1	18
1N5253	25	5.0	35	600	+0.086	18.2	0.1	19
1N5254	27	4.8	41	600	+0.090	16.8	0.1	21
1N5255	28	4.5	44	600	+0.091	16.2	0.1	21
1N5256	30	4.2	49	600	+0.091	16.1	0.1	23
1N5257	33	3.8	58	700	+0.092	13.8	0.1	25
1N5258	36	3.4	70	700	+0.093	12.6	0.1	27
1N5259	39	3.2	80	600	+0.094	11.8	0.1	30
1N5260	43	3.0	83	600	+0.085	10.6	0.1	33
1N5261	47	2.7	105	1000	+0.095	9.7	0.1	35
1N5262	51	2.5	125	1100	+0.096	8.9	0.1	39
1N5263	55	2.2	150	1300	+0.096	-	0.1	43
1N5264	60	2.1	170	1400	+0.097	-	0.1	46
1N5266	62	2.0	185	1400	+0.097	-	0.1	47
1N5268	68	1.8	220	1600	+0.097	-	0.1	52
1N5269	75	1.7	270	1700	+0.098	-	0.1	56
1N5270	80	1.5	330	1700	+0.098	-	0.1	62
1N5270	87	1.4	370	2000	+0.099	-	0.1	68
1N5270	91	1.4	400	2200	+0.099	-	0.1	69
1N5271	100	1.3	500	2300	+0.100	-	0.1	75
1N5272	110	1.2	700	-	+0.100	-	0.1	83
1N5273	120	1.0	950	-	+0.100	-	0.1	90
1N5274	130	0.95	1100	-	+0.110	-	0.1	98
1N5275	140	0.90	1300	-	+0.110	-	0.1	105
1N5276	150	0.85	1500	-	+0.110	-	0.1	113
1N5277	160	0.80	1700	-	+0.115	-	0.1	120
1N5278	170	0.74	1800	-	+0.115	-	0.1	127
1N5279	180	0.68	2200	-	+0.120	-	0.1	136
1N5280	190	0.68	3400	-	+0.120	-	0.1	142
1N5281	200	0.65	3500	-	+0.120	-	0.1	150

Notes:

- The Zener Impedance is derived from the 1 KHz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener current (I_{zr} or I_{zv}) is superimposed on I_{zr} or I_{zv} . Zener Impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.

2. Valid provided that leads at a distance of 10 mm from case are kept at ambient temperature.

3. Measured with device junction in thermal equilibrium.


HURGE

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Admissible power dissipation versus ambient temperature

Valid provided that leads at a distance of 10 mm from case are kept at ambient temperature

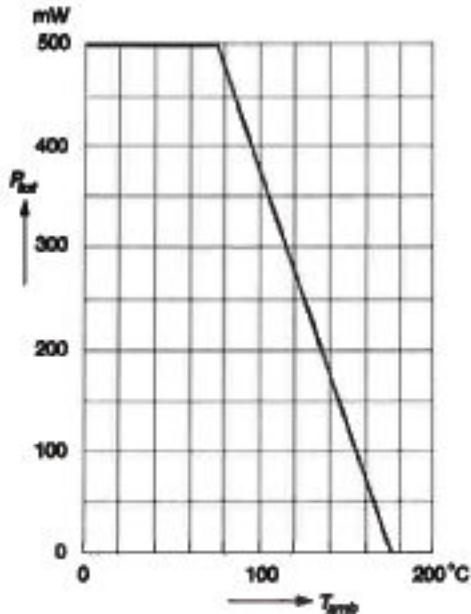

Pulse thermal resistance versus pulse duration

Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature

