




Series 841 Mighty Mouse Plug with Stinger™ Contacts these durable, low insertion force front release size #28 contacts feature integrated retention clips and O-ring sealing for optimized performance. All 841 series shells feature a double-start modified stub ACME mating thread for improved protection against cross-mating and thread damage. Connector shells are machined aluminum or stainless steel. Available in shell sizes 5 through 11 in 7 contact arrangements, all arrangements include a minimum of two guide pins.

How To Order							
Sample Part Number		841-001	-16	M	6-10	P	A
Series (See Table I)	841-001 = Plug with Integral Banding Porch 841-002 = Plug with Accessory Thread						
Shell Style	-16 = Plug with Anti-Decoupling Spring-26 = Self-Locking Plug with Ratchet Mechanism						
Shell Material and Finish	 M = Aluminum/Electroless Nickel RoHS Compliant MT = Aluminum/ Nickel-PTFE RoHS Compliant NF = Aluminum/Cadmium with Olive Drab Chromate ZNU = Aluminum/Zinc-Nickel with Black Chromate Z1 = Stainless Steel/Passivated RoHS Compliant 						
Shell Size - Insert Arrangement	5-5, 6-10, 7-20, 8-28, 9-40, 10-58, 11-71				_		
Contact Type	P = Pin with O-ring S = Socket with O-ring						
Shell Key Positions (See Table II)	A = Normal B = Pos. B C = Pos. C D = Pos. D E = Pos. F	F = Pos. F					•

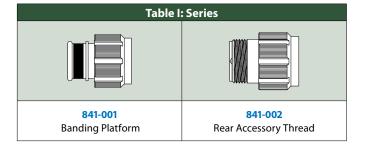

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.