



Solid State High Power Amplifier

33.0 – 35.0 GHz, 10 W, Wide Instantaneous Bandwidth, Ka-Band

Ultra Broadband Series: PA3034X1

FEATURES

Class AB linear GaAsFET hybrid design
 33.0 – 35.0 GHz
 10 Watt output power
 38 dB gain
 8 Volt operation
 Monitoring and remote shutdown

High data rate. Line of sight. Ka-Band.

Millimeter wave power.

Demand for more data bandwidth is pushing operating frequencies up and modulation toward more complex constellations. The MtronPTI PA3034 Solid State Power Amp provides 10 Watts in the Ka-Band from 33.0 to 35.0 GHz off an 8 volt power supply.

APPLICATIONS

Complex modulation standards applications
 Point-to-point digital
 Ka-Band satellite communications

MtronPTI's line of Solid State Power Amplifiers is backed by a multi-national design and manufacturing team with more than 150 years combined PA design experience. MtronPTI's continuing focus on client service ensures full program life engineering support from specification to production to next generation architecture planning.


Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Comment
PASSBAND						
Operating Frequency Range	$F_{CARRIER}$	33.0		35.0	GHz	
Power Output	P_{OUT}	8	10		Watts	CW
Small Signal Gain	A_{RF_MIN}	40			dB	
Power Gain Flatness				3.0	dB _{P-P}	$A_{RF_MAX} - A_{RF_MIN}$
Input Return Loss	RL_{IN}	10			dB	Within the F_{SIG} bandwidth into 50Ω
Harmonics			-20		dBc	At rated POUT
Non Harmonic Spurious				-60	dBc	
Power						
Operating Voltage	V_{DD}	7.5	8.0	8.5	V_{DC}	
Current Consumption	I_{DD}			16	Amps	At rated POUT
Max Input Power	P_{IN_MIN}			+5	dBm	Without damage
Load VSWR Protection			5 : 1			

Environmental & Physical

Parameter	Symbol	Min.	Typ.	Max.	Units	Comment
Operating Case Temperature	T_{OC}	-20		+65	°C	
Storage Temperature	T_{STR}	-40		+85	°C	
Relative Humidity		5		95	%	Non-condensing
Dimensions		210 x 170 x 40			mm	Excluding connectors
Weight						
RF Connectors IN / OUT		K-type female / WR28				
DC Power / Interface Connector		7-Pin D-Sub				
Cooling		External Heat Sink				Forced air required
D-Sub Connector Pin Assignments						
1 FWD	N/C					
2 REV	N/C					
3 Current Sensor	$I_D @ 20\text{ mV} / 100\text{ mA typ.}$					
4 Temperature Sensor	$V_T @ 10\text{ mV} / ^\circ\text{C} + 500\text{ mV typ.}$					
5 Shutdown	TTL					
A1 V_{DD}	8 V_{DC}					
A2 GND	Ground					

Case Outline

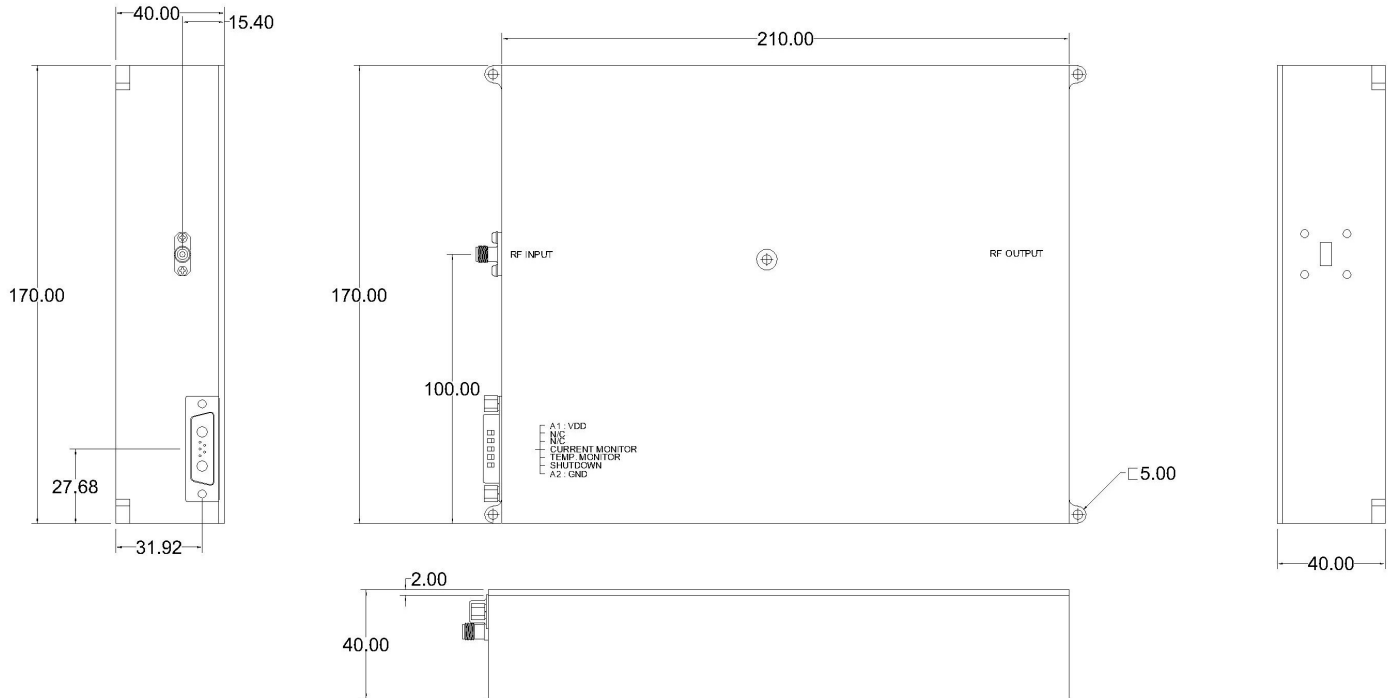

Revision History

Date	Rev.	Orig.	Details of Revision
20150317	A	DPD	Initial

Information provided by MtronPTI is believed to be accurate and reliable. However, no responsibility is assumed by MtronPTI for its use nor for any infringements or patents or other rights of third parties that may result from its use.
 No license is granted by implication or otherwise under any patent or patent rights of MtronPTI.
 MtronPTI may change specifications without notice to improve end application performance or product manufacturability.
 Contact MtronPTI for the most up-to-date information.