


# Inductive proximity switch

# IFRM 03N1713/L

**dimension drawing**



**general data**

mounting type	flush
nominal sensing distance $S_n$	1 mm
temperature drift	- 5 % / + 10 % (+10 ... +60 °C) - 5 % / + 15 % (-10 ... +70 °C)
hysteresis	2 ... 20 % of $S_r$
output indicator	LED red

**electrical data**

switching frequency	< 4 kHz
voltage supply range +Vs	6 ... 30 VDC
current consumption max. (no load)	10 mA
output circuit	NPN make function (NO)
voltage drop Vd	< 2 VDC
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

type	cylindrical smooth
material (sensing face)	POM
housing material	stainless steel
dimension	3 mm
housing length	16 mm
connection types	cable, 2 m


**ambient conditions**

operating temperature	-10 ... +70 °C
protection class	IP 67

**photo**



**connection diagram**

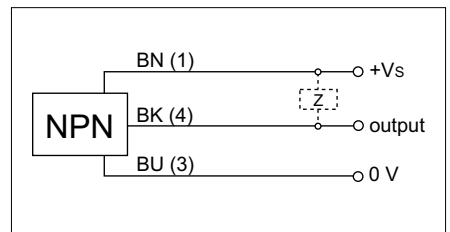

- fully contained
- cable version: 16 mm housing length
- individual strands: 12 mm housing length