



SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, RoHS

**TECHNICAL DATA SHEET** PE39430-6

**Hand Formable SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, RoHS**

Pasternack's formable cable assemblies are hand formable semi-rigid replacements that are an alternative to costly preformed assemblies. The formable semi-rigid cable alternatives are dimensionally and electrically similar to their semi-rigid counterpart and have a tinned-copper-braid outer shield that provides excellent RF shielding. The hand formable cable assemblies from Pasternack do not require special tooling to shape or reshape the assemblies and can replace standard semi-rigid versions. The assemblies are available with or without a PVC jacket and are RoHS compliant,

- Dimensionally and electrically the same as standard, solid outer conductor semi-rigid coax
- Cable may be formed by hand and does not require special tools to bend
- May be formed more than once without damaging the outer conductor
- High RF Shielding >100 dB
- 100% Hi-pot and continuity tested
- 100% VSWR tested to max frequency of assembly
- Standard and custom lengths ship the same day

**Configuration**

|             |                      |
|-------------|----------------------|
| Connector 1 | SMA Male Right Angle |
| Connector 2 | SMA Male Right Angle |
| Cable Type  | PE-SR405FLJ          |

**Electrical Specifications**

|                                 |          |
|---------------------------------|----------|
| Frequency Range, GHz            | DC to 10 |
| Impedance, Ohms                 | 50       |
| Maximum VSWR                    | 1.35:1   |
| Velocity of Propagation, %      | 69       |
| RF Shielding, dB                | 100      |
| Maximum Operating Voltage, Vrms | 335      |

**Typical Performance by Frequency**

**Frequency 1**

|                |                           |
|----------------|---------------------------|
| Frequency, MHz | 1000                      |
| Insertion Loss | 0.225 dB/ft [ 0.74 dB/m ] |

**Frequency 2**

|                |                          |
|----------------|--------------------------|
| Frequency, GHz | 5                        |
| Insertion Loss | 0.549 dB/ft [ 1.8 dB/m ] |

**Frequency 3**

|                |                           |
|----------------|---------------------------|
| Frequency, GHz | 10                        |
| Insertion Loss | 0.812 dB/ft [ 2.66 dB/m ] |

**Mechanical Specifications**

**Cable Assembly**

|            |             |
|------------|-------------|
| Cable Type | PE-SR405FLJ |
|------------|-------------|

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, RoHS PE39430-6](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, RoHS

TECHNICAL DATA SHEET

PE39430-6

**Temperature**

Temperature Operating Range, deg C -55 to +125

**Size**

Length, in [mm] 6 [152.4]  
 Diameter, in [mm] 0.098 [2.49]  
 Cable Color Black  
 One Time Minimum Bend Radius, in [mm] 0.37 [9.4]  
 Repeated Minimum Bend Radius, in [mm] 0.787 [19.99]

**Cable**

Center Conductor Type Solid  
 Cable Inner Conductor Copper Clad Steel, Silver  
 No of Shields 1  
 Dielectric Type PTFE  
 Jacket Material FEP  
 Jacket Diameter, in [mm] 0.098 [2.49]

**Connector 1**

Type SMA Male Right Angle  
 Configuration Right Angle

**Connector 2**

Type SMA Male Right Angle  
 Configuration Right Angle

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant Yes

**Plotted and Other Data**

Notes: Values at 25 °C, sea level

SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, RoHS PE39430-6](http://www.pasternack.com/sma-male-sma-male-pe-sr405flj-cable-assembly-pe39430-6-p.aspx)


URL: <http://www.pasternack.com/sma-male-sma-male-pe-sr405flj-cable-assembly-pe39430-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



# PE39430-6 CAD Drawing

SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, RoHS

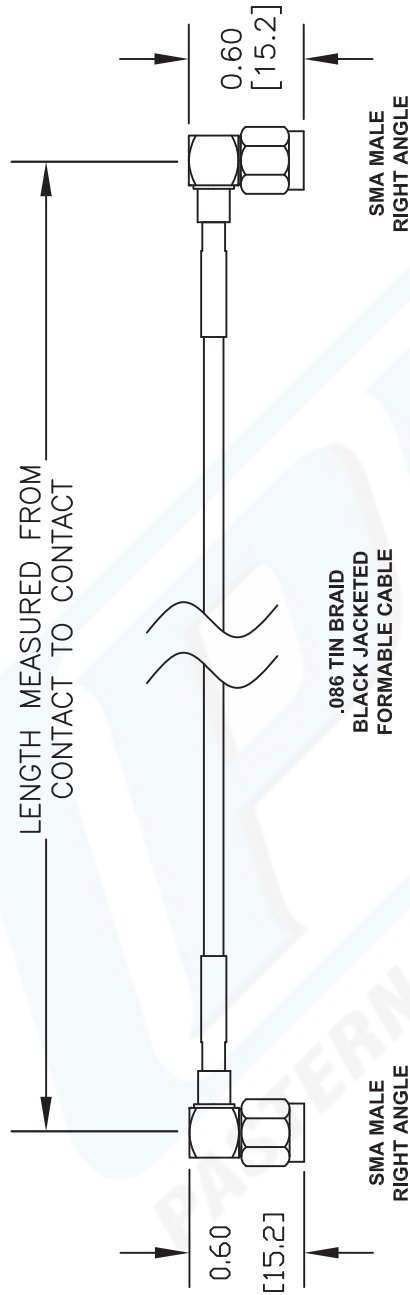

**Note: This part is lead free.**

| Part Number Configuration |  | How To Order |                  |
|---------------------------|--|--------------|------------------|
| PE3                       | zzz yy - xx uu                         | Part # Ext.  | Length In Inches |
| 00 - 99999                | LF = Lead Free<br>< Blank > = Standard | -12          | 12"              |
|                           | Note: LF applies only to RF cables     | -24          | 24"              |
|                           |  | -36          | 36"              |
|                           |  | -48          | 48"              |
|                           |  | -60          | 60"              |
|                           |  | -xx          | Custom Length    |
|                           |  | -25CM        | 25Cm             |
|                           |  | -50CM        | 50Cm             |
|                           |  | -75CM        | 75Cm             |
|                           |  | -100CM       | 100Cm            |
|                           |  | -125CM       | 125Cm            |
|                           |  | -xxCM        | Custom Length    |

**PASTERNAK ENTERPRISES®**  
ESTABLISHED 1972

**PASTERNAK ENTERPRISES, INC.**  
P.O. BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451  
WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
**COAXIAL & FIBER OPTICS**

DWG TITLE  
**PE39430**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES (mm).  
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

REV. - FSCM NO. 53919 CAD FILE 041912 SCALE N/A SIZE A 2231