LUMINIS

Wall mount / Ceiling mount

Specification A.D.A compliant


4 1/2"

38"

All exposed cast aluminum components are made of non corrosive pure aluminum copper free (Aluminum is less than .1% copper content.#356 alloy.)

> Finish: All polyester powder baked coatings preceded with a 5 baths preparation process. Meets military grade MIL-C781706 with a 2000 hours salt spray test.

- 75W/600V thermoplastic compact fluorescent socket.
- One-piece molded silicone gasket with memory retention.
 98% P.F.electronic smart
- ballast with end of life detection for compact fluorescent.
- All stainless steel hardware.
- All Moving and removable parts are sealed with a memory retention silicone gasket.
- 1 One piece cast aluminum removable housing for ease of access to lamp and ballast.
- White translucent sealed high impact acrylic diffuser.
- Isolated ballast compartment for compact fluorescent electronic ballast.
- 4- Multiple cast aluminum louver blades built in assembly.

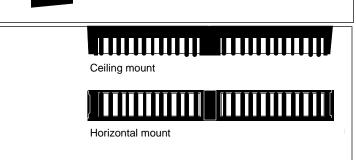

Separate updated technical specification sheets with related models and light sources with I.E.S formatted photometry are available on

www.luminis.com.

Certification **Mounting**

UL. Wet Location.

Max. weight: 13 lbs.

Installation: Mounts over a standard 4" octagonal electrical box with 3 1/2" c/c mounting holes. (by others) additional separate mounting holes are provided with wall plate.

Model# Light source selection Voltage **Finish Options** Standard selection □ SC Round column ☐ WHT:Snow white adaptor ■ BKT: Jet black ☐ **BZT**: Bronze ☐ GRT: Titanium gray ☐ **DGT**: Gun metal COMP. FLUO. PL-L 2G11 ☐ CHT: Champagne ☐ SL102 Smart ballast 120/277 Two lamps ☐ MST: Matte silver ☐ 347 V (To specify) ☐ **GNT**: Forest green ☐ F224 Optional colors (2x24W) ☐ **CS**: Custom color Indicate column diameter in ☐ RAL: RAL# color inches. 12" Min. dia. Ex: SC24 (24"Dia..) L (Lamps by others)

luminaires may be altered for design improvements or discontinued without prior notice.

LUMINIS [USA] - 3555 NW 53rd Court, Fort Lauderdale, FL.33309 LUMINIS [Canada] - 87 C Brunswick D.D.O. Q.C. Canada H9B 2J5 Tel: 954 .717 .4155 Fax: 954 . 717 .4157

Toll free: 888 .401 .6999

Web: www.luminis.com Sept. 2006 Rev. Feb.2007