

**Micro Commercial Components** 



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933

Fax: (818) 701-4939

## BD433/BD435/BD437

### **Features**

- Lead Free Finish/RoHS Compliant (Note1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisure Sensitivity Level 1
- Intended for use in medium power near and switching applications
- With TO-126 package
- The complementary PNP type is BD434, BD436, BD438

## **Maximum Ratings**


Symbol	Parameter		Rating	Unit
$V_{CEO}$	Collector-Emitter Voltage	BD433	22	V
		BD435	32	
		BD437	45	
$V_{CBO}$	Collector-Base Voltage	BD433	22	V
		BD435	32	
		BD437	45	
V <sub>EBO</sub>	Emitter-Base Voltage	BD433		V
		BD435	5.0	
		BD437		
Ιc	Collector Current		4.0	Α
Pc	Collector power dissipation		1.25	W
TJ	Junction Temperature		-55 to +150	$^{\circ}\!\mathbb{C}$
T <sub>STG</sub>	Storage Temperature		-55 to +150	$^{\circ}\!\mathbb{C}$

#### Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter		Min	Max	Units			
OFF CHARA	OFF CHARACTERISTICS							
V <sub>(BR)CEO</sub>	Collector-Emitter Breakdowr (I <sub>C</sub> =100mAdc, I <sub>B</sub> =0)	Voltage BD433 BD435 BD437	22 32 45	  	Vdc			
V <sub>(BR)</sub> CBO	Collector-Base Breakdown \ (I <sub>c</sub> =100 μ Adc, I <sub>E</sub> =0)	oltage BD433 BD435 BD437	22 32 45	  	Vdc			
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage (I <sub>E</sub> =100 μ Adc, I <sub>C</sub> =0)		5		Vdc			
Ісво	Collector-Base Cutoff Currer $(V_{CB}=22Vdc,I_{E}=0)$ $(V_{CB}=32Vdc,I_{E}=0)$ $(V_{CB}=45Vdc,I_{E}=0)$	nt BD433 BD435 BD437		1.0	uAdc			
I <sub>CEO</sub>	Collector-Base Cutoff Currer $(V_{CE}=22Vdc,I_{E}=0)$ $(V_{CE}=32Vdc,I_{E}=0)$ $(V_{CE}=45Vdc,I_{E}=0)$	nt BD433 BD435 BD437		10	uAdc			
I <sub>EBO</sub>	Emitter-Base Cutoff Current (V <sub>EB</sub> =5.0Vdc, I <sub>C</sub> =0)			1.0	uAdc			

Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7.

# NPN Silicon Power Transistors

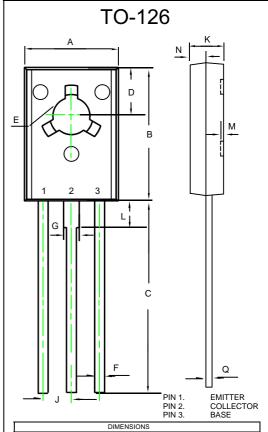

	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
Α	0.291	0.307	7.40	7.80	
В	0.417	0.433	10.60	11.00	
С	0.602	0.618	15.30	15.70	
D	0.154	0.161	3.90	4.10	
E	0.118	0.126	3.00	3.20	
F	0.026	0.034	0.66	0.86	
G	0.046	0.054	1.17	1.37	
J	0.090TY	0.090TYP		2.290TYP	
K	0.098	0.114	2.50	2.90	
L	0.083	0.091	2.10	2.30	
M	0.000	0.012	0.00	0.30	
N	0.043	0.059	1.10	1.50	
Q	0.018	0.024	0.45	0.60	

# BD433, BD435, BD437



#### ON CHARACTERISTICS

UN UNANA	ICTEMISTICS			
h <sub>FE-1</sub>	DC Current Gain (I <sub>C</sub> =500mAdc, V <sub>CE</sub> =1.0Vdc)		85	 
h <sub>FE-2</sub>	DC Current Gain (I <sub>C</sub> =10mAdc, V <sub>CE</sub> =5.0Vdc)	BD433/BD435 BD437	40 30	 
h <sub>FE-3</sub>	DC Current Gain $(I_C=2Adc, V_{CE}=1.0Vdc)$	BD433/BD435 BD437	50 40	 
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage (I <sub>C</sub> =2.0Adc, I <sub>B</sub> =0.2Adc)	BD433/BD435 BD437	0.5 0.6	 Vdc
$V_{BE}$	Base-Emitter Voltage (V <sub>CE</sub> =1.0Vdc,I <sub>C</sub> =2.0Adc)	BD433/BD435 BD437	1.1 1.2	 Vdc
f⊤	Transition Frequency		3.0	 MHz



#### **Micro Commercial Components**

#### **Ordering Information:**

Device	Packing
Part Number-BP	Bulk; 1Kpcs/Box

#### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.